

# AGRICULTURE PACKAGED SYSTEMS

HYDRO MULTI-B



be  
think  
innovate

**GRUNDFOS** 



# CONTENTS

4 HYDRO MULTI-B SELECTION GUIDE								
Pg. #	Product name	HP	Rated speed [rpm]	Stages	Number of pumps	Pipe connection	1 PH	3 PH
6	HYDRO MULTI-B/E 2 CME3-3	1.5	3600	3	2	2NPT	●	
8	HYDRO MULTI-B/E 2 CME3-5	1.5	3600	5	2	2NPT	●	
10	HYDRO MULTI-B/E 2 CME5-3	1.5	3600	3	2	2NPT	●	
12	HYDRO MULTI-B/E 2 CME5-4	2	3600	4	2	2NPT	●	●
18	HYDRO MULTI-B/E 2 CME5-5	2	3600	5	2	2NPT	●	●
20	HYDRO MULTI-B/E 2 CME10-1	1.5	3600	1	2	2.5NPT	●	
22	HYDRO MULTI-B/E 2 CME10-2	3	3600	2	2	2.5NPT		●
26	HYDRO MULTI-B/E 2 CME10-3	5	3600	3	2	2.5NPT		●
30	HYDRO MULTI-B/E 2 CME15-1	3	3600	1	2	3ANSI		●
34	HYDRO MULTI-B/E 2 CME15-2	5	3600	2	2	3ANSI		●
38	HYDRO MULTI-B/E 2 CME15-3	7.5	3600	3	2	3ANSI		●
42	HYDRO MULTI-B/E 3 CME3-3	1.5	3600	3	3	2NPT	●	
44	HYDRO MULTI-B/E 3 CME3-5	1.5	3600	5	3	2NPT	●	
46	HYDRO MULTI-B/E 3 CME5-3	1.5	3600	3	3	2NPT	●	
48	HYDRO MULTI-B/E 3 CME5-4	2	3600	4	3	2NPT	●	●
54	HYDRO MULTI-B/E 3 CME5-5	2	3600	5	3	2NPT		●
56	HYDRO MULTI-B/E 3 CME10-1	1.5	3600	1	3	2.5NPT	●	
58	HYDRO MULTI-B/E 3 CME10-2	3	3600	2	3	2.5NPT		●
62	HYDRO MULTI-B/E 3 CME10-3	5	3600	3	3	2.5NPT		●
66	HYDRO MULTI-B/E 3 CME15-1	3	3600	1	3	4ANSI		●
70	HYDRO MULTI-B/E 3 CME15-2	5	3600	2	3	4ANSI		●
74	HYDRO MULTI-B/E 3 CME15-3	7.5	3600	3	3	4ANSI		●

# HYDRO MULTI-B SELECTION GUIDE


1																
TDH	10	20	30	40	50	60	70	80	90	100	110	120	130	140	150	160
FT	GPM	GPM	GPM	GPM	GPM	GPM	GPM	GPM	GPM	GPM	GPM	GPM	GPM	GPM	GPM	GPM
24	2CME3-3	2CME3-3	2CME3-3	2CME3-3	2CME5-3	2CME5-3	3CME5-3	3CME5-3	3CME5-3	2CME10-1	2CME10-1	2CME10-1	2CME10-1	2CME10-1	2CME15-1	2CME15-1
36	2CME3-3	2CME3-3	2CME3-3	2CME3-3	2CME5-3	2CME5-3	3CME5-3	3CME5-3	3CME5-3	2CME10-1	2CME10-1	2CME10-1	2CME10-1	2CME10-1	2CME15-1	2CME15-1
48	2CME3-3	2CME3-3	2CME3-3	2CME3-3	2CME5-3	2CME5-3	3CME5-3	3CME5-3	3CME5-3	2CME10-2	2CME10-2	2CME10-2	2CME10-2	2CME10-2	2CME15-1	2CME15-1
60	2CME3-3	2CME3-3	2CME3-3	2CME3-3	2CME5-3	2CME5-3	3CME5-3	3CME5-3	3CME5-3	2CME10-2	2CME10-2	2CME10-2	2CME10-2	2CME10-2	2CME15-2	2CME15-2
72	2CME3-3	2CME3-3	2CME3-3	2CME3-3	2CME5-3	2CME5-3	3CME5-3	3CME5-3	3CME5-3	2CME10-2	2CME10-2	2CME10-2	2CME10-2	2CME10-2	2CME15-2	2CME15-2
84	2CME3-3	2CME3-3	2CME3-3	2CME3-3	2CME5-3	2CME5-3	3CME5-3	3CME5-3	3CME5-3	2CME10-2	2CME10-2	2CME10-2	2CME10-2	2CME10-2	2CME15-2	2CME15-2
96	2CME3-5	2CME3-5	2CME3-5	2CME3-5	2CME5-3	2CME5-3	3CME5-3	3CME5-3	3CME5-3	2CME10-2	2CME10-2	2CME10-2	2CME10-2	2CME10-2	2CME15-2	2CME15-2
108	2CME3-5	2CME3-5	2CME3-5	2CME3-5	2CME5-4	2CME5-4	3CME5-4	3CME5-4	3CME5-4	2CME10-2	2CME10-2	2CME10-3	2CME10-3	2CME10-3	2CME15-2	2CME15-2
120	2CME3-5	2CME3-5	2CME3-5	2CME3-5	2CME5-4	2CME5-4	3CME5-4	3CME5-4	3CME5-4	2CME10-3	2CME10-3	2CME10-3	2CME10-3	2CME10-3	2CME15-2	2CME15-2
132	2CME3-5	2CME3-5	2CME3-5	2CME3-5	2CME5-4	2CME5-4	3CME5-5	3CME5-5	3CME5-5	2CME10-3	2CME10-3	2CME10-3	2CME10-3	2CME10-3	2CME15-3	2CME15-3
144	2CME3-5	2CME3-5	2CME3-5	2CME5-4	2CME5-4	2CME5-5	3CME5-5	3CME5-5	3CME5-5	2CME10-3	2CME10-3	2CME10-3	2CME10-3	2CME10-3	2CME15-3	2CME15-3
156	2CME3-5	2CME3-5	2CME5-4	2CME5-5	2CME5-5	2CME5-5	3CME5-5	3CME5-5	3CME5-5	2CME10-3	2CME10-3	2CME10-3	2CME10-3	2CME15-3	2CME15-3	2CME15-3
168	2CME3-5	2CME3-5	2CME5-4	2CME5-5	2CME5-5	3CME5-5	3CME5-5	3CME5-5	2CME10-3	2CME10-3	2CME10-3	2CME10-3	2CME15-3	2CME15-3	2CME15-3	2CME15-3
180	2CME3-5	2CME5-4	2CME5-5	2CME5-5	2CME5-5	3CME5-5	3CME5-5	2CME10-3	2CME10-3	2CME10-3	2CME10-3	2CME15-3	2CME15-3	2CME15-3	2CME15-3	2CME15-3
192	2CME3-5	2CME5-5	2CME5-5	2CME5-5	3CME5-5	3CME5-5	2CME10-3	2CME10-3	2CME10-3	2CME10-3	2CME15-3	2CME15-3	2CME15-3	2CME15-3	2CME15-3	2CME15-3
204	2CME3-5	2CME5-5	2CME5-5	2CME5-5	3CME5-5	2CME10-3	2CME10-3	2CME10-3	2CME10-3	2CME15-3	2CME15-3	2CME15-3	2CME15-3	2CME15-3	2CME15-3	2CME15-3

# GRUNDFOS HYDRO MULTI-B | AGRICULTURE PACKAGED SYSTEMS



170 GPM	180 GPM	190 GPM	200 GPM	210 GPM	220 GPM	230 GPM	240 GPM	250 GPM	260 GPM	270 GPM	280 GPM	290 GPM	300 GPM	310 GPM	320 GPM	330 GPM	TDH FT
2CME15-1	2CME15-1	2CME15-1	2CME15-1	3CME10-1	3CME15-1	3CME15-1	3CME15-1	3CME15-1	3CME15-1	3CME15-1	3CME15-1	3CME15-1	3CME15-1	3CME15-1	3CME15-1	3CME15-1	24
2CME15-1	2CME15-1	2CME15-1	2CME15-1	3CME10-1	3CME15-1	3CME15-1	3CME15-1	3CME15-1	3CME15-1	3CME15-1	3CME15-1	3CME15-1	3CME15-1	3CME15-1	3CME15-1	3CME15-1	36
2CME15-1	2CME15-1	2CME15-1	2CME15-1	3CME10-2	3CME15-1	3CME15-1	3CME15-1	3CME15-1	3CME15-1	3CME15-1	3CME15-1	3CME15-1	3CME15-1	3CME15-1	3CME15-1	3CME15-1	48
2CME15-2	2CME15-2	2CME15-2	2CME15-2	3CME10-2	3CME15-1	3CME15-1	3CME15-1	3CME15-1	3CME15-1	3CME15-1	3CME15-2	3CME15-2	3CME15-2	3CME15-2	3CME15-2	3CME15-2	60
2CME15-2	2CME15-2	2CME15-2	2CME15-2	3CME10-2	3CME15-2	3CME15-2	3CME15-2	3CME15-2	3CME15-2	3CME15-2	3CME15-2	3CME15-2	3CME15-2	3CME15-2	3CME15-2	3CME15-2	72
2CME15-2	2CME15-2	2CME15-2	2CME15-2	3CME10-2	3CME15-2	3CME15-2	3CME15-2	3CME15-2	3CME15-2	3CME15-2	3CME15-2	3CME15-2	3CME15-2	3CME15-2	3CME15-2	3CME15-2	84
2CME15-2	2CME15-2	2CME15-2	2CME15-2	3CME15-2	3CME15-2	3CME15-2	3CME15-2	3CME15-2	3CME15-2	3CME15-2	3CME15-2	3CME15-2	3CME15-2	3CME15-2	3CME15-2	3CME15-2	96
2CME15-2	2CME15-2	2CME15-2	2CME15-2	3CME10-3	3CME15-2	3CME15-2	3CME15-2	3CME15-2	3CME15-2	3CME15-2	3CME15-2	3CME15-2	3CME15-2	3CME15-2	3CME15-2	3CME15-2	108
2CME15-2	2CME15-2	2CME15-3	2CME15-3	3CME10-3	3CME15-2	3CME15-2	3CME15-2	3CME15-2	3CME15-2	3CME15-2	3CME15-2	3CME15-2	3CME15-3	3CME15-3	3CME15-3	3CME15-3	120
2CME15-3	2CME15-3	2CME15-3	2CME15-3	3CME10-3	3CME15-2	3CME15-2	3CME15-2	3CME15-2	3CME15-2	3CME15-3	3CME15-3	3CME15-3	3CME15-3	3CME15-3	3CME15-3	3CME15-3	132
2CME15-3	2CME15-3	2CME15-3	2CME15-3	3CME10-3	3CME15-3	3CME15-3	3CME15-3	3CME15-3	3CME15-3	3CME15-3	3CME15-3	3CME15-3	3CME15-3	3CME15-3	3CME15-3	3CME15-3	144
2CME15-3	2CME15-3	2CME15-3	2CME15-3	3CME15-3	3CME15-3	3CME15-3	3CME15-3	3CME15-3	3CME15-3	3CME15-3	3CME15-3	3CME15-3	3CME15-3	3CME15-3	3CME15-3	3CME15-3	156
2CME15-3	2CME15-3	2CME15-3	2CME15-3	3CME15-3	3CME15-3	3CME15-3	3CME15-3	3CME15-3	3CME15-3	3CME15-3	3CME15-3	3CME15-3	3CME15-3	3CME15-3	3CME15-3	3CME15-3	N/A
2CME15-3	2CME15-3	2CME15-3	2CME15-3	3CME15-3	3CME15-3	3CME15-3	3CME15-3	3CME15-3	3CME15-3	3CME15-3	3CME15-3	3CME15-3	3CME15-3	3CME15-3	3CME15-3	N/A	N/A
2CME15-3	2CME15-3	2CME15-3	3CME15-3	3CME15-3	3CME15-3	3CME15-3	3CME15-3	3CME15-3	3CME15-3	3CME15-3	3CME15-3	3CME15-3	3CME15-3	N/A	N/A	N/A	192
2CME15-3	2CME15-3	3CME15-3	3CME15-3	3CME15-3	3CME15-3	3CME15-3	3CME15-3	3CME15-3	3CME15-3	3CME15-3	3CME15-3	3CME15-3	N/A	N/A	N/A	N/A	204

# 91149101 HYDRO MULTI-B/E 2 CME3-3 60 Hz

Description	Value
<b>General information:</b>	
Product name:	HYDRO MULTI-B/E 2 CME3-3
Product No.:	91149101
EAN:	5711490041156
<b>Technical:</b>	
Rated flow:	32.6 US gpm
Min flow system:	4.4 US gpm
Rated head:	97.45 ft
Head max:	129.3 ft
Main pump name:	CME3-3
Main pump Number:	98395056
Number of pumps:	2
Model:	A
<b>Materials:</b>	
Pump:	EN-GJL-200
Manifolds:	EN/DIN 1.4571/ AISI 316 TI
<b>Installation:</b>	
Maximum operating pressure:	145 psi
Pipe connection:	2NPT
<b>Liquid:</b>	
Pumped liquid:	Water
Liquid temperature range:	32 .. 140 °F
Liquid temperature during operation:	68 °F
Density:	62.29 lb/ft³
<b>Electrical data:</b>	
Power (P2) main pump:	1.5 HP
Main frequency:	60 Hz
Rated voltage:	1 x 200-240 V
Starting main:	electronically
Rated current of system:	13.1 A
<b>Controls:</b>	
Control type:	E
Operation unit:	CU323-2
<b>Tank:</b>	
Diaphragm tank:	No
<b>Others:</b>	
Net weight:	193 lb
Gross weight:	309 lb
Product range:	NAMREG
Custom tariff no.:	8413.70.2040

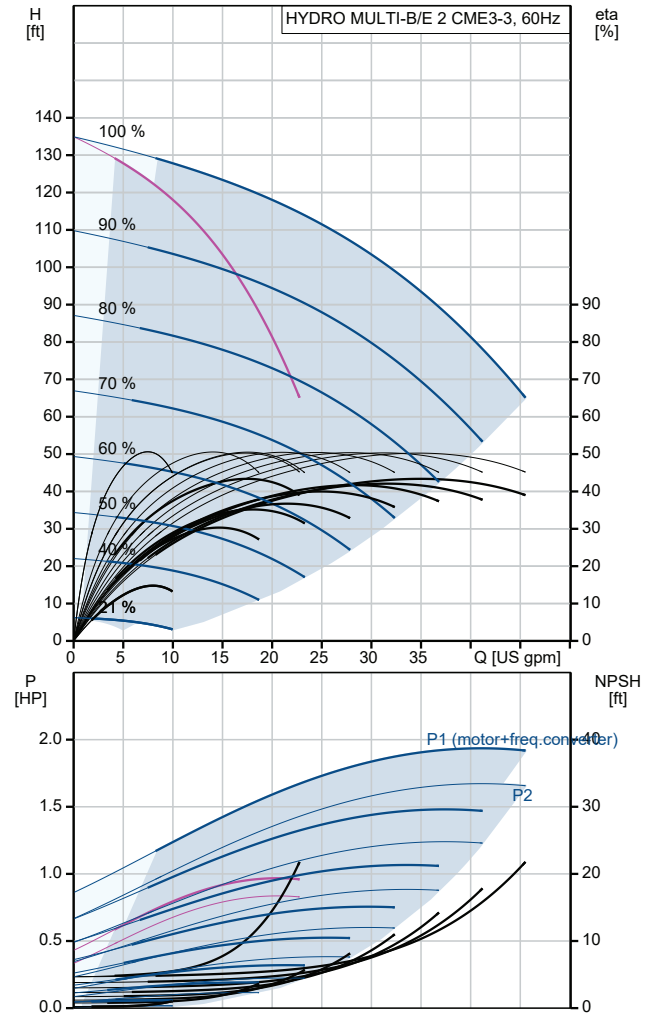


# 91149101 HYDRO MULTI-B/E 2 CME3-3 60 Hz

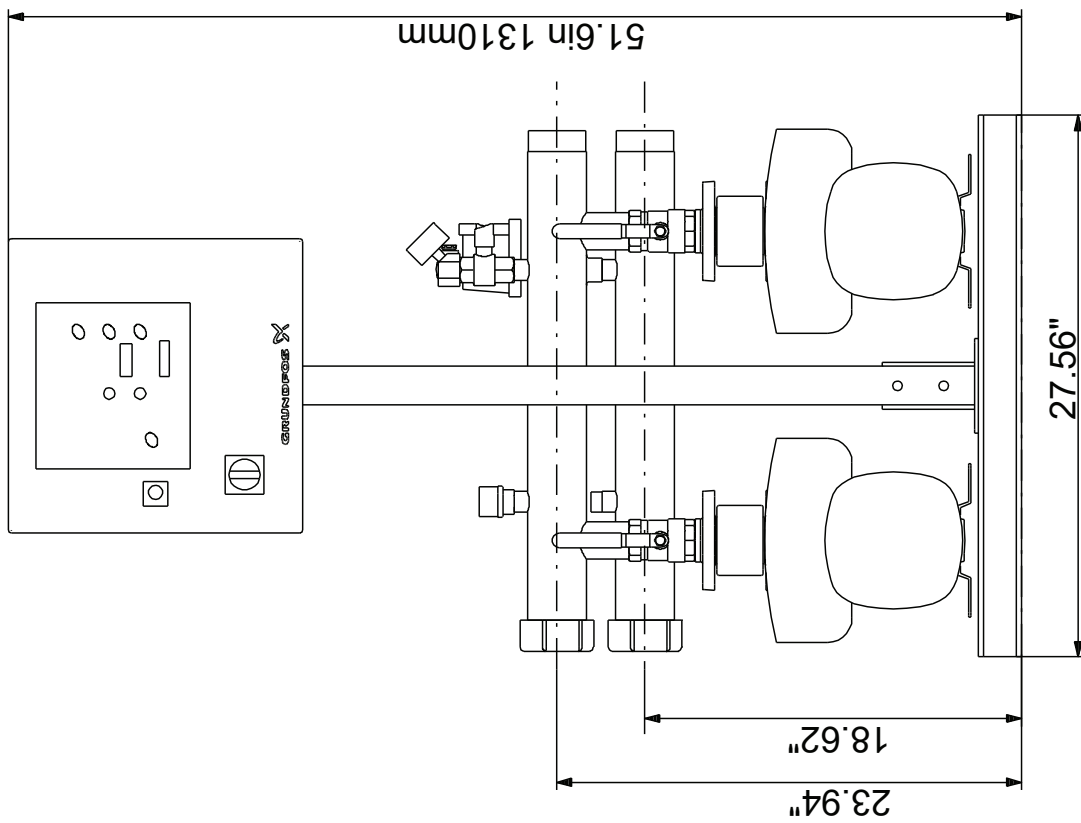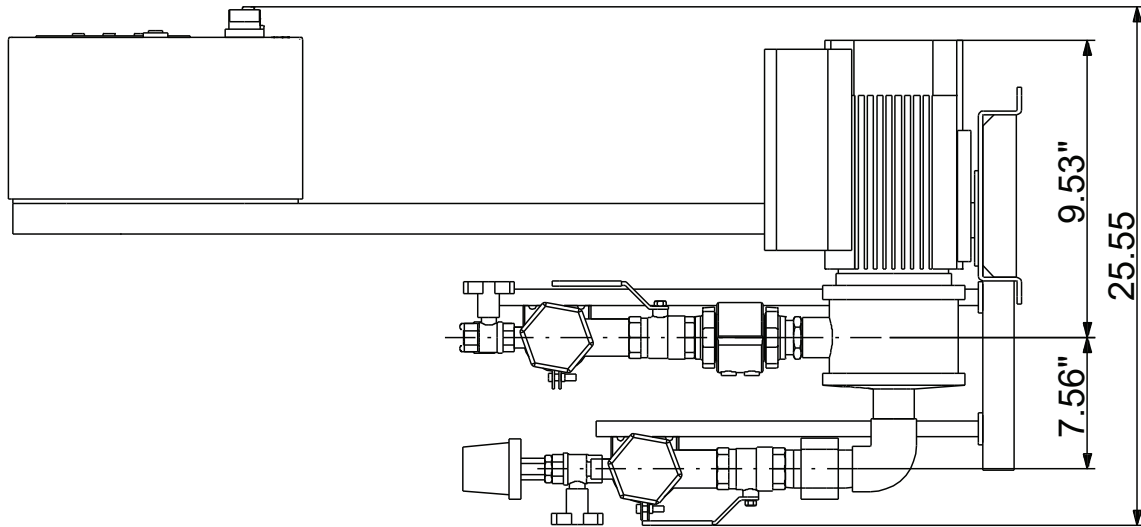



# 91149102 HYDRO MULTI-B/E 2 CME3-5 60 Hz

Description	Value
<b>General information:</b>	
Product name:	HYDRO MULTI-B/E 2 CME3-5
Product No.:	91149102
EAN:	5711490041163
<b>Technical:</b>	
Rated flow:	32.6 US gpm
Min flow system:	4.4 US gpm
Rated head:	164.1 ft
Head max:	217.2 ft
Main pump name:	CME3-5
Main pump Number:	98395082
Number of pumps:	2
Model:	A
<b>Materials:</b>	
Pump:	EN-GJL-200
Manifolds:	EN/DIN 1.4571/ AISI 316 TI
<b>Installation:</b>	
Maximum operating pressure:	145 psi
Pipe connection:	2NPT
<b>Liquid:</b>	
Pumped liquid:	Water
Liquid temperature range:	32 .. 140 °F
Liquid temperature during operation:	68 °F
Density:	62.29 lb/ft <sup>3</sup>
<b>Electrical data:</b>	
Power (P2) main pump:	1.5 HP
Main frequency:	60 Hz
Rated voltage:	1 x 200-240 V
Starting main:	electronically
Rated current of system:	13.1 A
<b>Controls:</b>	
Control type:	E
Operation unit:	CU323-2
<b>Tank:</b>	
Diaphragm tank:	No
<b>Others:</b>	
Net weight:	193 lb
Gross weight:	309 lb
Product range:	NAMREG
Custom tariff no.:	8413.70.2040

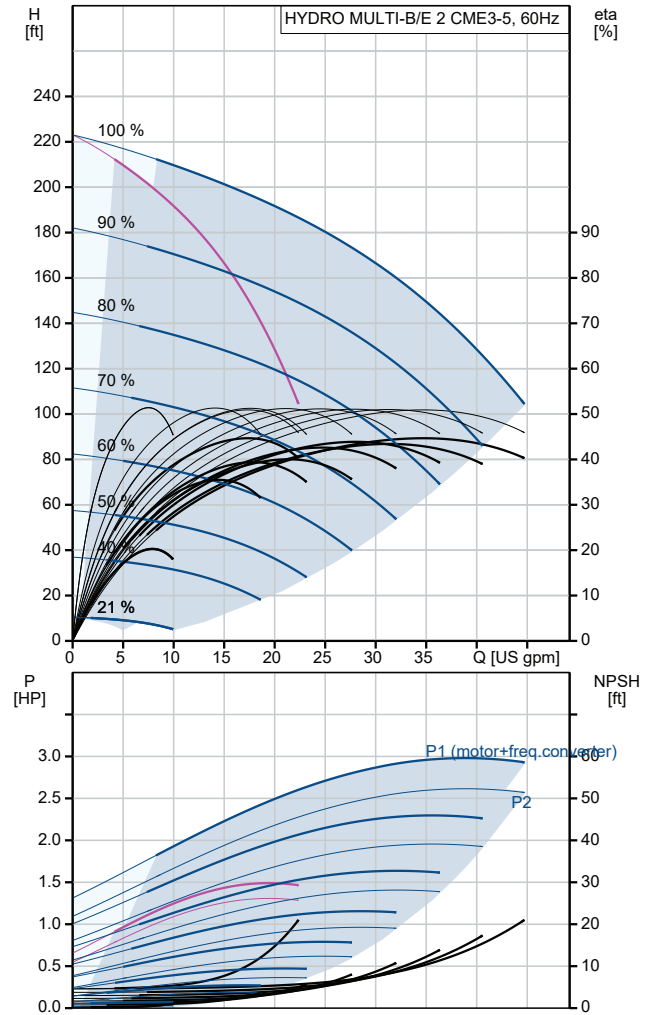




# 91149102 HYDRO MULTI-B/E 2 CME3-5 60 Hz

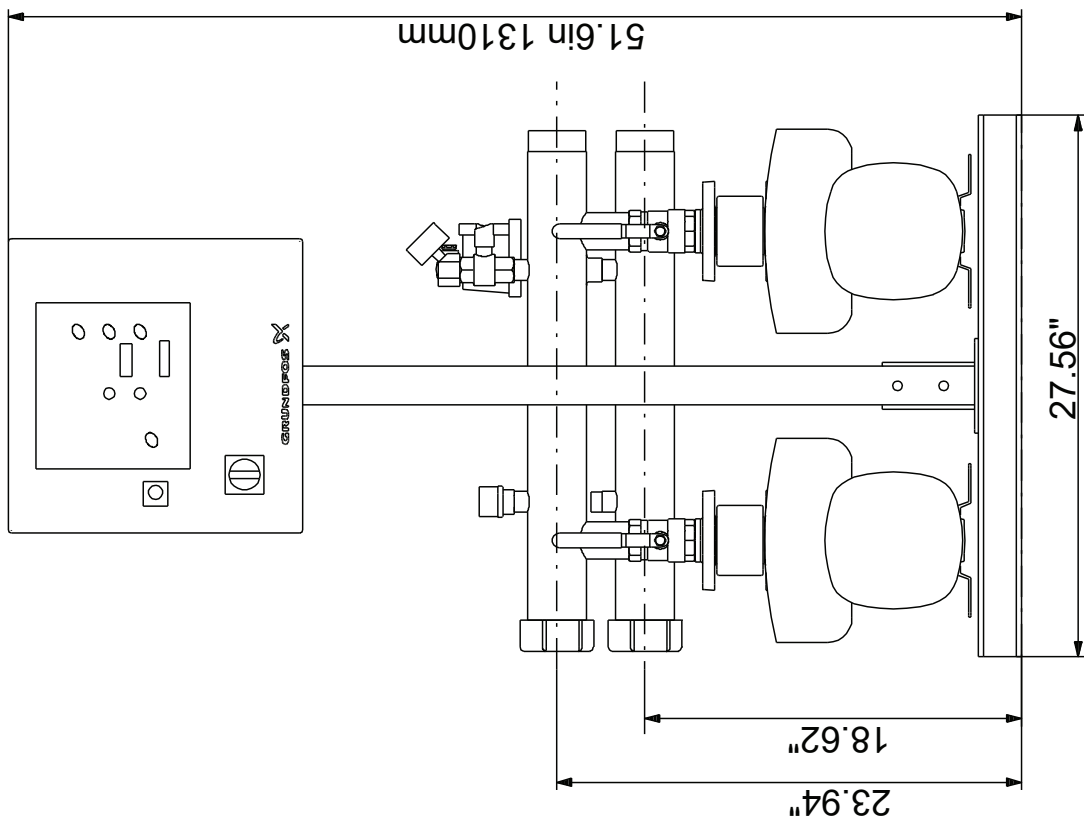
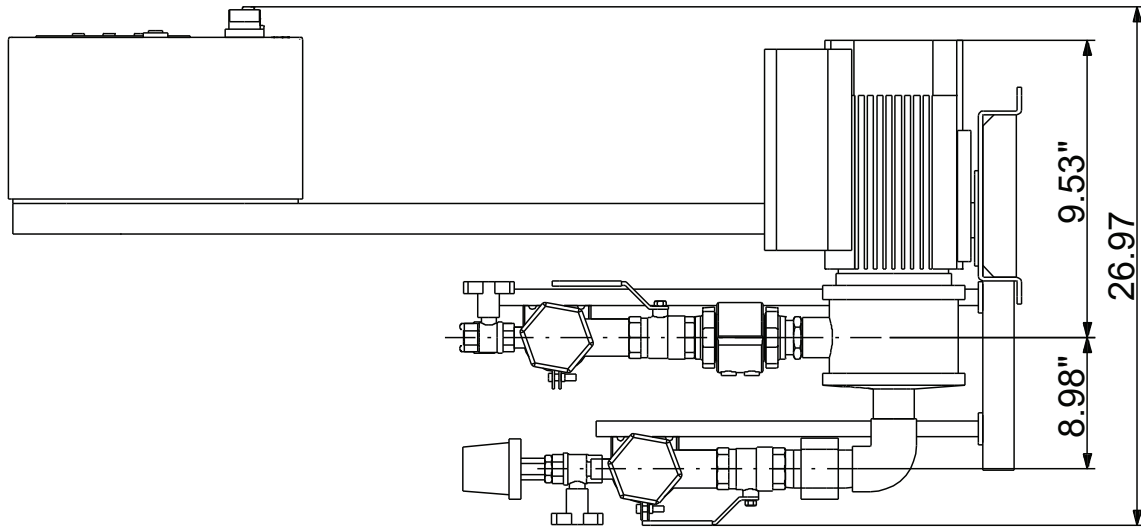


# 91149105 HYDRO MULTI-B/E 2 CME5-3 60 Hz

Description	Value
<b>General information:</b>	
Product name:	HYDRO MULTI-B/E 2 CME5-3
Product No.:	91149105
EAN:	5711490038460
<b>Technical:</b>	
Rated flow:	49.3 US gpm
Min flow system:	7.04 US gpm
Rated head:	107.6 ft
Head max:	130.6 ft
Main pump name:	CME5-3
Main pump Number:	98395101
Number of pumps:	2
Model:	A
<b>Materials:</b>	
Pump:	EN-GJL-200
Manifolds:	EN/DIN 1.4571/ AISI 316 TI
<b>Installation:</b>	
Maximum operating pressure:	145 psi
Pipe connection:	2NPT
<b>Liquid:</b>	
Pumped liquid:	Water
Liquid temperature range:	32 .. 140 °F
Liquid temperature during operation:	68 °F
Density:	62.29 lb/ft³
<b>Electrical data:</b>	
Power (P2) main pump:	1.5 HP
Main frequency:	60 Hz
Rated voltage:	1 x 200-240 V
Starting main:	electronically
Rated current of system:	13.1 A
<b>Controls:</b>	
Control type:	E
Operation unit:	CU323-2
<b>Tank:</b>	
Diaphragm tank:	No
<b>Others:</b>	
Net weight:	193 lb
Gross weight:	309 lb
Product range:	NAMREG
Custom tariff no.:	8413.70.2040

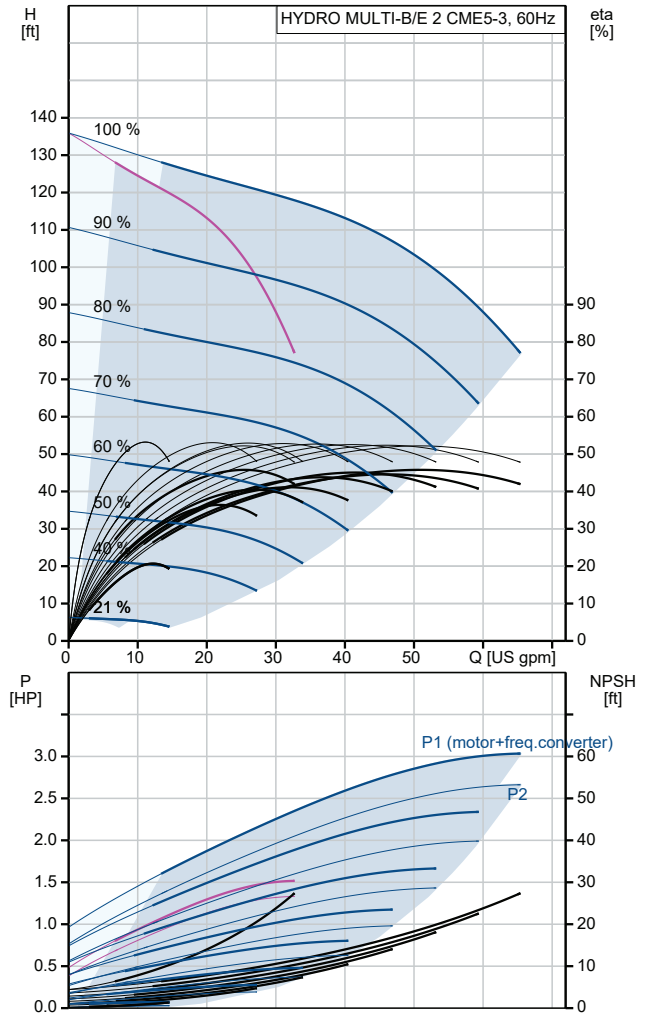


# 91149105 HYDRO MULTI-B/E 2 CME5-3 60 Hz

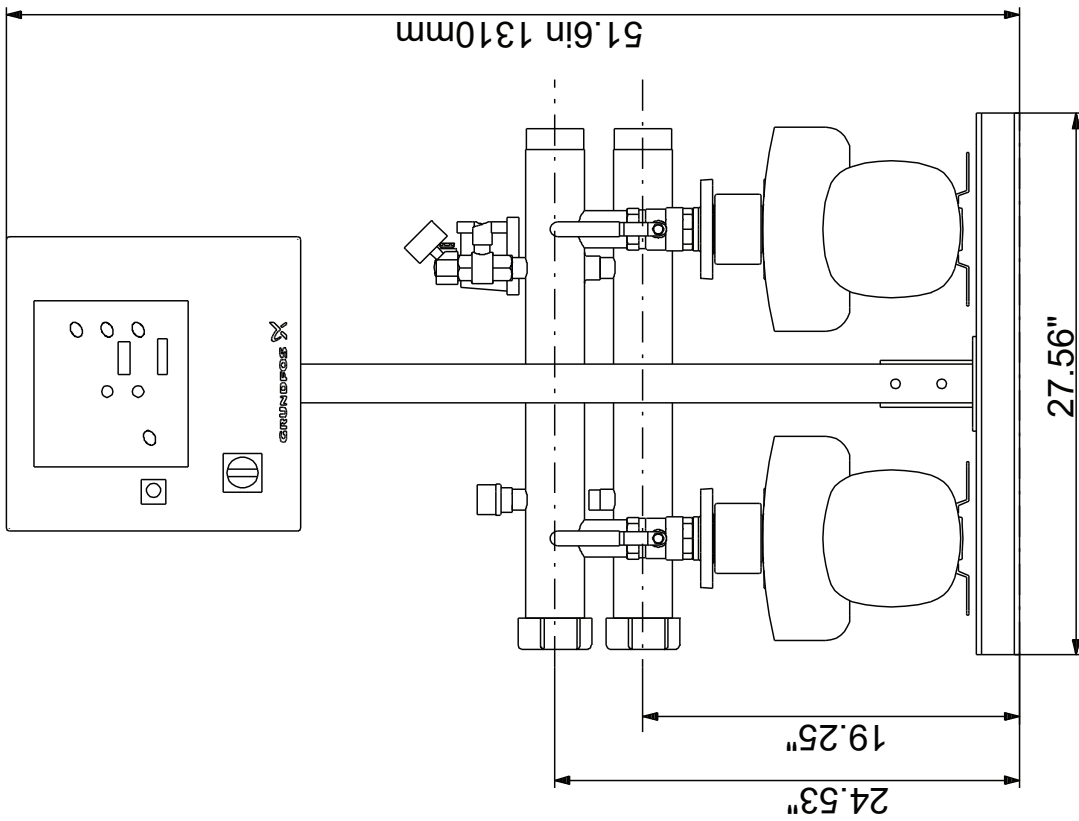
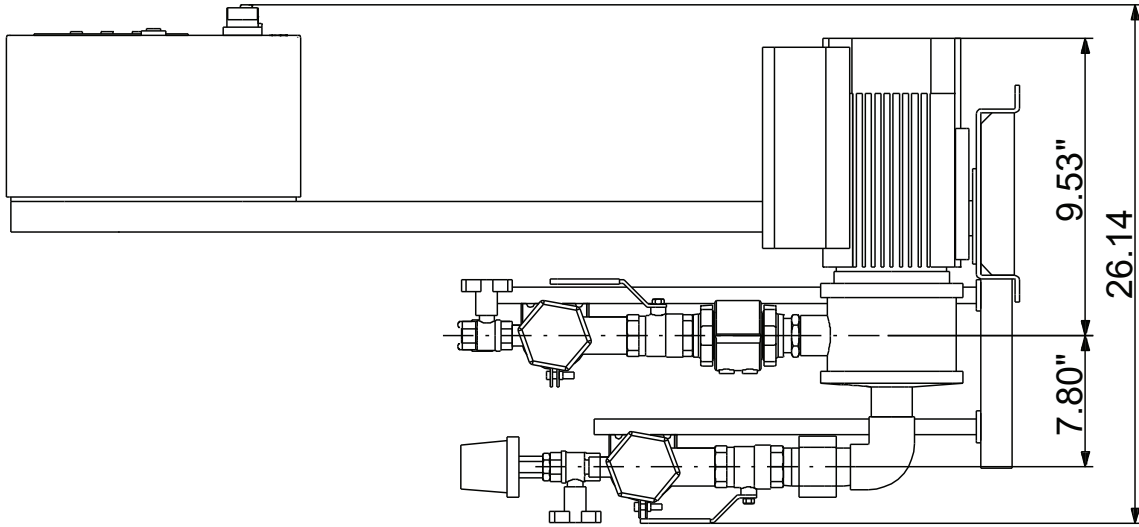


# 91149106 HYDRO MULTI-B/E 2 CME5-4 60 Hz

Description	Value
<b>General information:</b>	
Product name:	HYDRO MULTI-B/E 2 CME5-4
Product No.:	91149106
EAN:	5711490041194
<b>Technical:</b>	
Rated flow:	49.3 US gpm
Min flow system:	7.04 US gpm
Rated head:	145 ft
Head max:	174.9 ft
Main pump name:	CME5-4
Main pump Number:	98395336
Number of pumps:	2
Model:	A
<b>Materials:</b>	
Pump:	EN-GJL-200
Manifolds:	EN/DIN 1.4571/ AISI 316 TI
<b>Installation:</b>	
Maximum operating pressure:	145 psi
Pipe connection:	2NPT
<b>Liquid:</b>	
Pumped liquid:	Water
Liquid temperature range:	32 .. 140 °F
Liquid temperature during operation:	68 °F
Density:	62.29 lb/ft³
<b>Electrical data:</b>	
Power (P2) main pump:	2 HP
Main frequency:	60 Hz
Rated voltage:	1 x 200-240 V
Starting main:	electronically
Rated current of system:	17.8 A
<b>Controls:</b>	
Control type:	E
Operation unit:	CU323-2
<b>Tank:</b>	
Diaphragm tank:	No
<b>Others:</b>	
Net weight:	208 lb
Gross weight:	324 lb
Product range:	NAMREG
Custom tariff no.:	8413.70.2040

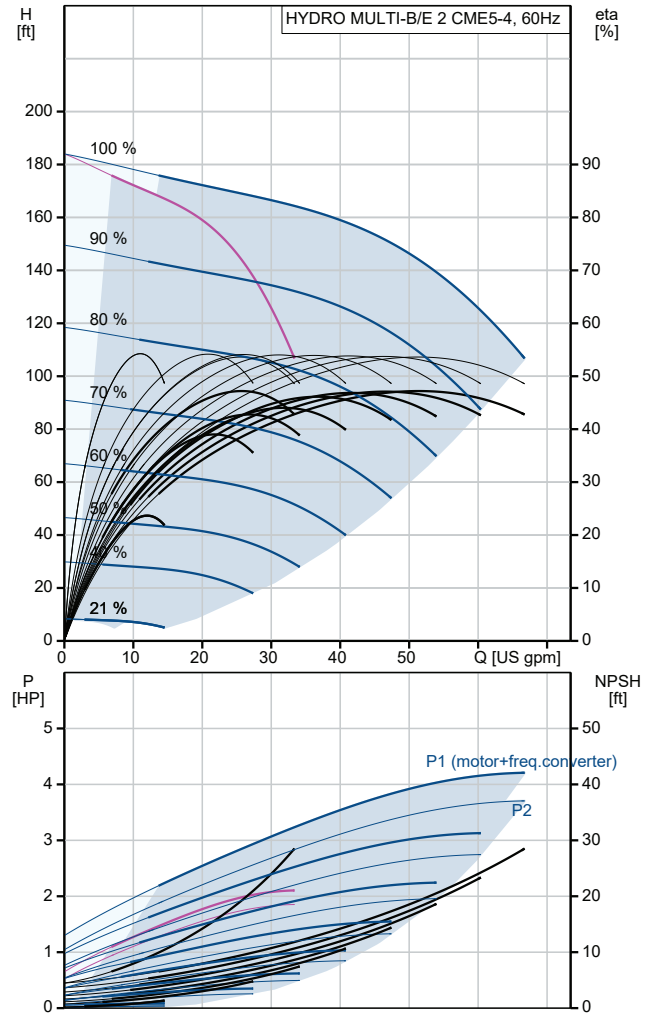


# 91149106 HYDRO MULTI-B/E 2 CME5-4 60 Hz

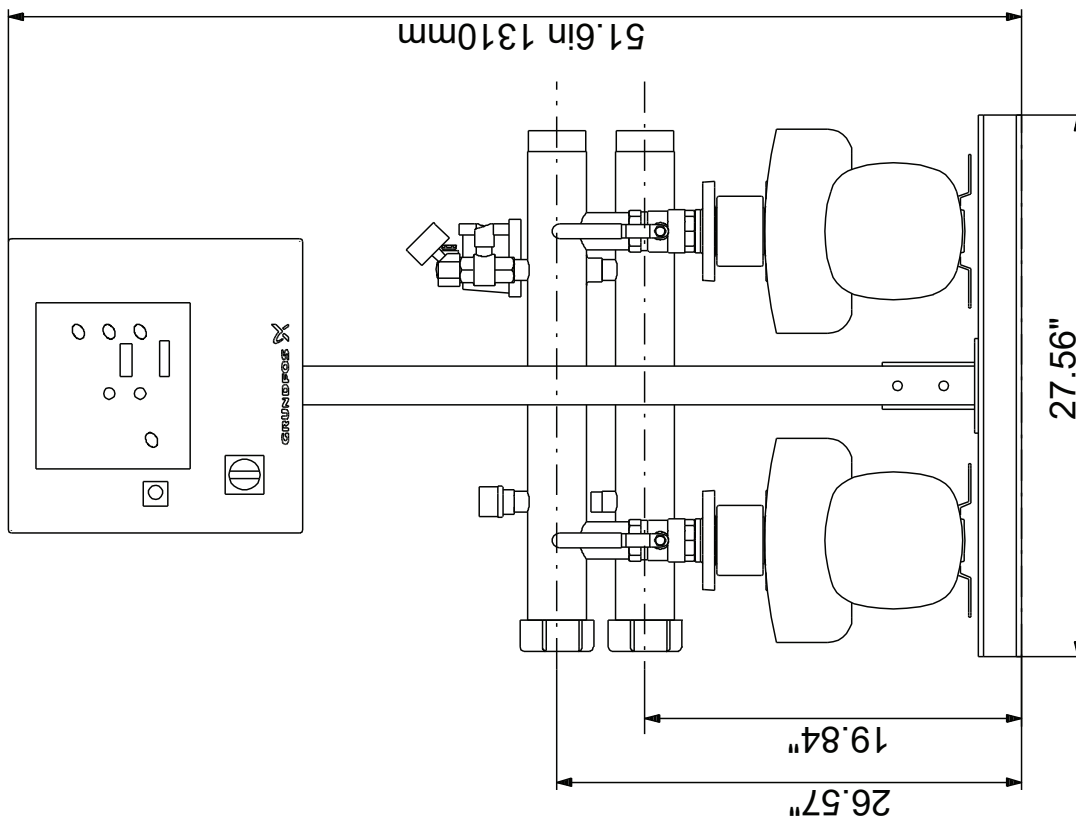
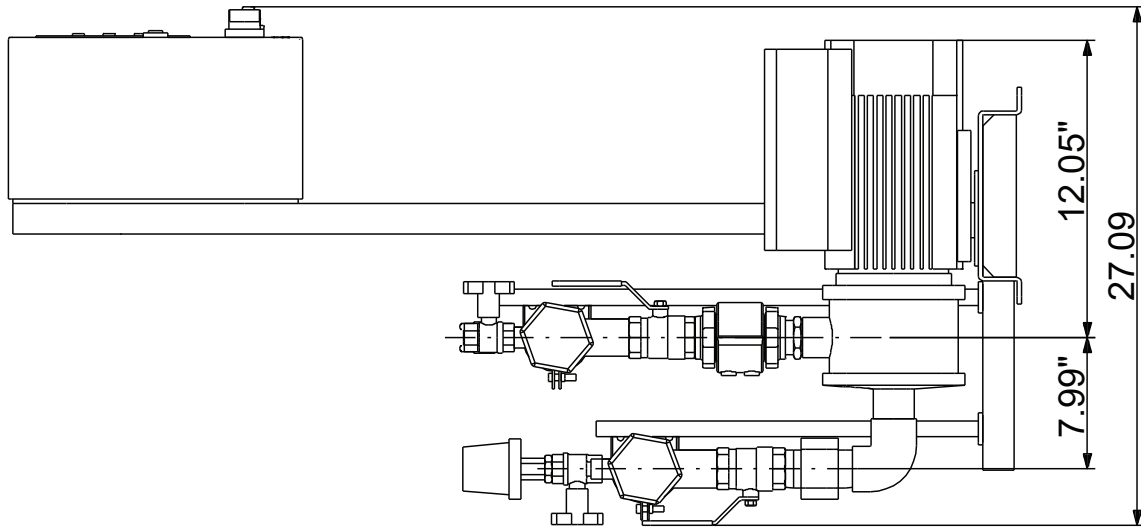


# 91149111 HYDRO MULTI-B/E 2 CME5-4 60 Hz

Description	Value
<b>General information:</b>	
Product name:	HYDRO MULTI-B/E 2 CME5-4
Product No.:	91149111
EAN:	5711490038620
<b>Technical:</b>	
Rated flow:	49.3 US gpm
Min flow system:	7.04 US gpm
Rated head:	145 ft
Head max:	174.9 ft
Main pump name:	CME5-4
Main pump Number:	98126046
Number of pumps:	2
Model:	A
<b>Materials:</b>	
Pump:	EN-GJL-200
Manifolds:	EN/DIN 1.4571/ AISI 316 TI
<b>Installation:</b>	
Maximum operating pressure:	145 psi
Pipe connection:	2NPT
<b>Liquid:</b>	
Pumped liquid:	Water
Liquid temperature range:	32 .. 140 °F
Liquid temperature during operation:	68 °F
Density:	62.29 lb/ft <sup>3</sup>
<b>Electrical data:</b>	
Power (P2) main pump:	2 HP
Main frequency:	60 Hz
Rated voltage:	3 x 208-230 V
Starting main:	electronically
Rated current of system:	11.2 A
<b>Controls:</b>	
Control type:	E
Operation unit:	CU323-2
<b>Tank:</b>	
Diaphragm tank:	No
<b>Others:</b>	
Net weight:	272 lb
Gross weight:	388 lb
Product range:	NAMREG
Custom tariff no.:	8413.70.2040

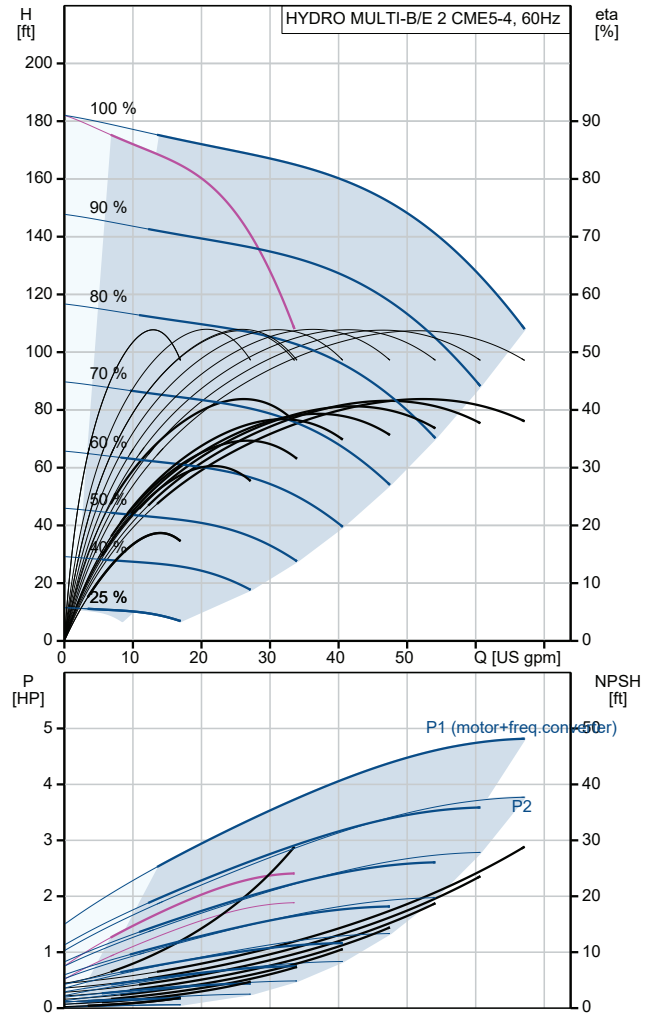


# 91149111 HYDRO MULTI-B/E 2 CME5-4 60 Hz

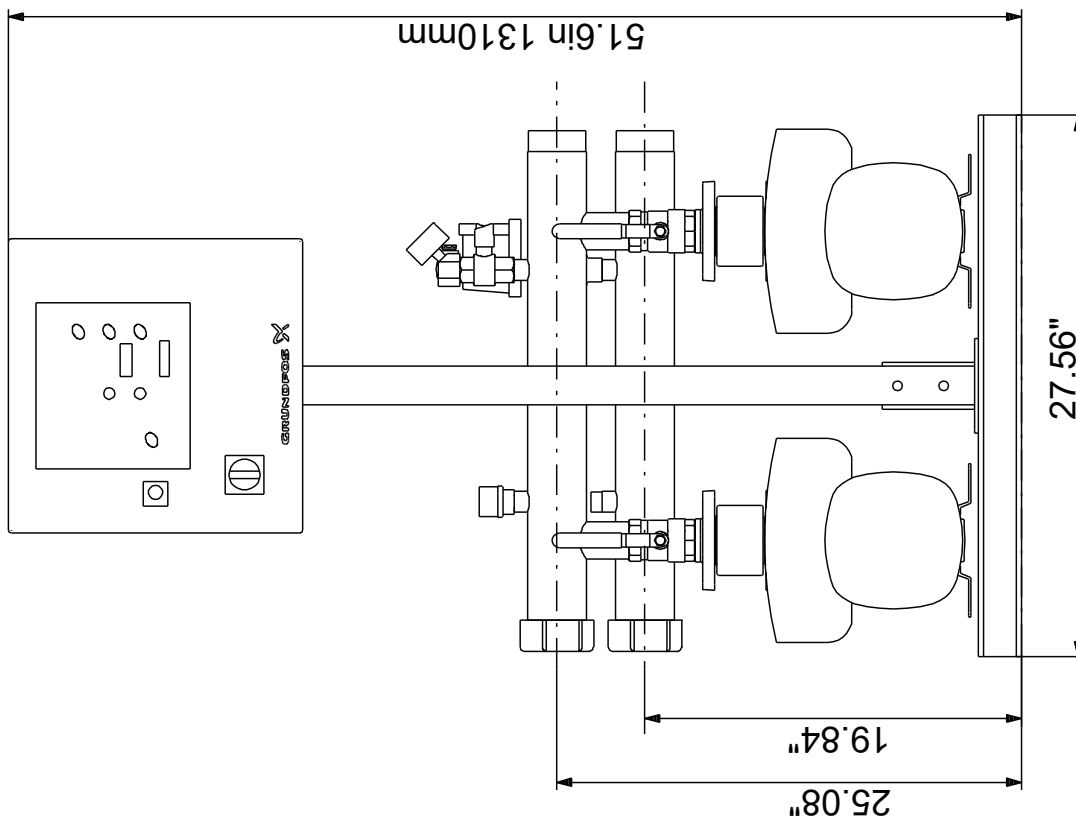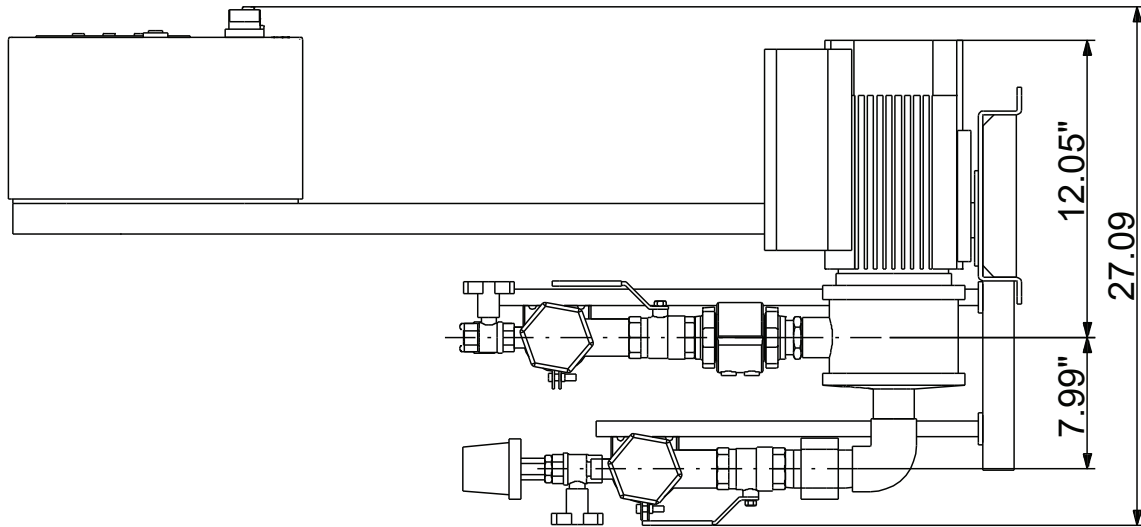



# 91149123 HYDRO MULTI-B/E 2 CME5-4 60 Hz

Description	Value
<b>General information:</b>	
Product name:	HYDRO MULTI-B/E 2 CME5-4
Product No.:	91149123
EAN:	5711490041347
<b>Technical:</b>	
Rated flow:	49.3 US gpm
Min flow system:	7.04 US gpm
Rated head:	145 ft
Head max:	174.9 ft
Main pump name:	CME5-4
Main pump Number:	98395711
Number of pumps:	2
Model:	A
<b>Materials:</b>	
Pump:	EN-GJL-200
Manifolds:	EN/DIN 1.4571/ AISI 316 TI
<b>Installation:</b>	
Maximum operating pressure:	145 psi
Pipe connection:	2NPT
<b>Liquid:</b>	
Pumped liquid:	Water
Liquid temperature range:	32 .. 140 °F
Liquid temperature during operation:	68 °F
Density:	62.29 lb/ft <sup>3</sup>
<b>Electrical data:</b>	
Power (P2) main pump:	2 HP
Main frequency:	60 Hz
Rated voltage:	3 x 460-480 V
Starting main:	electronically
Rated current of system:	5.8 A
<b>Controls:</b>	
Control type:	E
Operation unit:	CU323-2
<b>Tank:</b>	
Diaphragm tank:	No
<b>Others:</b>	
Net weight:	217 lb
Gross weight:	333 lb
Product range:	NAMREG
Custom tariff no.:	8413.70.2040

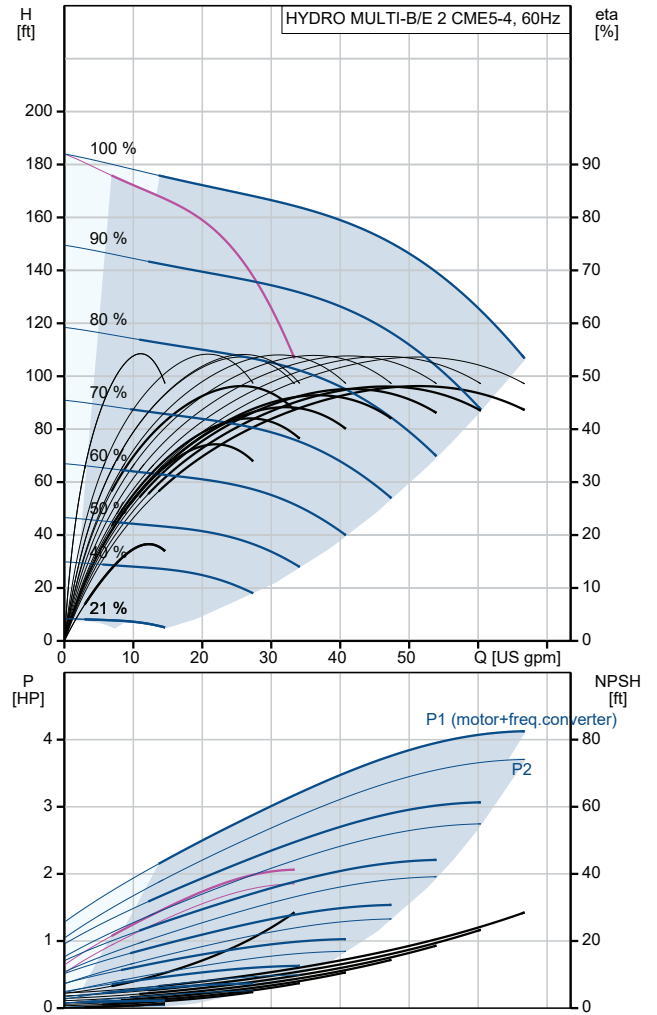




# 91149123 HYDRO MULTI-B/E 2 CME5-4 60 Hz

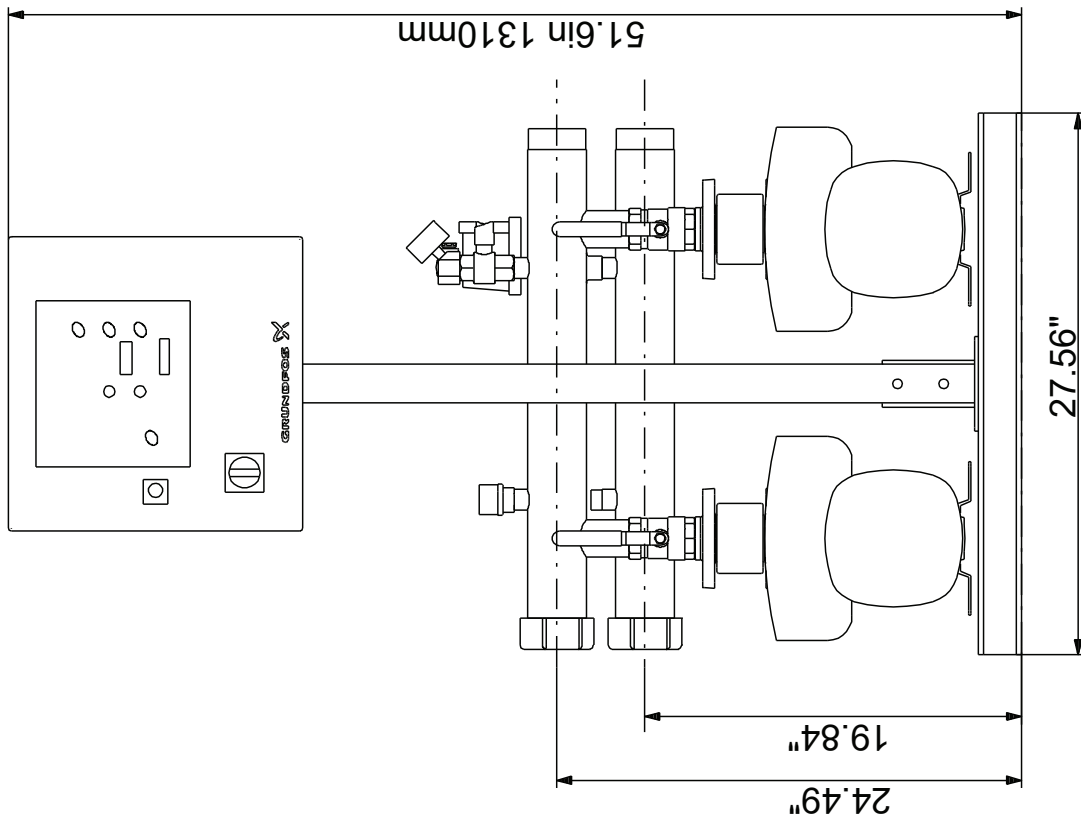
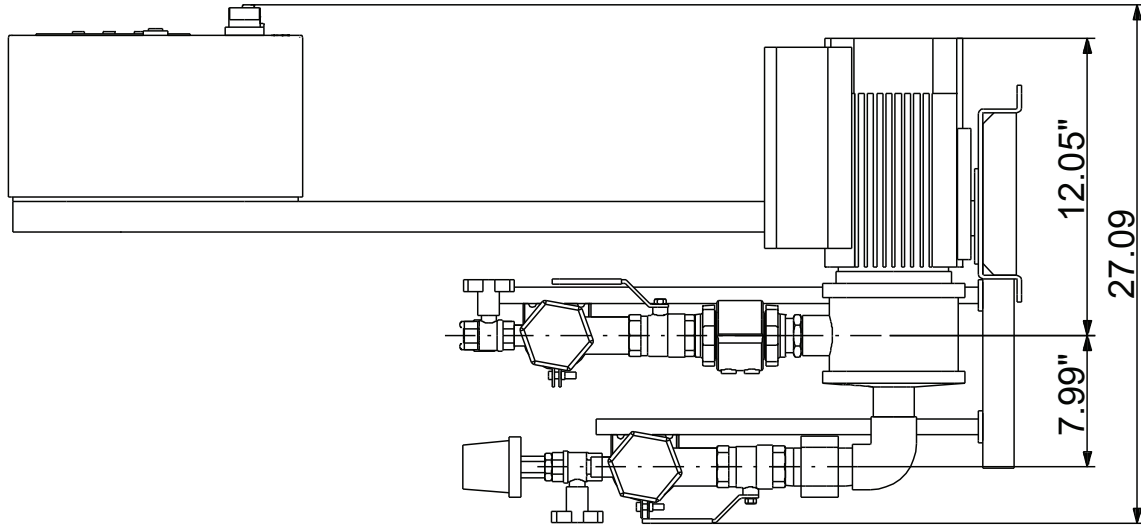


# 91149124 HYDRO MULTI-B/E 2 CME5-5 60 Hz

Description	Value
<b>General information:</b>	
Product name:	HYDRO MULTI-B/E 2 CME5-5
Product No.:	91149124
EAN:	5711490041354
<b>Technical:</b>	
Rated flow:	49.3 US gpm
Min flow system:	7.04 US gpm
Rated head:	182.4 ft
Head max:	219.2 ft
Main pump name:	CME5-5
Main pump Number:	98399402
Number of pumps:	2
Model:	A
<b>Materials:</b>	
Pump:	EN-GJL-200
Manifolds:	EN/DIN 1.4571/ AISI 316 TI
<b>Installation:</b>	
Maximum operating pressure:	145 psi
Pipe connection:	2NPT
<b>Liquid:</b>	
Pumped liquid:	Water
Liquid temperature range:	32 .. 140 °F
Liquid temperature during operation:	68 °F
Density:	62.29 lb/ft <sup>3</sup>
<b>Electrical data:</b>	
Power (P2) main pump:	2 HP
Main frequency:	60 Hz
Rated voltage:	3 x 460-480 V
Starting main:	electronically
Rated current of system:	5.8 A
<b>Controls:</b>	
Control type:	E
Operation unit:	CU323-2
<b>Tank:</b>	
Diaphragm tank:	No
<b>Others:</b>	
Net weight:	219 lb
Gross weight:	335 lb
Product range:	NAMREG
Custom tariff no.:	8413.70.2040

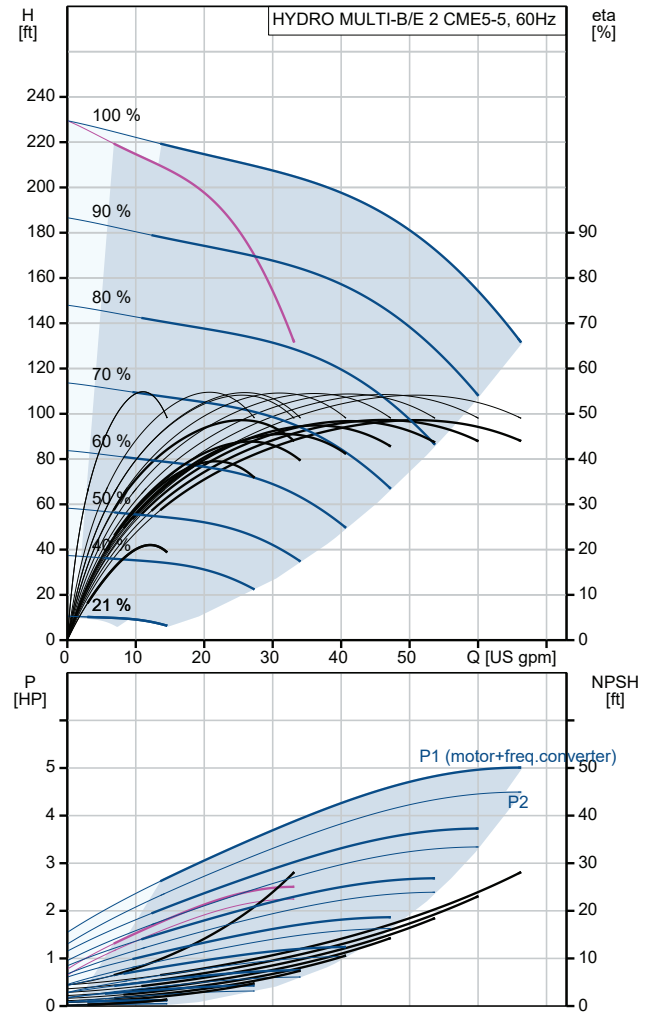


## 91149124 HYDRO MULTI-B/E 2 CME5-5 60 Hz

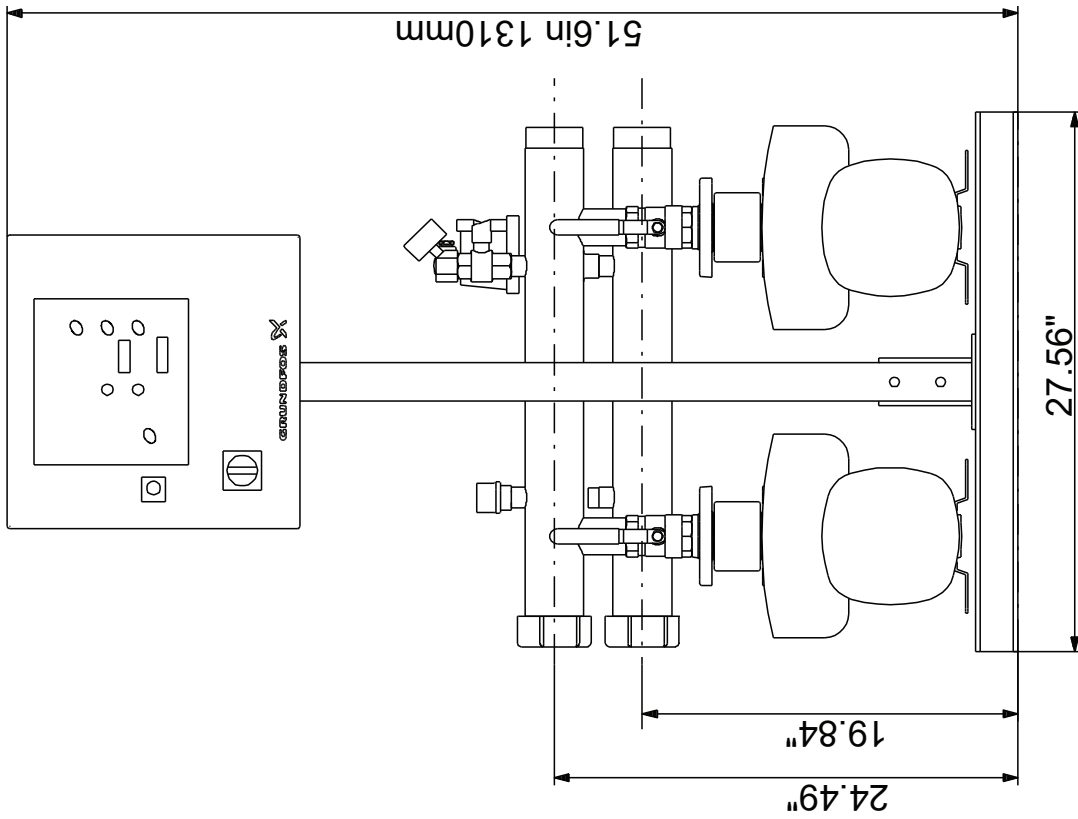
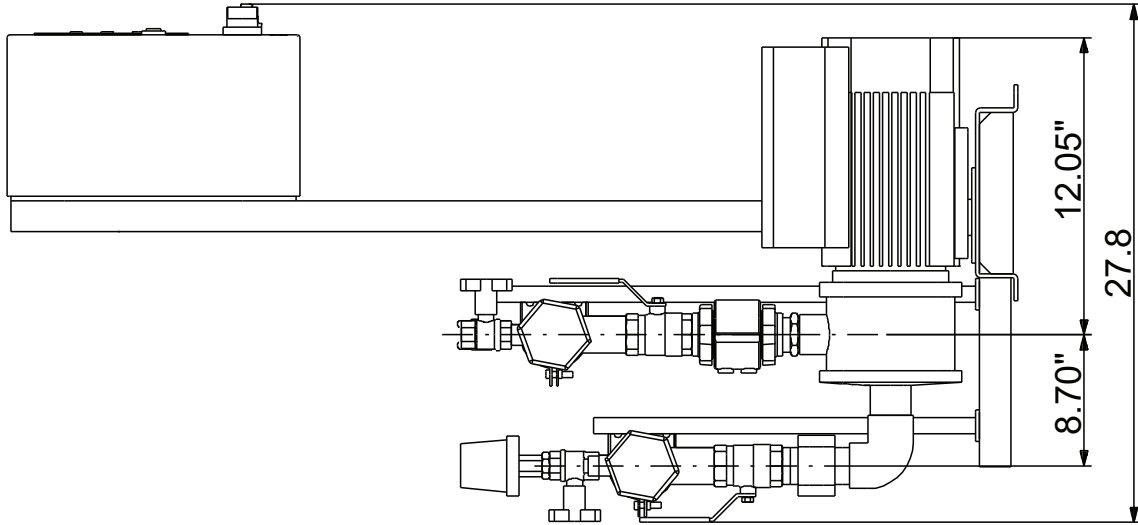


# 91149109 HYDRO MULTI-B/E 2 CME10-1 60 Hz

Description	Value
<b>General information:</b>	
Product name:	HYDRO MULTI-B/E 2 CME10-1
Product No.:	91149109
EAN:	5711490041200
<b>Technical:</b>	
Rated flow:	106 US gpm
Min flow system:	15.9 US gpm
Rated head:	64.64 ft
Head max:	77.43 ft
Main pump name:	CME10-1
Main pump Number:	98395030
Number of pumps:	2
Model:	A
<b>Materials:</b>	
Pump:	EN-GJL-200
Manifolds:	EN/DIN 1.4571/ AISI 316 TI
<b>Installation:</b>	
Maximum operating pressure:	145 psi
Pipe connection:	2.5NPT
<b>Liquid:</b>	
Pumped liquid:	Water
Liquid temperature range:	32 .. 140 °F
Liquid temperature during operation:	68 °F
Density:	62.29 lb/ft <sup>3</sup>
<b>Electrical data:</b>	
Power (P2) main pump:	1.5 HP
Main frequency:	60 Hz
Rated voltage:	1 x 200-240 V
Starting main:	electronically
Rated current of system:	13.1 A
<b>Controls:</b>	
Control type:	E
Operation unit:	CU323-2
<b>Tank:</b>	
Diaphragm tank:	No
<b>Others:</b>	
Net weight:	255 lb
Gross weight:	370 lb
Product range:	NAMREG
Custom tariff no.:	8413.70.2040

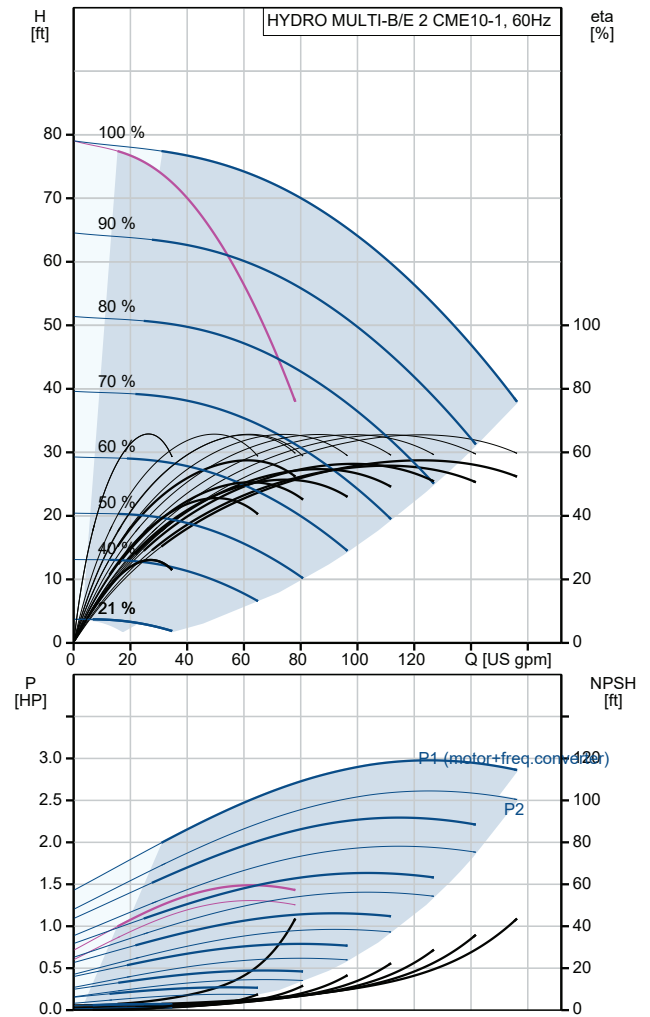


# 91149109 HYDRO MULTI-B/E 2 CME10-1 60 Hz

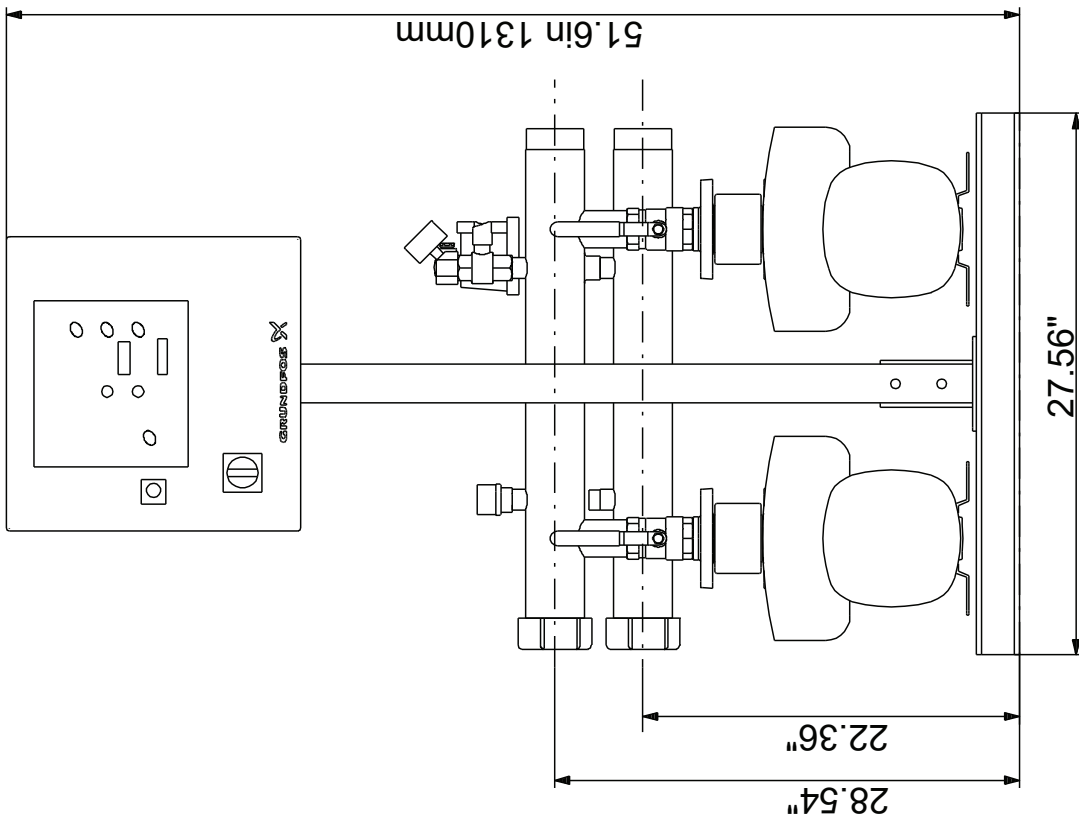
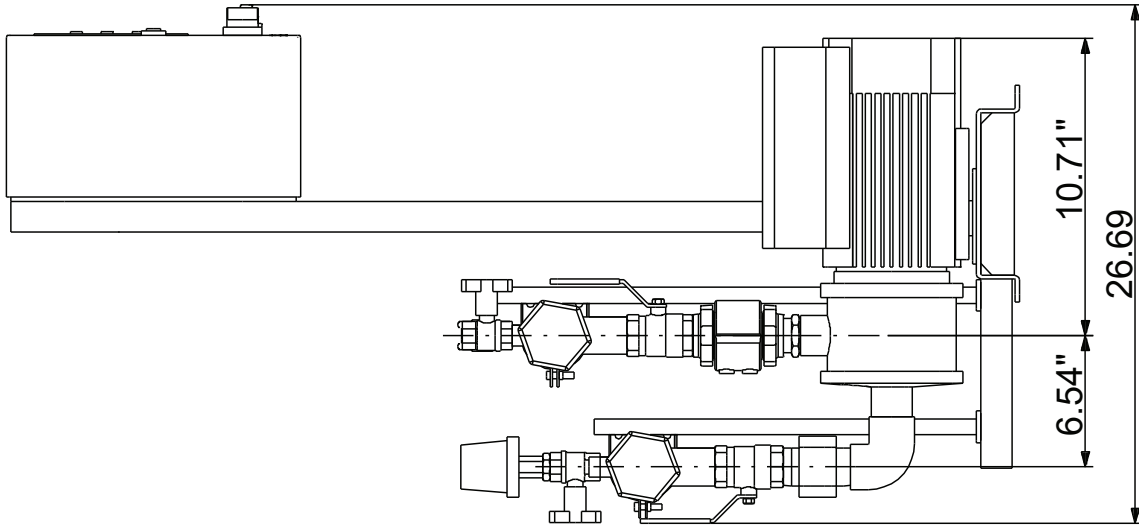


# 91149113 HYDRO MULTI-B/E 2 CME10-2 60 Hz

Description	Value
<b>General information:</b>	
Product name:	HYDRO MULTI-B/E 2 CME10-2
Product No.:	91149113
EAN:	5711490038644
<b>Technical:</b>	
Rated flow:	106 US gpm
Min flow system:	15.9 US gpm
Rated head:	128 ft
Head max:	150.9 ft
Main pump name:	CME10-2
Main pump Number:	98126308
Number of pumps:	2
Model:	A
<b>Materials:</b>	
Pump:	EN-GJL-200
Manifolds:	EN/DIN 1.4571/ AISI 316 TI
<b>Installation:</b>	
Maximum operating pressure:	145 psi
Pipe connection:	2.5NPT
<b>Liquid:</b>	
Pumped liquid:	Water
Liquid temperature range:	32 .. 140 °F
Liquid temperature during operation:	68 °F
Density:	62.29 lb/ft³
<b>Electrical data:</b>	
Power (P2) main pump:	3 HP
Main frequency:	60 Hz
Rated voltage:	3 x 208-230 V
Starting main:	electronically
Rated current of system:	16.6 A
<b>Controls:</b>	
Control type:	E
Operation unit:	CU323-2
<b>Tank:</b>	
Diaphragm tank:	No
<b>Others:</b>	
Net weight:	342 lb
Gross weight:	564 lb
Product range:	NAMREG
Custom tariff no.:	8413.70.2040

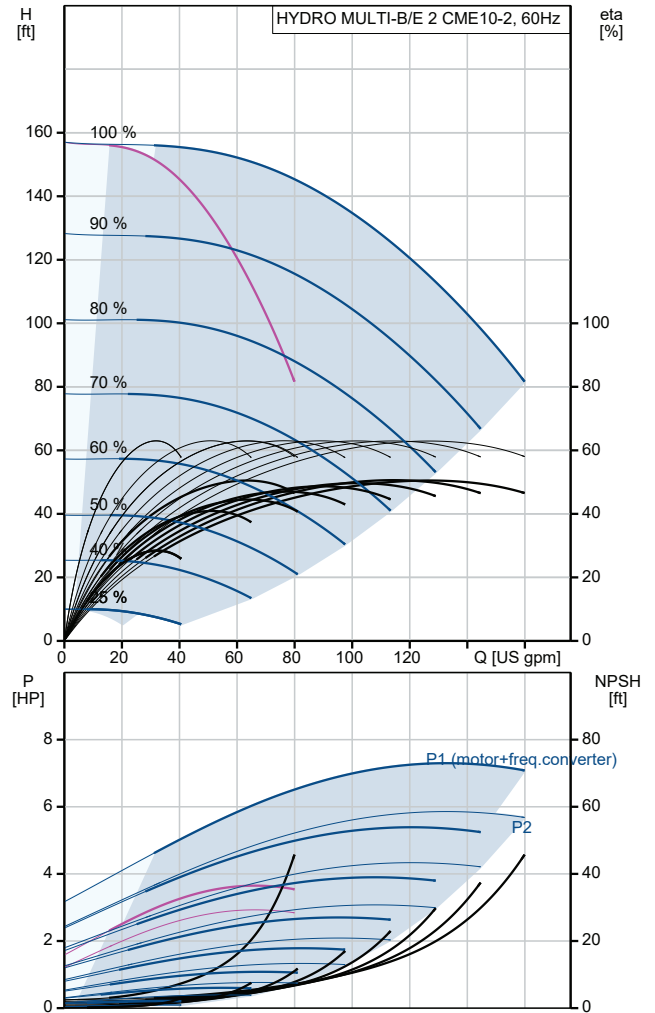


# 91149113 HYDRO MULTI-B/E 2 CME10-2 60 Hz

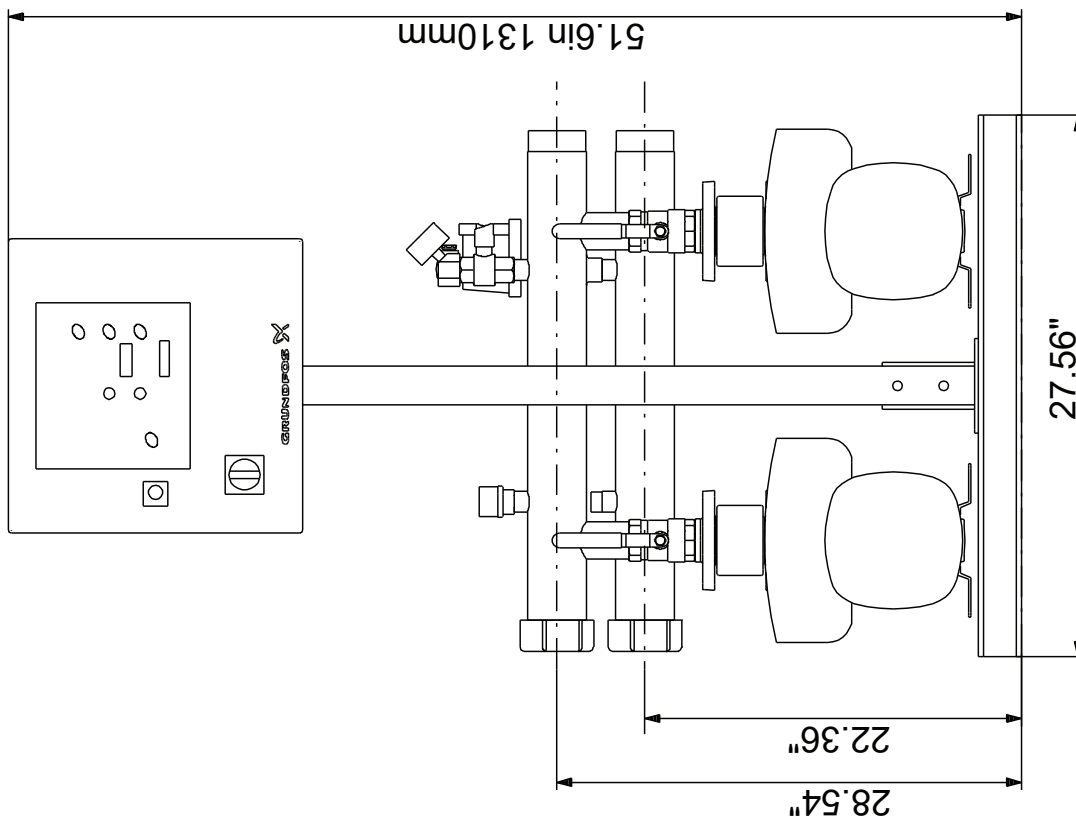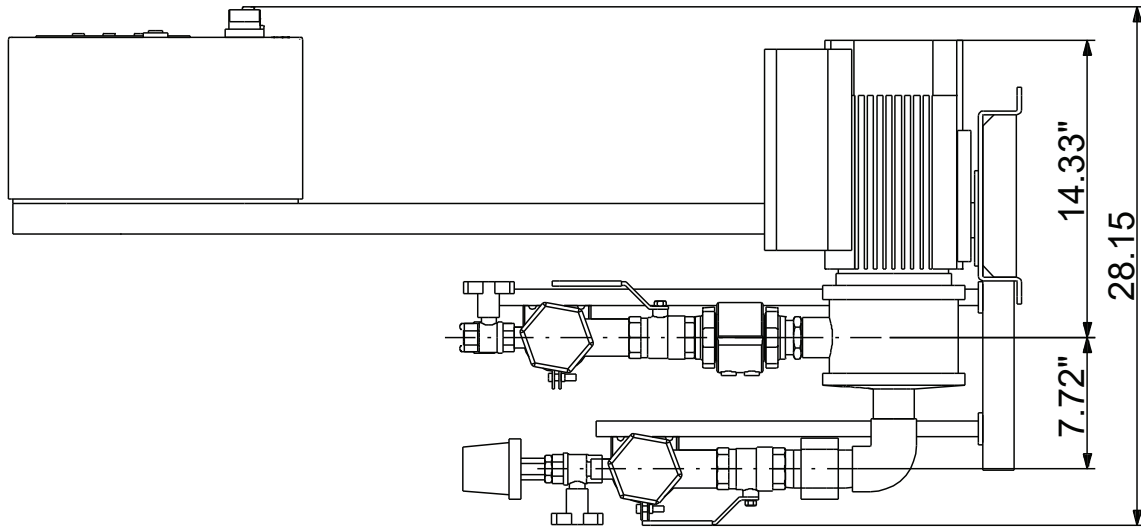



# 91149127 HYDRO MULTI-B/E 2 CME10-2 60 Hz

Description	Value
<b>General information:</b>	
Product name:	HYDRO MULTI-B/E 2 CME10-2
Product No.:	91149127
EAN:	5711490041378
<b>Technical:</b>	
Rated flow:	106 US gpm
Min flow system:	15.9 US gpm
Rated head:	128 ft
Head max:	150.9 ft
Main pump name:	CME10-2
Main pump Number:	98396737
Number of pumps:	2
Model:	A
<b>Materials:</b>	
Pump:	EN-GJL-200
Manifolds:	EN/DIN 1.4571/ AISI 316 TI
<b>Installation:</b>	
Maximum operating pressure:	145 psi
Pipe connection:	2.5NPT
<b>Liquid:</b>	
Pumped liquid:	Water
Liquid temperature range:	32 .. 140 °F
Liquid temperature during operation:	68 °F
Density:	62.29 lb/ft³
<b>Electrical data:</b>	
Power (P2) main pump:	3 HP
Main frequency:	60 Hz
Rated voltage:	3 x 460-480 V
Starting main:	electronically
Rated current of system:	8.5 A
<b>Controls:</b>	
Control type:	E
Operation unit:	CU323-2
<b>Tank:</b>	
Diaphragm tank:	No
<b>Others:</b>	
Net weight:	280 lb
Gross weight:	503 lb
Product range:	NAMREG
Custom tariff no.:	8413.70.2040

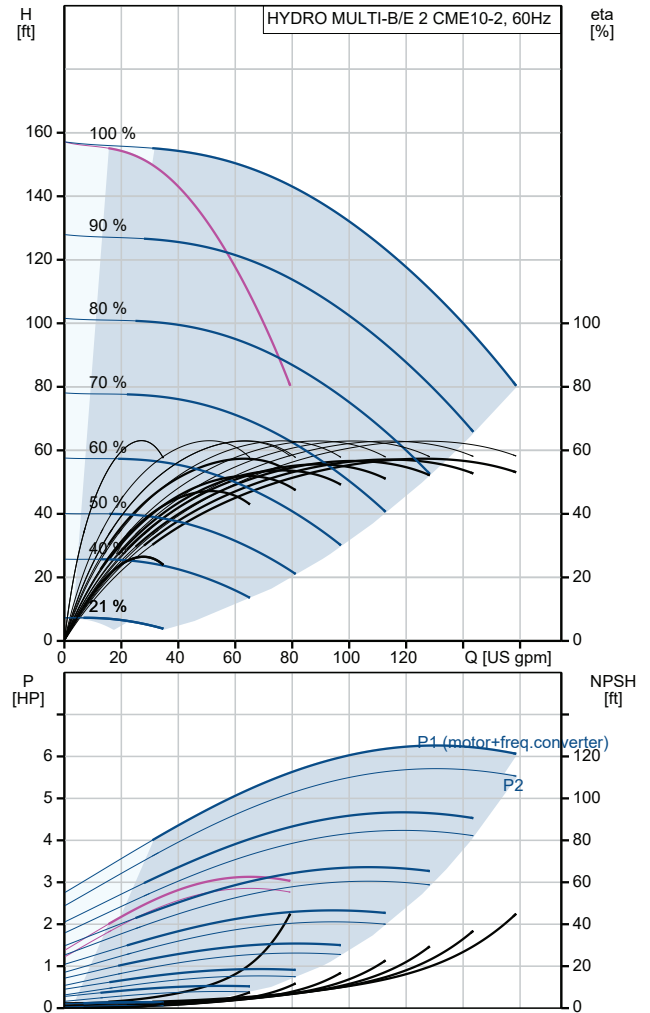




# 91149127 HYDRO MULTI-B/E 2 CME10-2 60 Hz

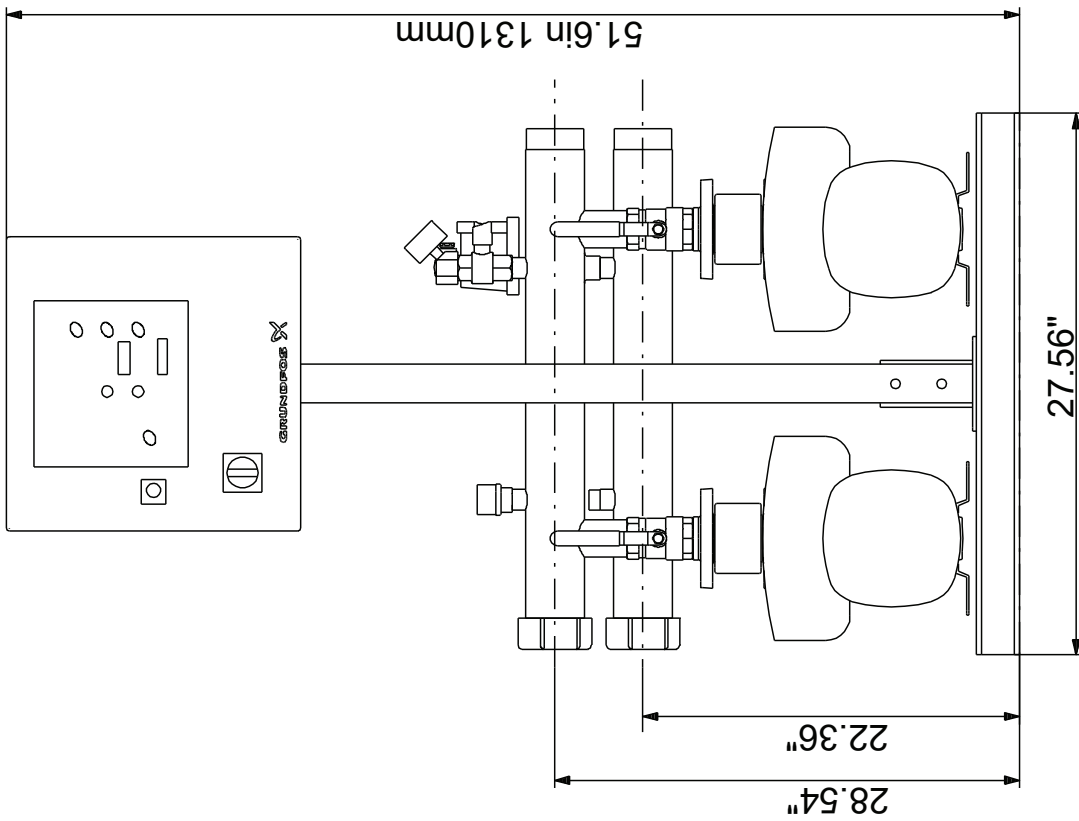
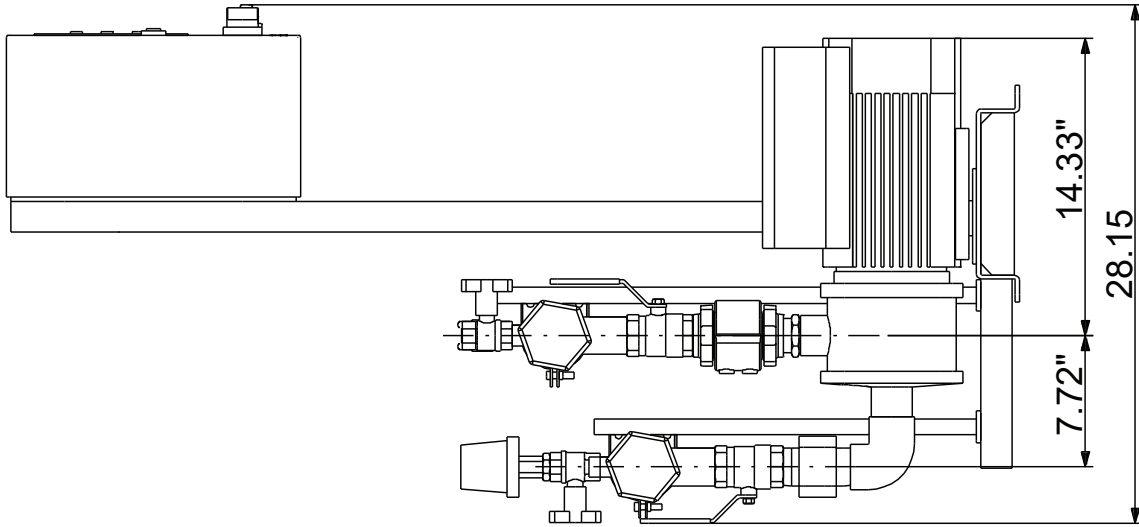


# 91149114 HYDRO MULTI-B/E 2 CME10-3 60 Hz

Description	Value
<b>General information:</b>	
Product name:	HYDRO MULTI-B/E 2 CME10-3
Product No.:	91149114
EAN:	5711490038651
<b>Technical:</b>	
Rated flow:	106 US gpm
Min flow system:	15.9 US gpm
Rated head:	191.3 ft
Head max:	224.7 ft
Main pump name:	CME10-3
Main pump Number:	98126058
Number of pumps:	2
Model:	A
<b>Materials:</b>	
Pump:	EN-GJL-200
Manifolds:	EN/DIN 1.4571/ AISI 316 TI
<b>Installation:</b>	
Maximum operating pressure:	145 psi
Pipe connection:	2.5NPT
<b>Liquid:</b>	
Pumped liquid:	Water
Liquid temperature range:	32 .. 140 °F
Liquid temperature during operation:	68 °F
Density:	62.29 lb/ft³
<b>Electrical data:</b>	
Power (P2) main pump:	5 HP
Main frequency:	60 Hz
Rated voltage:	3 x 208-230 V
Starting main:	electronically
Rated current of system:	26.8 A
<b>Controls:</b>	
Control type:	E
Operation unit:	CU323-2
<b>Tank:</b>	
Diaphragm tank:	No
<b>Others:</b>	
Net weight:	423 lb
Gross weight:	646 lb
Product range:	NAMREG
Country of origin:	US
Custom tariff no.:	8413.70.2040

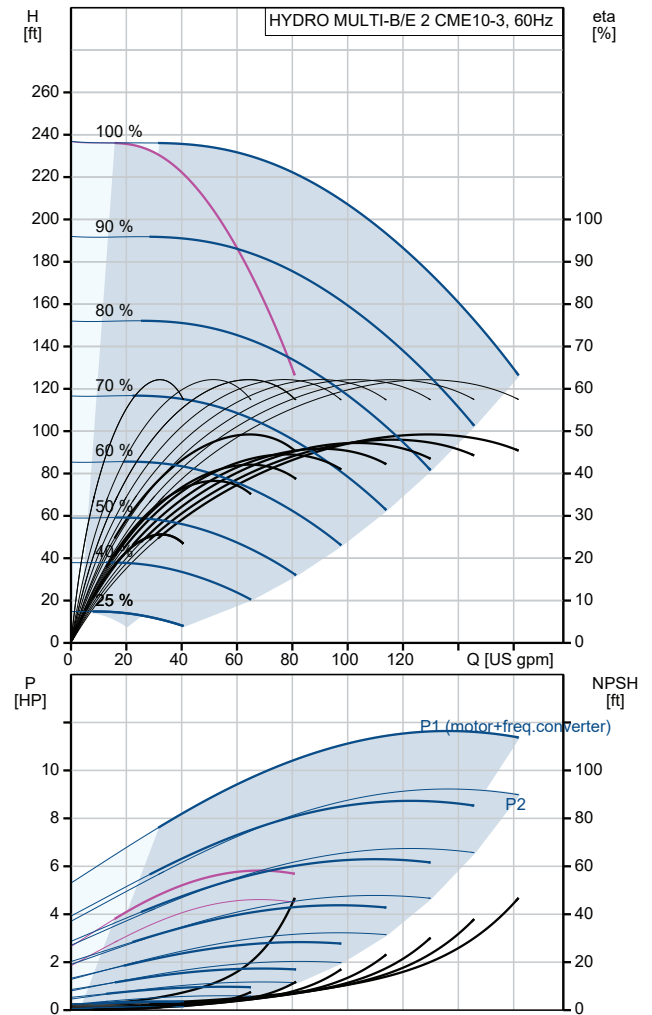


# 91149114 HYDRO MULTI-B/E 2 CME10-3 60 Hz

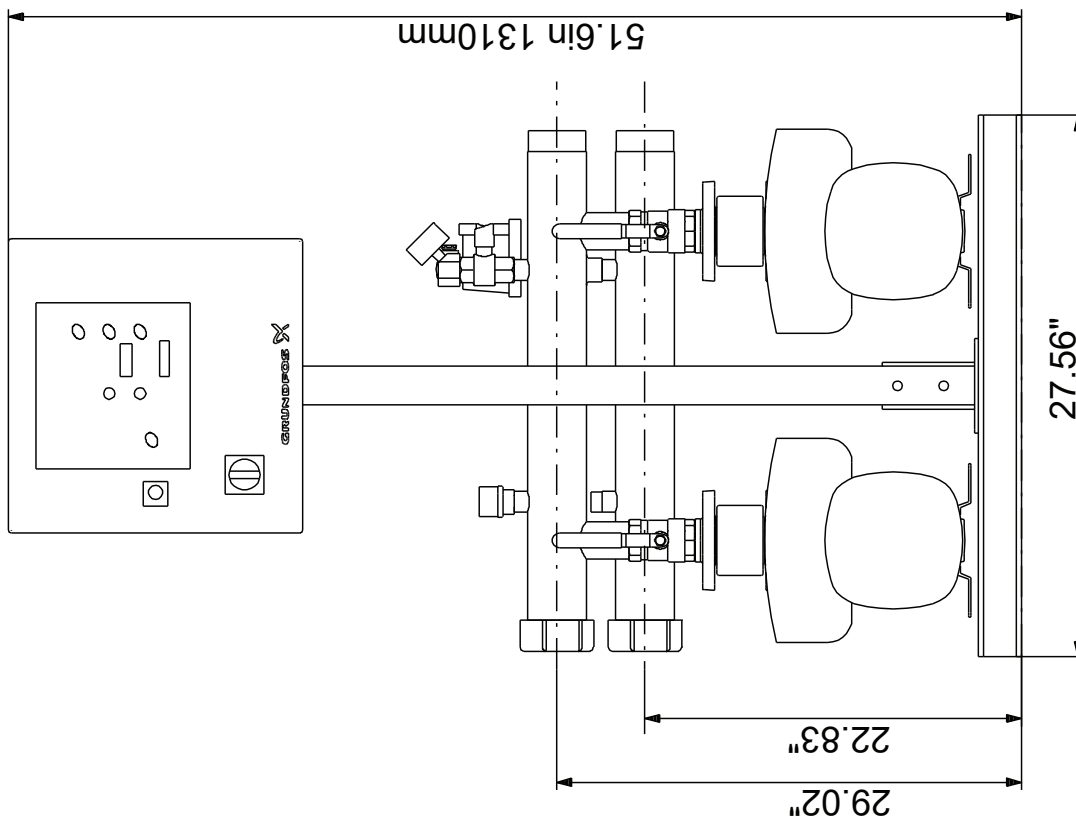
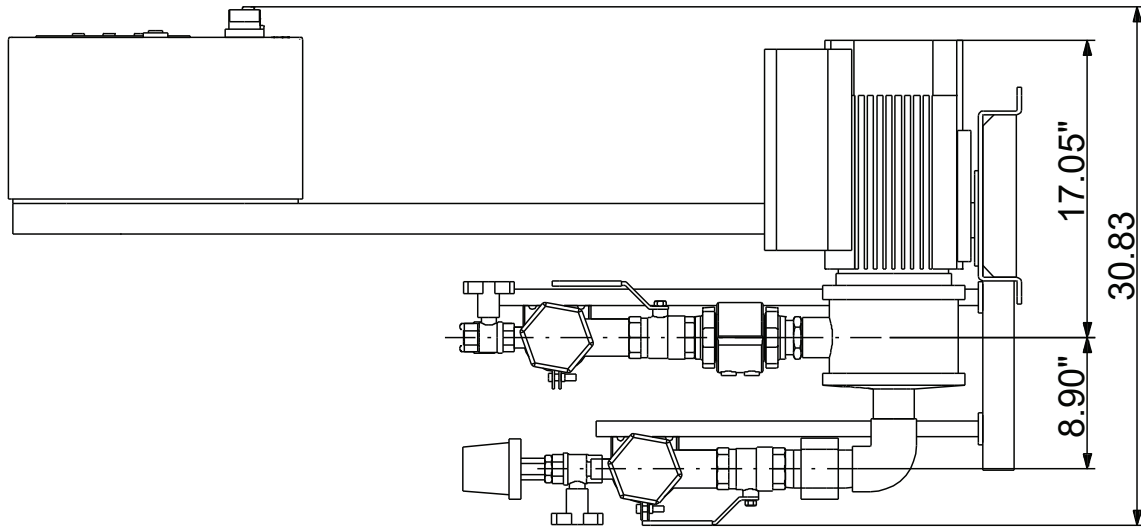


# 91149128 HYDRO MULTI-B/E 2 CME10-3 60 Hz

Description	Value
<b>General information:</b>	
Product name:	HYDRO MULTI-B/E 2 CME10-3
Product No.:	91149128
EAN:	5711490038798
<b>Technical:</b>	
Rated flow:	106 US gpm
Min flow system:	15.9 US gpm
Rated head:	191.3 ft
Head max:	224.7 ft
Main pump name:	CME10-3
Main pump Number:	99077769
Number of pumps:	2
Model:	A
<b>Materials:</b>	
Pump:	EN-GJL-200
Manifolds:	EN/DIN 1.4571/ AISI 316 TI
<b>Installation:</b>	
Maximum operating pressure:	145 psi
Pipe connection:	2.5NPT
<b>Liquid:</b>	
Pumped liquid:	Water
Liquid temperature range:	32 .. 140 °F
Liquid temperature during operation:	68 °F
Density:	62.29 lb/ft³
<b>Electrical data:</b>	
Power (P2) main pump:	5 HP
Main frequency:	60 Hz
Rated voltage:	3 x 460-480 V
Starting main:	electronically
Rated current of system:	12.2 A
<b>Controls:</b>	
Control type:	E
Operation unit:	CU323-2
<b>Tank:</b>	
Diaphragm tank:	No
<b>Others:</b>	
Net weight:	405 lb
Gross weight:	628 lb
Product range:	NAMREG
Custom tariff no.:	8413.70.2040

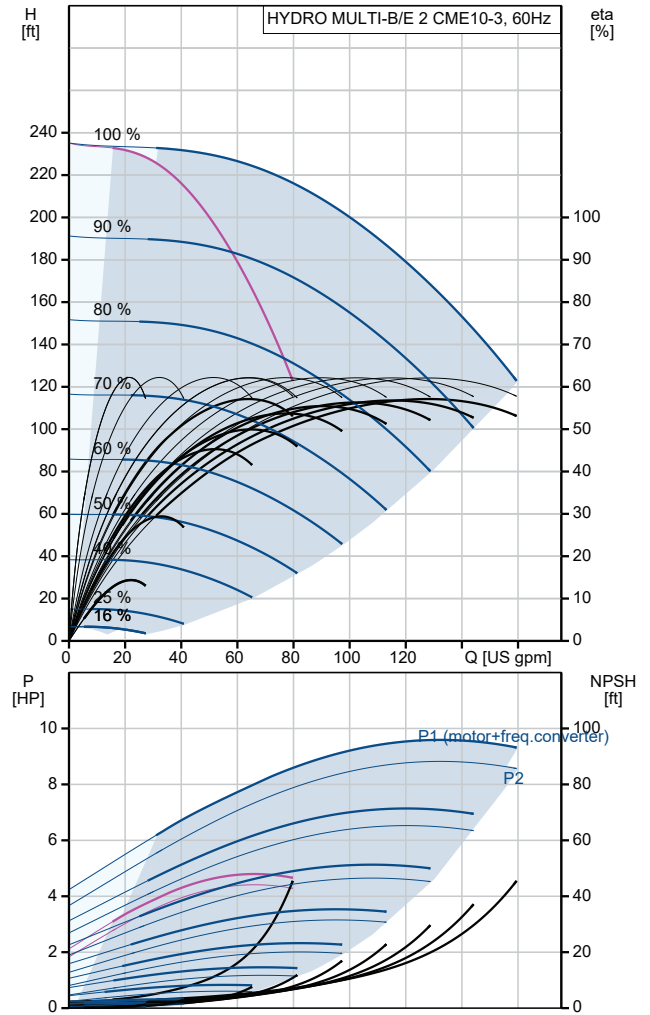


# 91149128 HYDRO MULTI-B/E 2 CME10-3 60 Hz

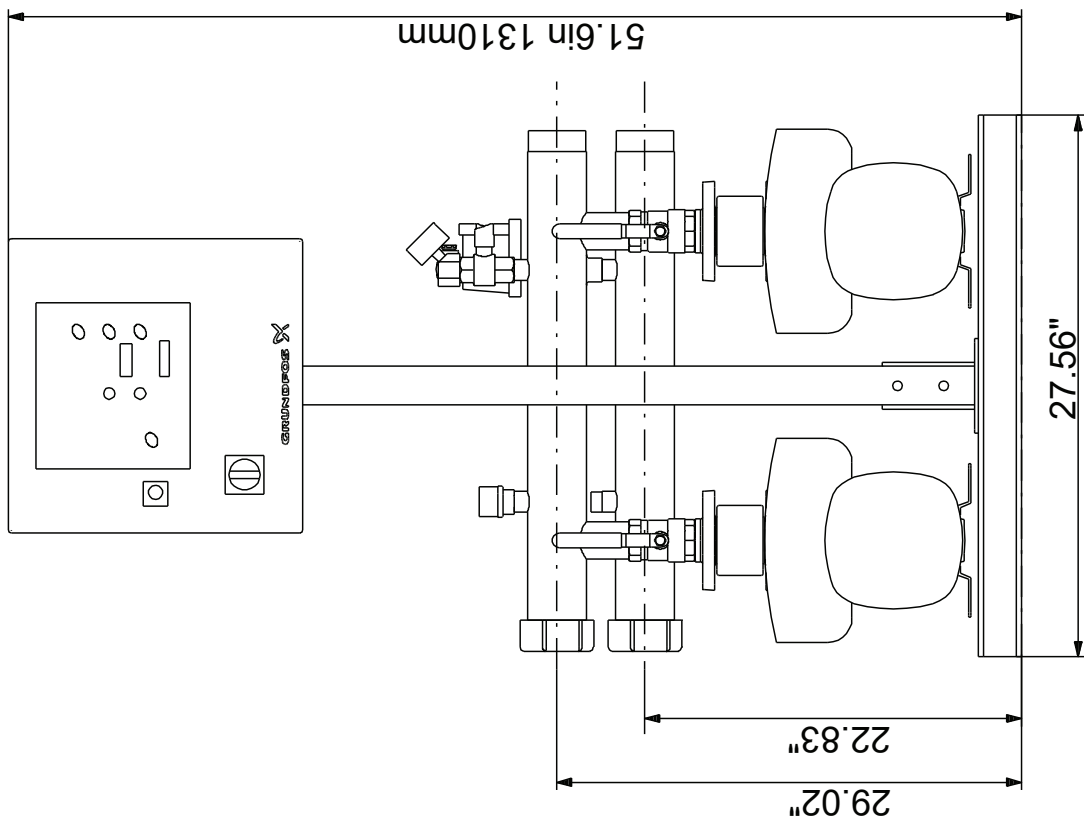
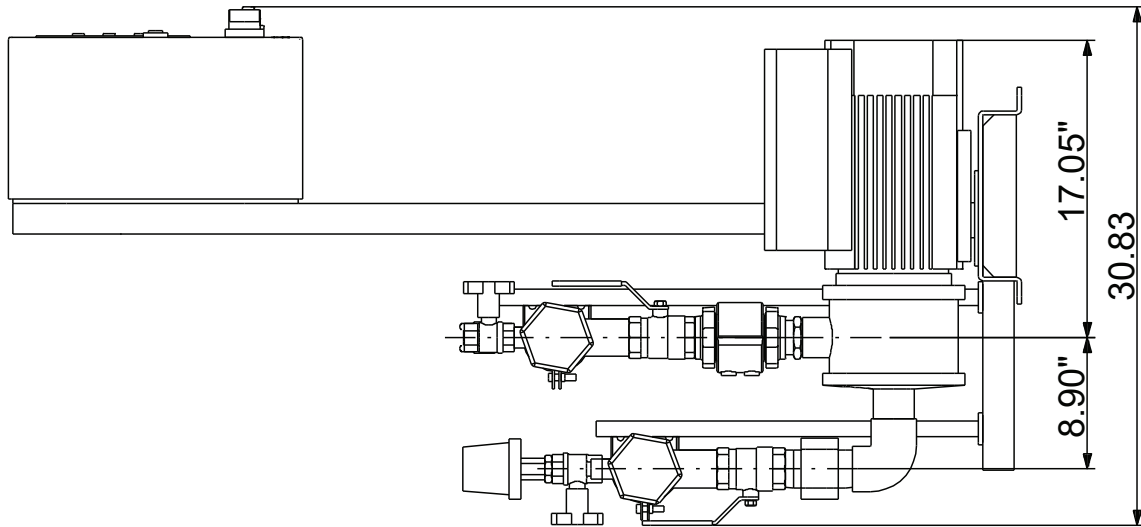


# 91149117 HYDRO MULTI-B/E 2 CME15-1 60 Hz

Description	Value
<b>General information:</b>	
Product name:	HYDRO MULTI-B/E 2 CME15-1
Product No.:	91149117
EAN:	5711490038682
<b>Technical:</b>	
Rated flow:	180 US gpm
Min flow system:	26.4 US gpm
Rated head:	69.56 ft
Head max:	83.99 ft
Main pump name:	CME15-1
Main pump Number:	98126320
Number of pumps:	2
Model:	A
<b>Materials:</b>	
Pump:	EN-GJL-200
Manifolds:	EN/DIN 1.4571/ AISI 316 TI
<b>Installation:</b>	
Maximum operating pressure:	145 psi
Pipe connection:	3ANSI
<b>Liquid:</b>	
Pumped liquid:	Water
Liquid temperature range:	32 .. 140 °F
Liquid temperature during operation:	68 °F
Density:	62.29 lb/ft <sup>3</sup>
<b>Electrical data:</b>	
Power (P2) main pump:	3 HP
Main frequency:	60 Hz
Rated voltage:	3 x 208-230 V
Starting main:	electronically
Rated current of system:	16.6 A
<b>Controls:</b>	
Control type:	E
Operation unit:	CU323-2
<b>Tank:</b>	
Diaphragm tank:	No
<b>Others:</b>	
Net weight:	377 lb
Gross weight:	600 lb
Product range:	NAMREG
Custom tariff no.:	8413.70.2040

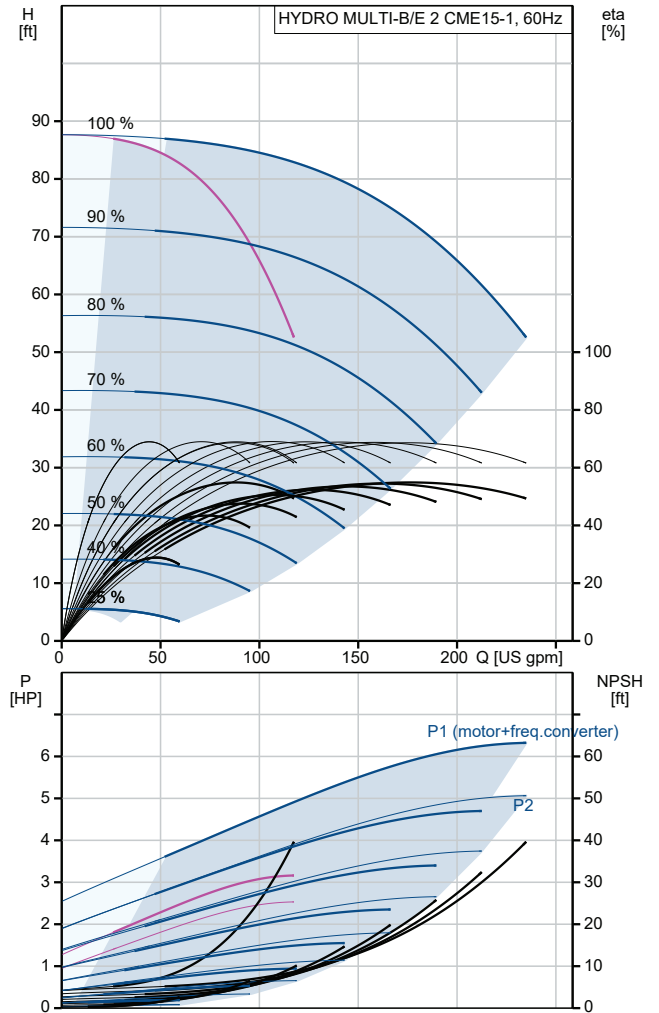


# 91149117 HYDRO MULTI-B/E 2 CME15-1 60 Hz

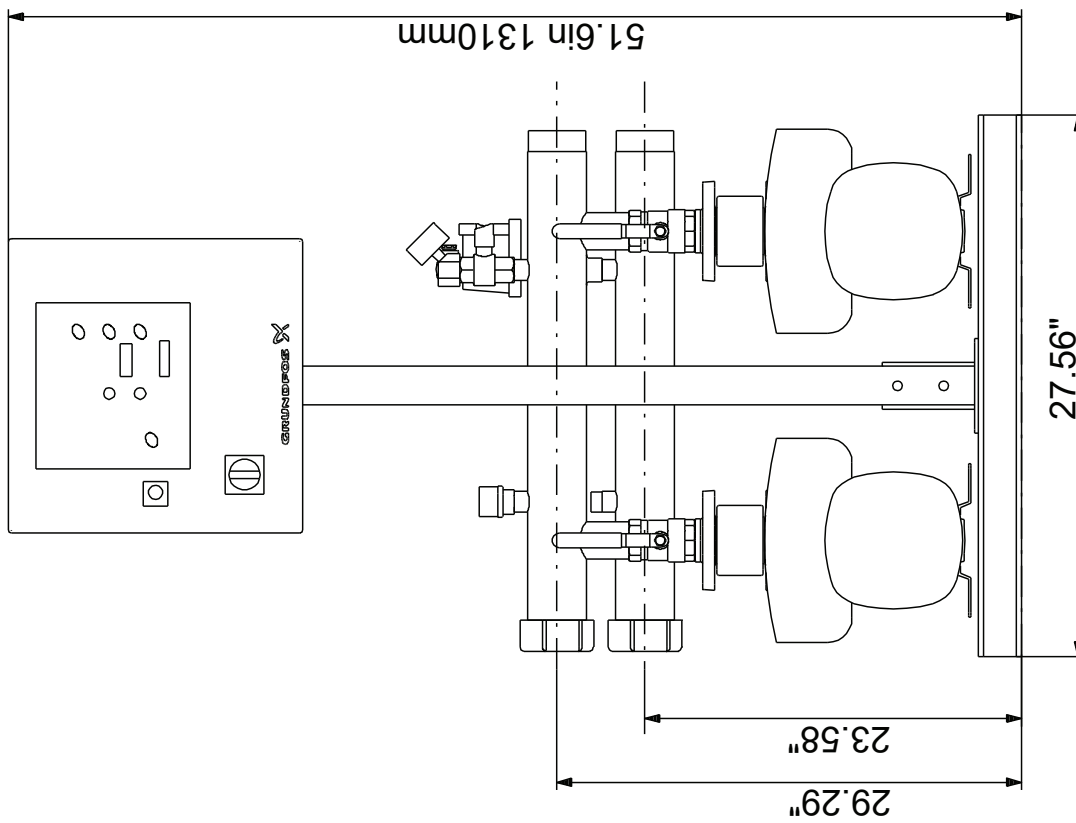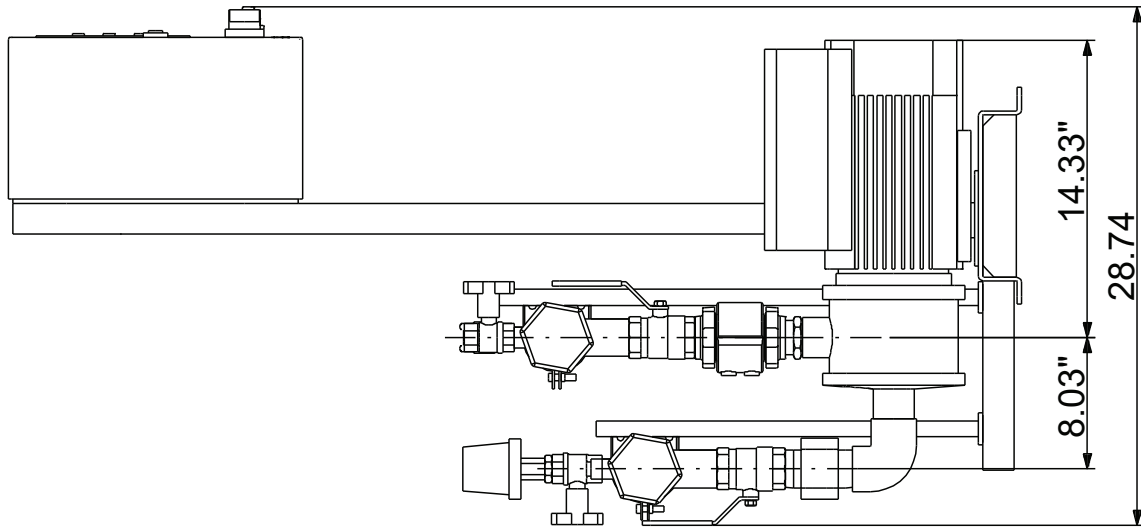



# 91149131 HYDRO MULTI-B/E 2 CME15-1 60 Hz

Description	Value
<b>General information:</b>	
Product name:	HYDRO MULTI-B/E 2 CME15-1
Product No.:	91149131
EAN:	5711490041385
<b>Technical:</b>	
Rated flow:	180 US gpm
Min flow system:	26.4 US gpm
Rated head:	69.56 ft
Head max:	83.99 ft
Main pump name:	CME15-1
Main pump Number:	98396746
Number of pumps:	2
Model:	A
<b>Materials:</b>	
Pump:	EN-GJL-200
Manifolds:	EN/DIN 1.4571/ AISI 316 TI
<b>Installation:</b>	
Maximum operating pressure:	145 psi
Pipe connection:	3ANSI
<b>Liquid:</b>	
Pumped liquid:	Water
Liquid temperature range:	32 .. 140 °F
Liquid temperature during operation:	68 °F
Density:	62.29 lb/ft³
<b>Electrical data:</b>	
Power (P2) main pump:	3 HP
Main frequency:	60 Hz
Rated voltage:	3 x 460-480 V
Starting main:	electronically
Rated current of system:	8.5 A
<b>Controls:</b>	
Control type:	E
Operation unit:	CU323-2
<b>Tank:</b>	
Diaphragm tank:	No
<b>Others:</b>	
Net weight:	318 lb
Gross weight:	540 lb
Product range:	NAMREG
Custom tariff no.:	8413.70.2040

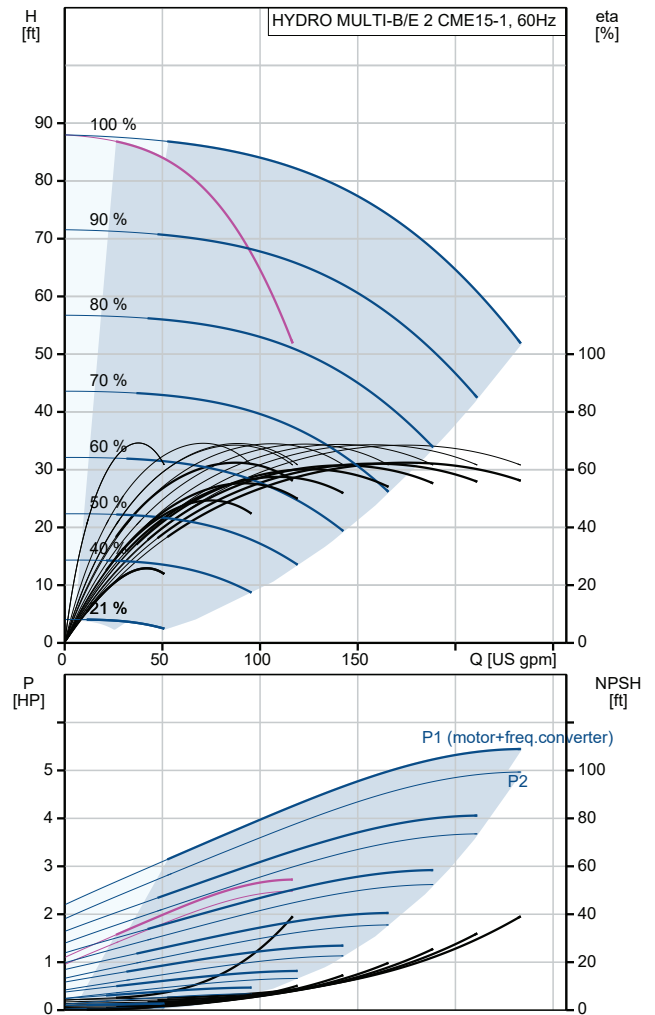




# 91149131 HYDRO MULTI-B/E 2 CME15-1 60 Hz

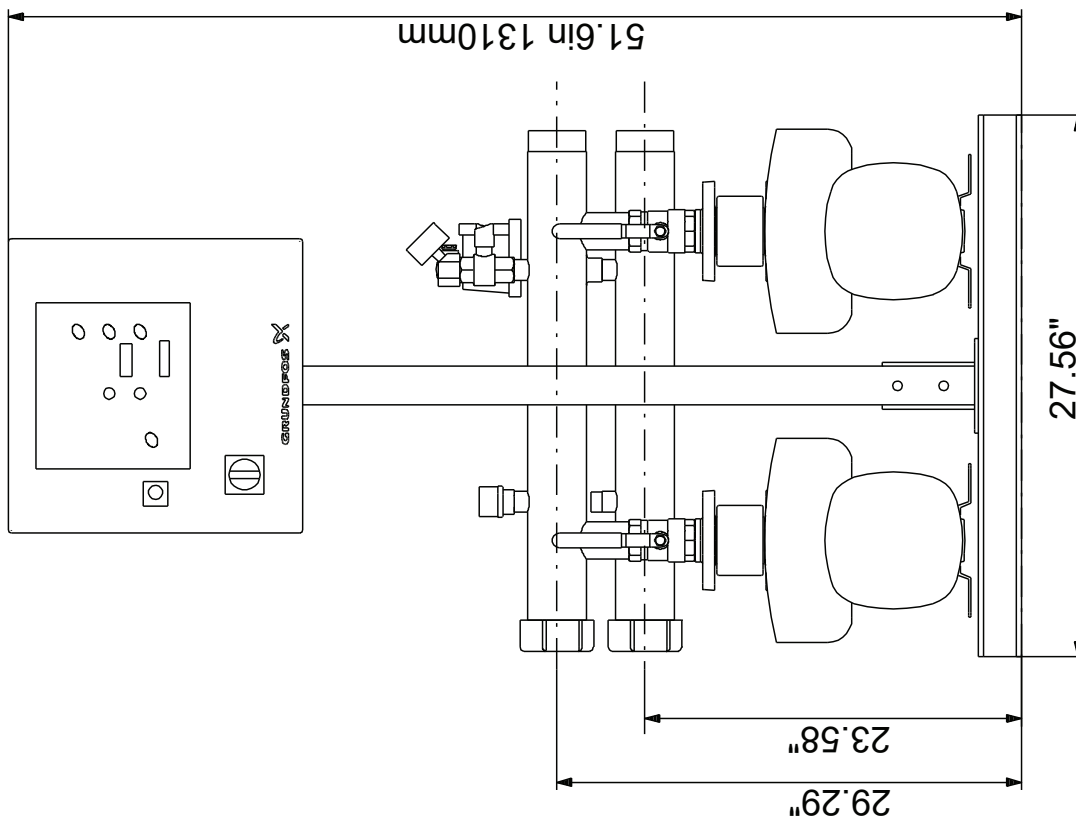
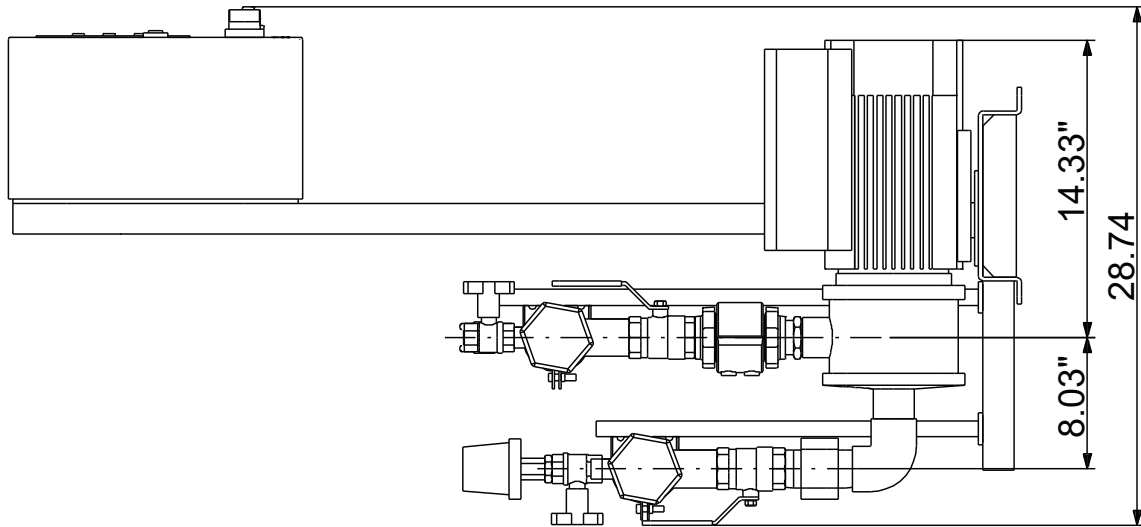


# 91149118 HYDRO MULTI-B/E 2 CME15-2 60 Hz

Description	Value
<b>General information:</b>	
Product name:	HYDRO MULTI-B/E 2 CME15-2
Product No.:	91149118
EAN:	5711490041293
<b>Technical:</b>	
Rated flow:	180 US gpm
Min flow system:	26.4 US gpm
Rated head:	140.1 ft
Head max:	162.7 ft
Main pump name:	CME15-2
Main pump Number:	98126082
Number of pumps:	2
Model:	A
<b>Materials:</b>	
Pump:	EN-GJL-200
Manifolds:	EN/DIN 1.4571/ AISI 316 TI
<b>Installation:</b>	
Maximum operating pressure:	145 psi
Pipe connection:	3ANSI
<b>Liquid:</b>	
Pumped liquid:	Water
Liquid temperature range:	32 .. 140 °F
Liquid temperature during operation:	68 °F
Density:	62.29 lb/ft³
<b>Electrical data:</b>	
Power (P2) main pump:	5 HP
Main frequency:	60 Hz
Rated voltage:	3 x 208-230 V
Starting main:	electronically
Rated current of system:	26.8 A
<b>Controls:</b>	
Control type:	E
Operation unit:	CU323-2
<b>Tank:</b>	
Diaphragm tank:	No
<b>Others:</b>	
Net weight:	459 lb
Gross weight:	681 lb
Product range:	NAMREG
Country of origin:	US
Custom tariff no.:	8413.70.2040

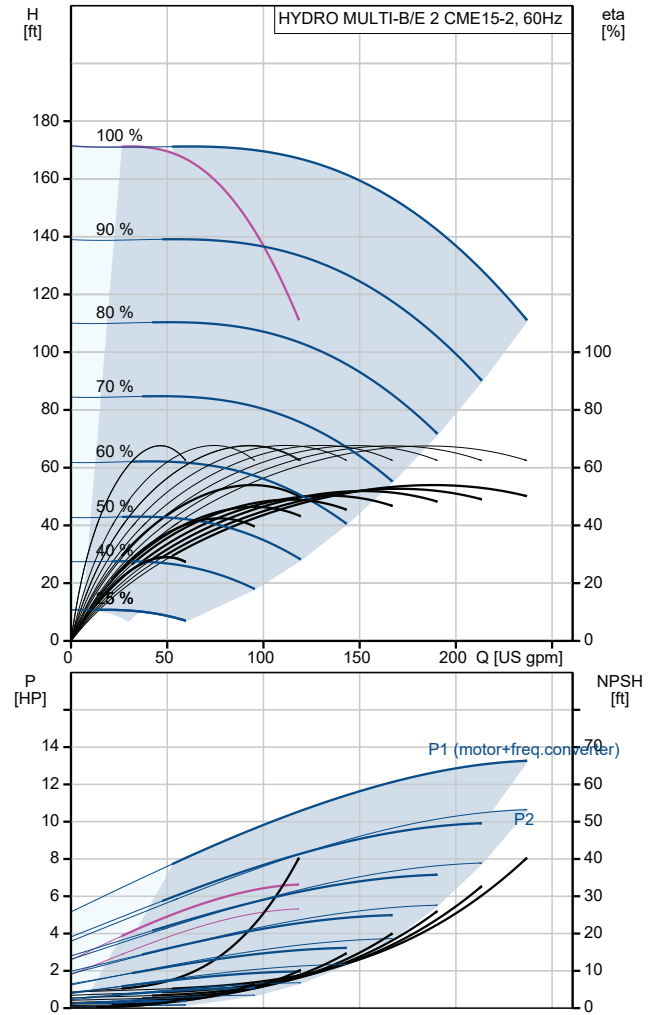


# 91149118 HYDRO MULTI-B/E 2 CME15-2 60 Hz

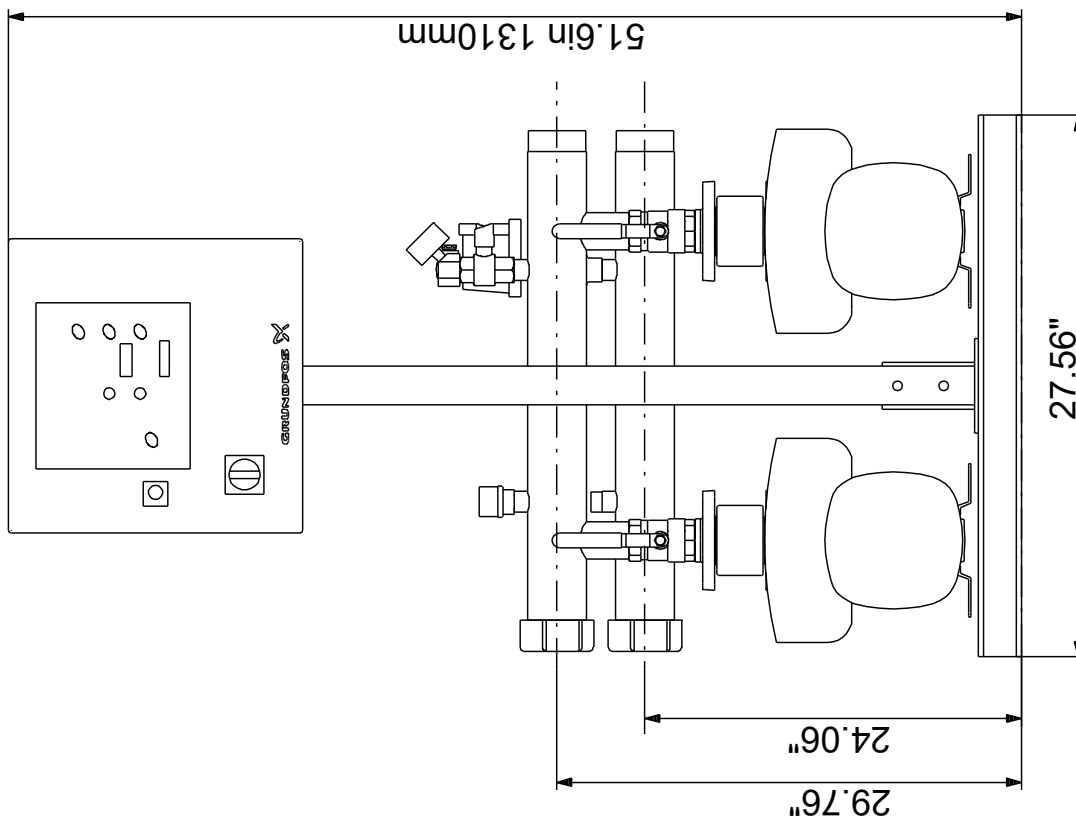
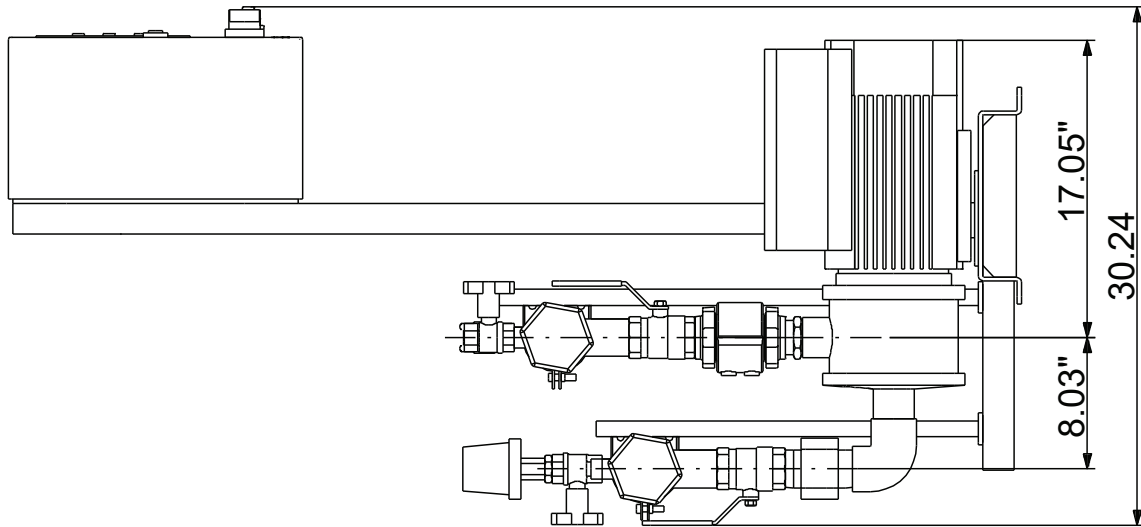


# 91149132 HYDRO MULTI-B/E 2 CME15-2 60 Hz

Description	Value
<b>General information:</b>	
Product name:	HYDRO MULTI-B/E 2 CME15-2
Product No.:	91149132
EAN:	5711490041392
<b>Technical:</b>	
Rated flow:	180 US gpm
Min flow system:	26.4 US gpm
Rated head:	140.1 ft
Head max:	162.7 ft
Main pump name:	CME15-2
Main pump Number:	99077772
Number of pumps:	2
Model:	A
<b>Materials:</b>	
Pump:	EN-GJL-200
Manifolds:	EN/DIN 1.4571/ AISI 316 TI
<b>Installation:</b>	
Maximum operating pressure:	145 psi
Pipe connection:	3ANSI
<b>Liquid:</b>	
Pumped liquid:	Water
Liquid temperature range:	32 .. 140 °F
Liquid temperature during operation:	68 °F
Density:	62.29 lb/ft³
<b>Electrical data:</b>	
Power (P2) main pump:	5 HP
Main frequency:	60 Hz
Rated voltage:	3 x 460-480 V
Starting main:	electronically
Rated current of system:	12.2 A
<b>Controls:</b>	
Control type:	E
Operation unit:	CU323-2
<b>Tank:</b>	
Diaphragm tank:	No
<b>Others:</b>	
Net weight:	441 lb
Gross weight:	664 lb
Product range:	NAMREG
Custom tariff no.:	8413.70.2040

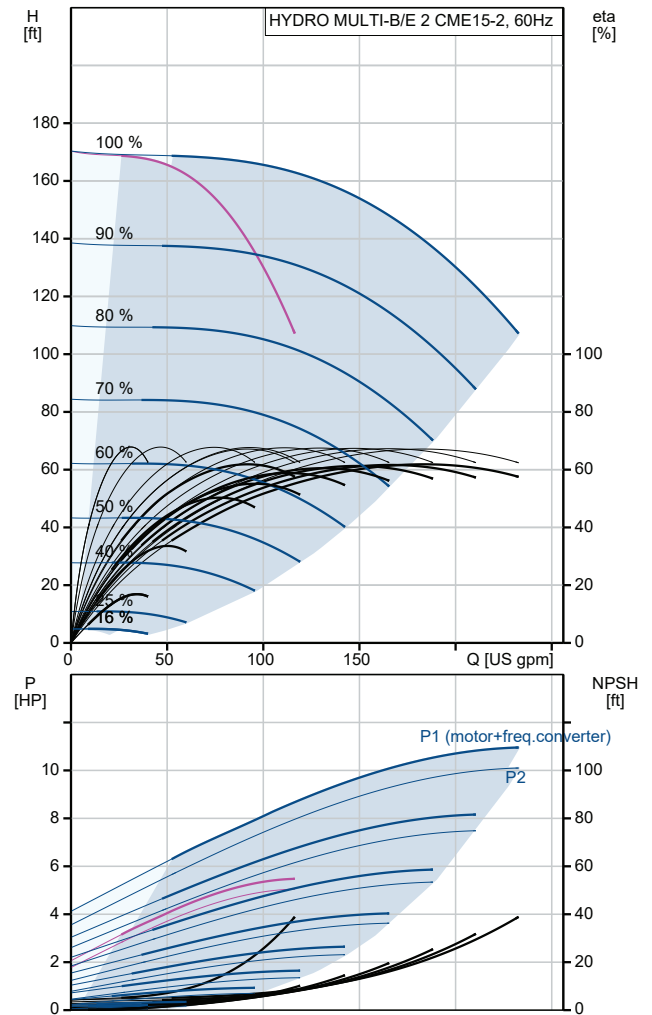


# 91149132 HYDRO MULTI-B/E 2 CME15-2 60 Hz

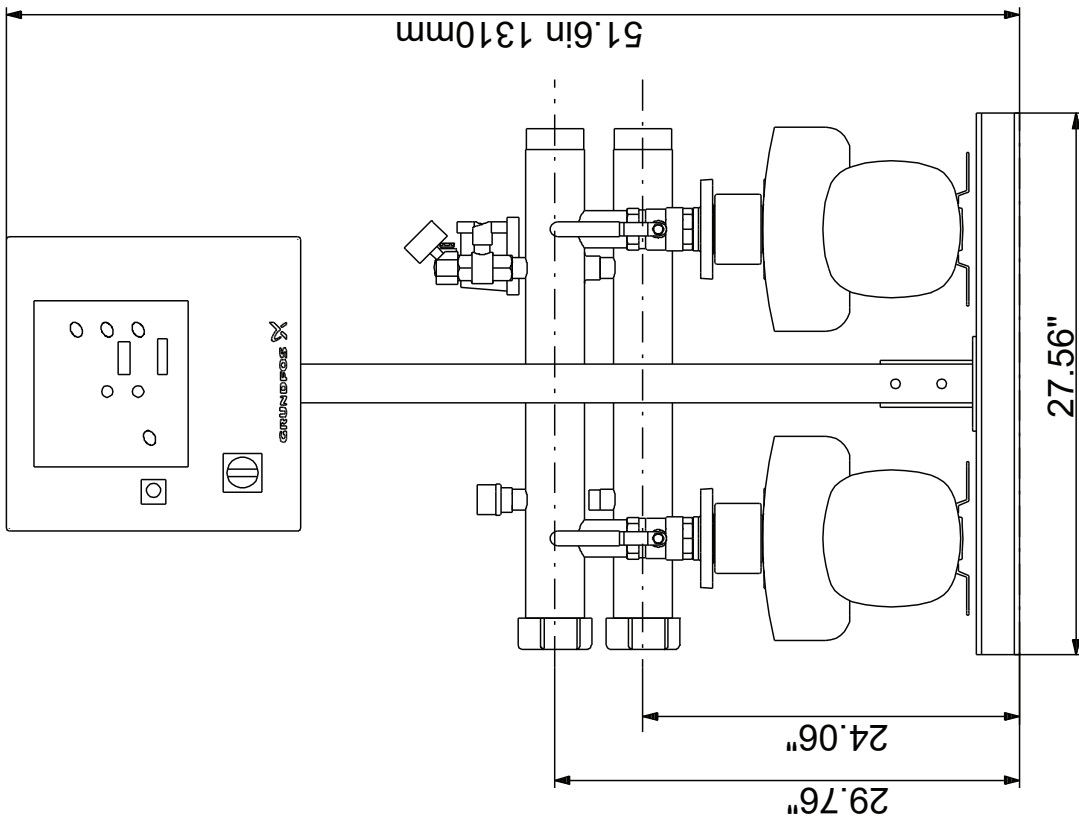
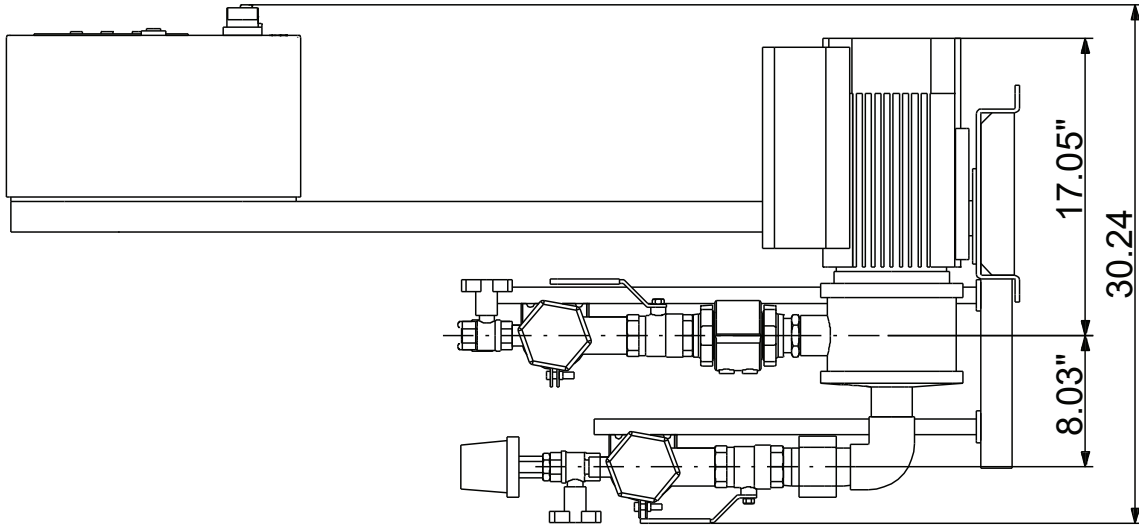


# 91149119 HYDRO MULTI-B/E 2 CME15-3 60 Hz

Description	Value
<b>General information:</b>	
Product name:	HYDRO MULTI-B/E 2 CME15-3
Product No.:	91149119
EAN:	5711490041309
<b>Technical:</b>	
Rated flow:	180 US gpm
Min flow system:	26.4 US gpm
Rated head:	211 ft
Head max:	241.5 ft
Main pump name:	CME15-3
Main pump Number:	98126476
Number of pumps:	2
Model:	A
<b>Materials:</b>	
Pump:	EN-GJL-200
Manifolds:	EN/DIN 1.4571/ AISI 316 TI
<b>Installation:</b>	
Maximum operating pressure:	145 psi
Pipe connection:	3ANSI
<b>Liquid:</b>	
Pumped liquid:	Water
Liquid temperature range:	32 .. 140 °F
Liquid temperature during operation:	68 °F
Density:	62.29 lb/ft³
<b>Electrical data:</b>	
Power (P2) main pump:	7.51 HP
Main frequency:	60 Hz
Rated voltage:	3 x 208-230 V
Starting main:	electronically
Rated current of system:	39.4 A
<b>Controls:</b>	
Control type:	E
Operation unit:	CU323-2
<b>Tank:</b>	
Diaphragm tank:	No
<b>Others:</b>	
Net weight:	460 lb
Gross weight:	683 lb
Product range:	NAMREG
Custom tariff no.:	8413.70.2040

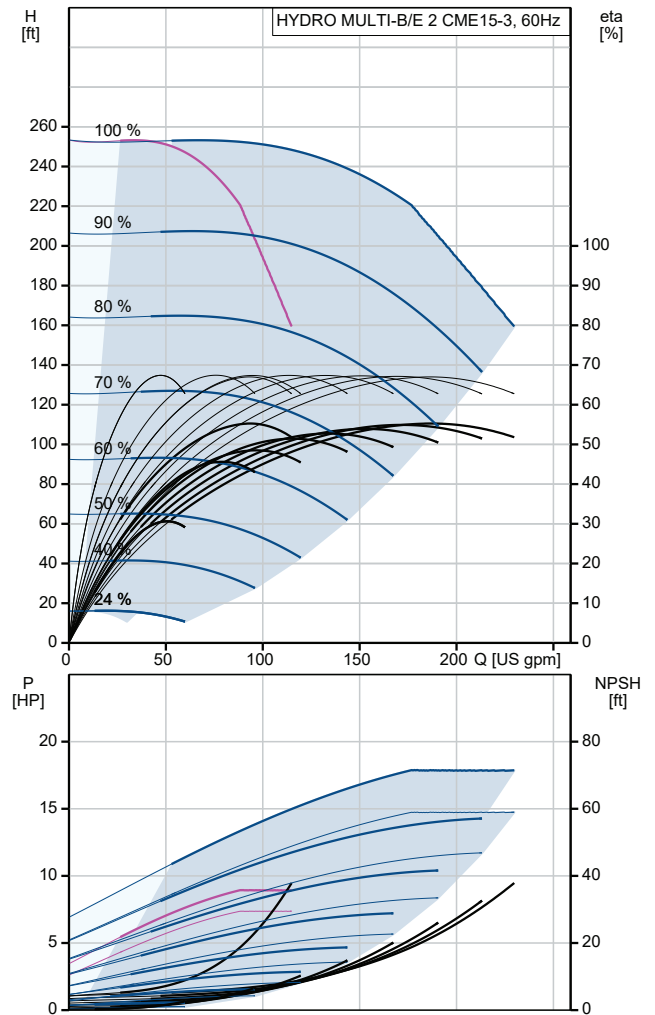


# 91149119 HYDRO MULTI-B/E 2 CME15-3 60 Hz

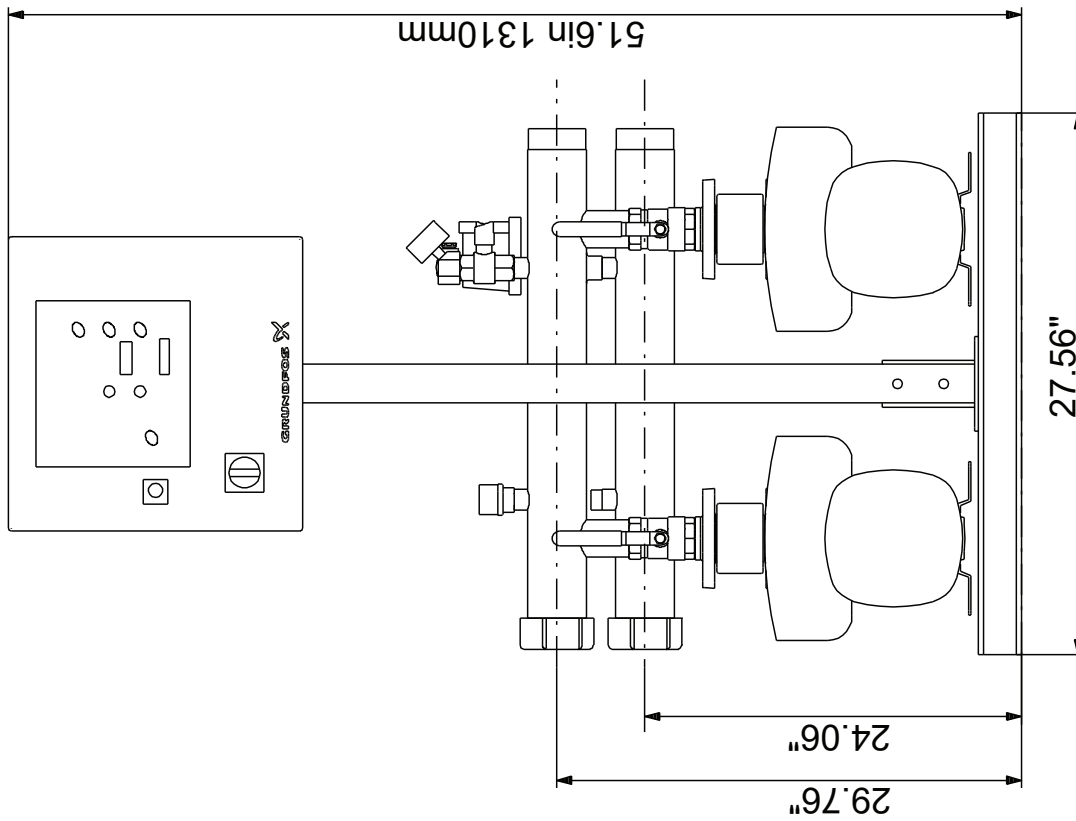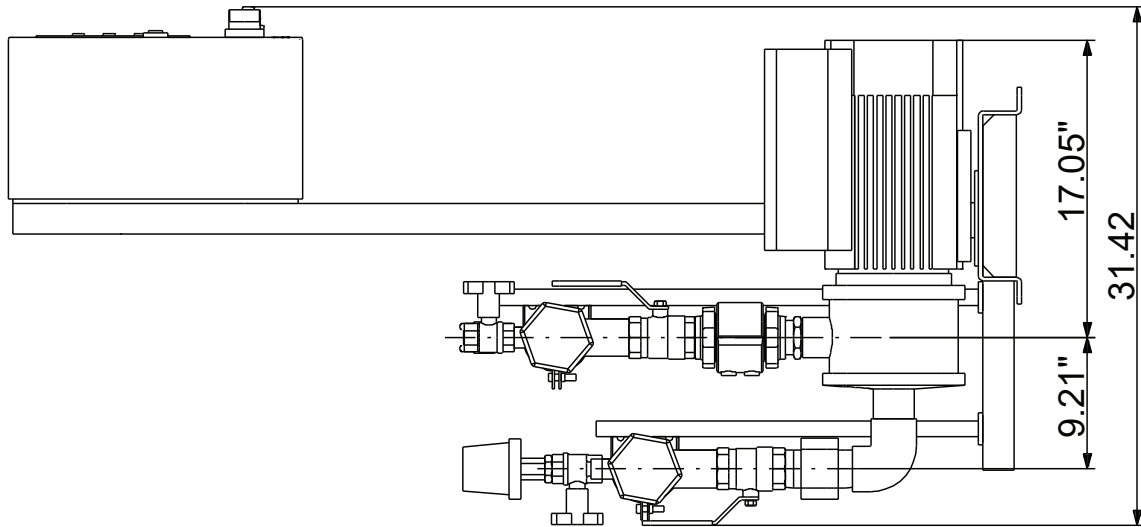



# 91149133 HYDRO MULTI-B/E 2 CME15-3 60 Hz

Description	Value
<b>General information:</b>	
Product name:	HYDRO MULTI-B/E 2 CME15-3
Product No.:	91149133
EAN:	5711490041408
<b>Technical:</b>	
Rated flow:	180 US gpm
Min flow system:	26.4 US gpm
Rated head:	211 ft
Head max:	241.5 ft
Main pump name:	CME15-3
Main pump Number:	99077774
Number of pumps:	2
Model:	A
<b>Materials:</b>	
Pump:	EN-GJL-200
Manifolds:	EN/DIN 1.4571/ AISI 316 TI
<b>Installation:</b>	
Maximum operating pressure:	145 psi
Pipe connection:	3ANSI
<b>Liquid:</b>	
Pumped liquid:	Water
Liquid temperature range:	32 .. 140 °F
Liquid temperature during operation:	68 °F
Density:	62.29 lb/ft <sup>3</sup>
<b>Electrical data:</b>	
Power (P2) main pump:	7.51 HP
Main frequency:	60 Hz
Rated voltage:	3 x 440-480 V
Starting main:	electronically
Rated current of system:	17.8 A
<b>Controls:</b>	
Control type:	E
Operation unit:	CU323-2
<b>Tank:</b>	
Diaphragm tank:	No
<b>Others:</b>	
Net weight:	460 lb
Gross weight:	683 lb
Product range:	NAMREG
Custom tariff no.:	8413.70.2040

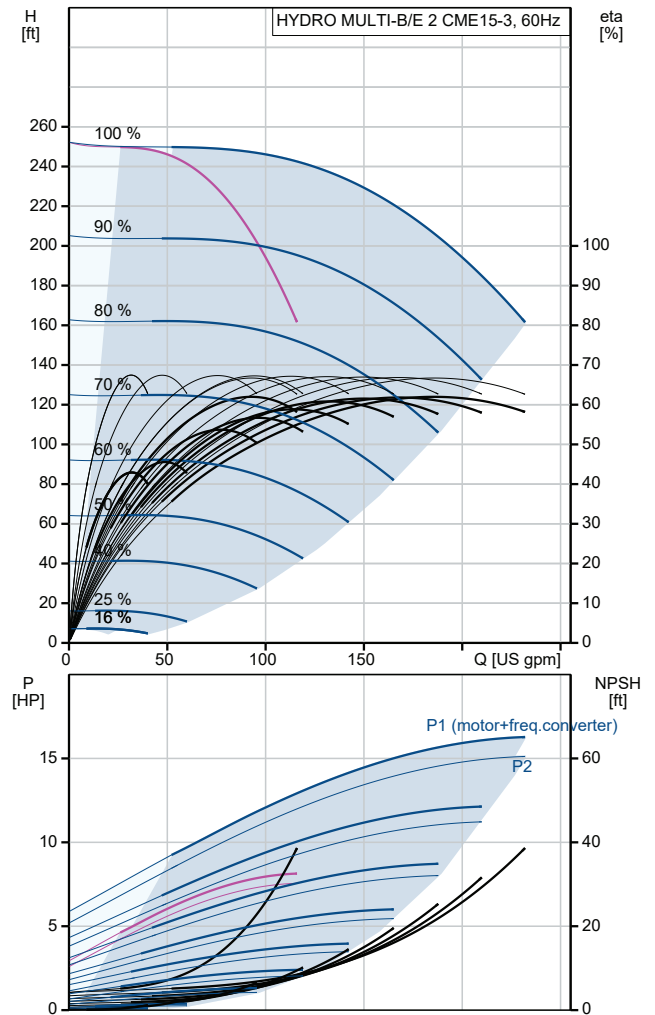




# 91149133 HYDRO MULTI-B/E 2 CME15-3 60 Hz

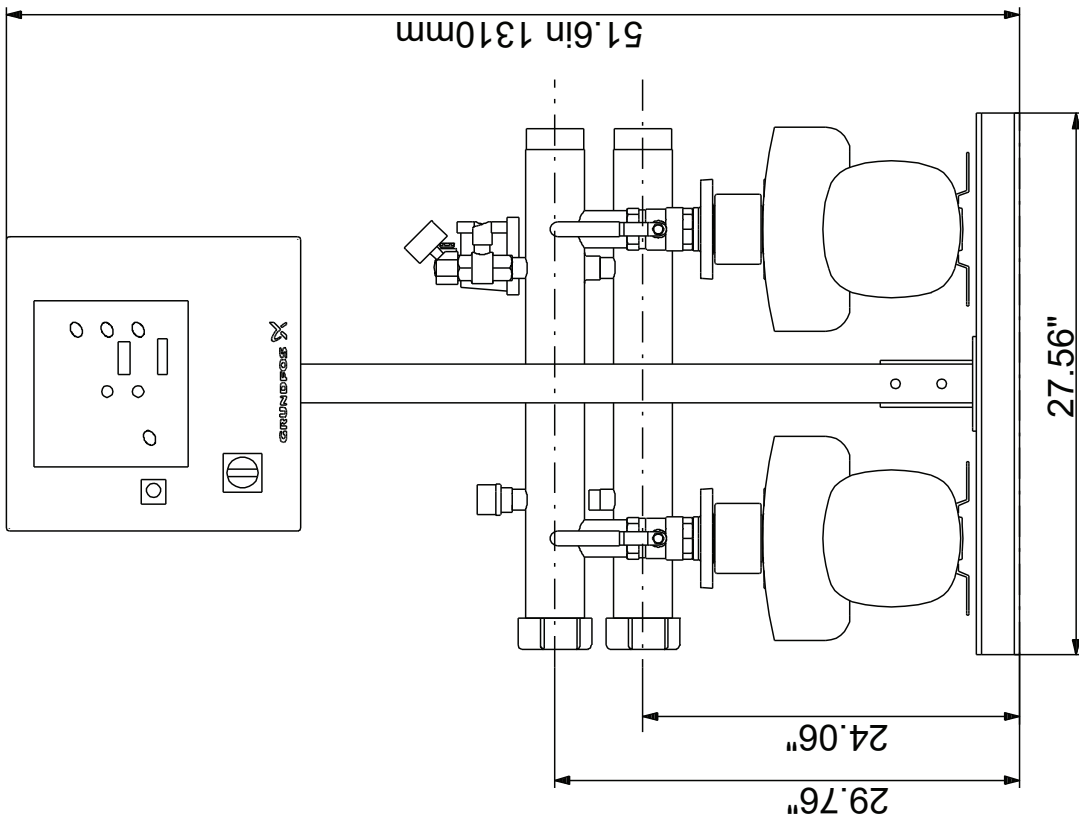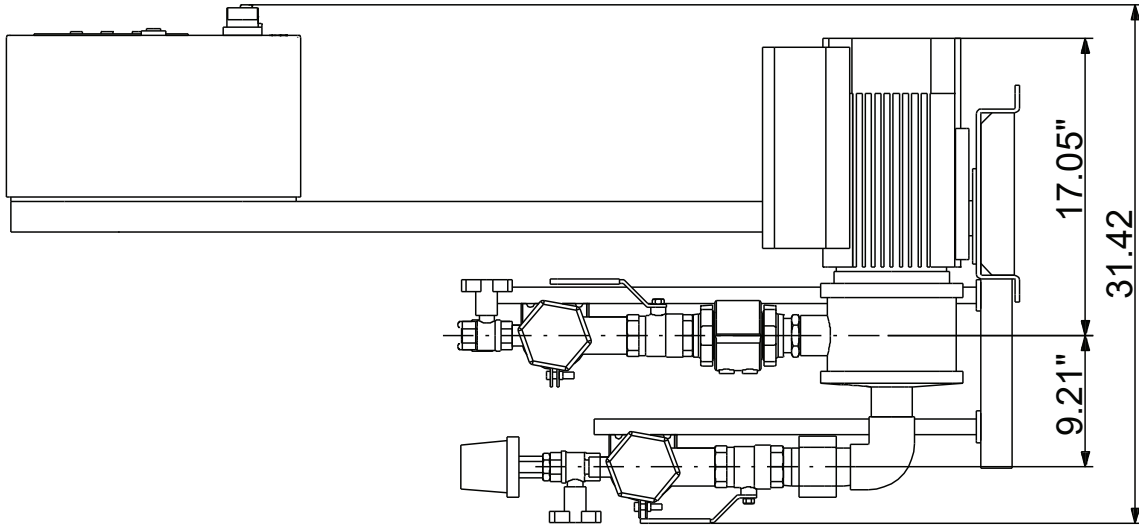


# 91149103 HYDRO MULTI-B/E 3 CME3-3 60 Hz

Description	Value
<b>General information:</b>	
Product name:	HYDRO MULTI-B/E 3 CME3-3
Product No.:	91149103
EAN:	5711490041187
<b>Technical:</b>	
Rated flow:	48.9 US gpm
Min flow system:	4.4 US gpm
Rated head:	97.45 ft
Head max:	129.3 ft
Main pump name:	CME3-3
Main pump Number:	98395056
Number of pumps:	3
Model:	A
<b>Materials:</b>	
Pump:	EN-GJL-200
Manifolds:	EN/DIN 1.4571/ AISI 316 TI
<b>Installation:</b>	
Maximum operating pressure:	145 psi
Pipe connection:	2NPT
<b>Liquid:</b>	
Pumped liquid:	Water
Liquid temperature range:	32 .. 140 °F
Liquid temperature during operation:	68 °F
Density:	62.29 lb/ft <sup>3</sup>
<b>Electrical data:</b>	
Power (P2) main pump:	1.5 HP
Main frequency:	60 Hz
Rated voltage:	1 x 200-240 V
Starting main:	electronically
Rated current of system:	19.7 A
<b>Controls:</b>	
Control type:	E
Operation unit:	CU323-3
<b>Tank:</b>	
Diaphragm tank:	No
<b>Others:</b>	
Net weight:	265 lb
Gross weight:	487 lb
Product range:	NAMREG
Custom tariff no.:	8413.70.2040

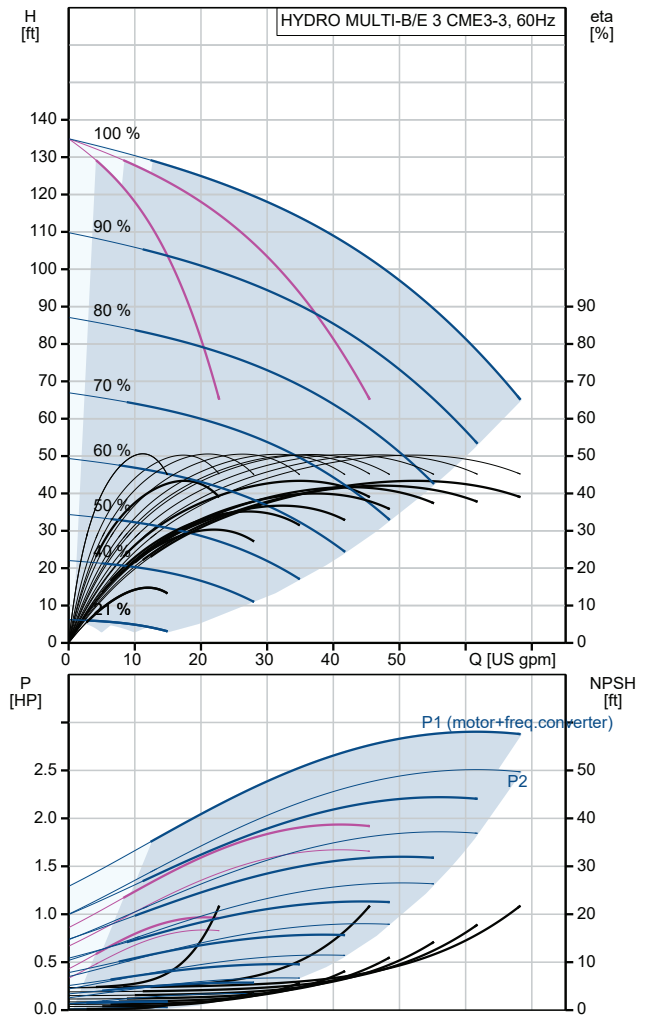


# 91149103 HYDRO MULTI-B/E 3 CME3-3 60 Hz


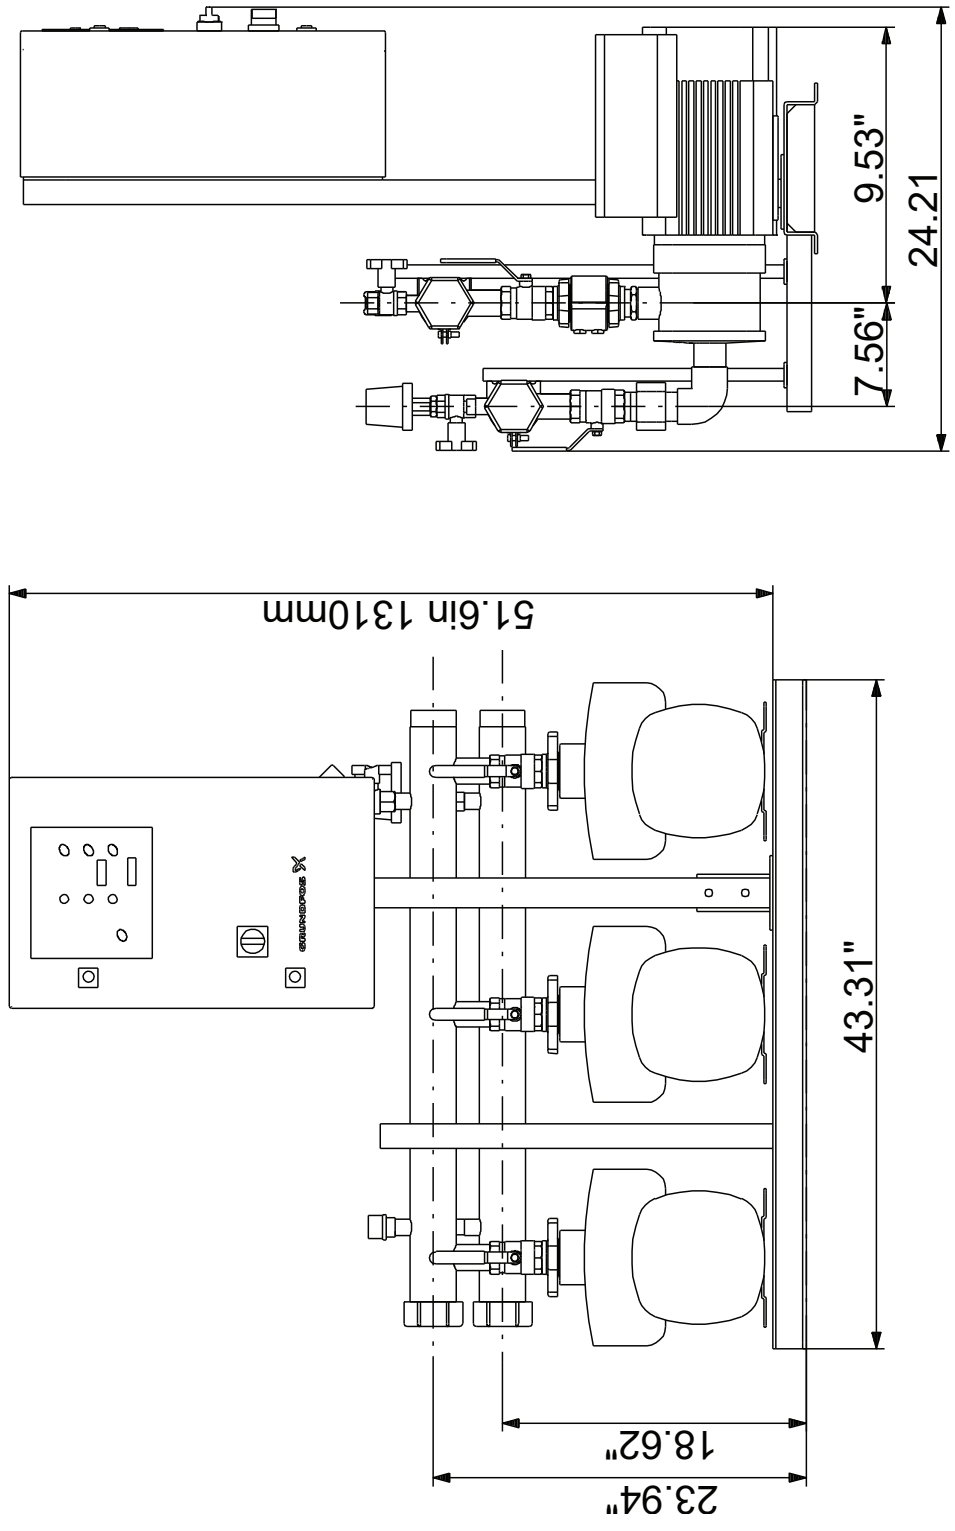


# 91149104 HYDRO MULTI-B/E 3 CME3-5 60 Hz

Description	Value
<b>General information:</b>	
Product name:	HYDRO MULTI-B/E 3 CME3-5
Product No.:	91149104
EAN:	5711490038453
<b>Technical:</b>	
Rated flow:	48.9 US gpm
Min flow system:	4.4 US gpm
Rated head:	164.1 ft
Head max:	217.2 ft
Main pump name:	CME3-5
Main pump Number:	98395082
Number of pumps:	3
Model:	A
<b>Materials:</b>	
Pump:	EN-GJL-200
Manifolds:	EN/DIN 1.4571/ AISI 316 TI
<b>Installation:</b>	
Maximum operating pressure:	145 psi
Pipe connection:	2NPT
<b>Liquid:</b>	
Pumped liquid:	Water
Liquid temperature range:	32 .. 140 °F
Liquid temperature during operation:	68 °F
Density:	62.29 lb/ft³
<b>Electrical data:</b>	
Power (P2) main pump:	1.5 HP
Main frequency:	60 Hz
Rated voltage:	1 x 200-240 V
Starting main:	electronically
Rated current of system:	19.7 A
<b>Controls:</b>	
Control type:	E
Operation unit:	CU323-3
<b>Tank:</b>	
Diaphragm tank:	No
<b>Others:</b>	
Net weight:	269 lb
Gross weight:	492 lb
Product range:	NAMREG
Custom tariff no.:	8413.70.2040

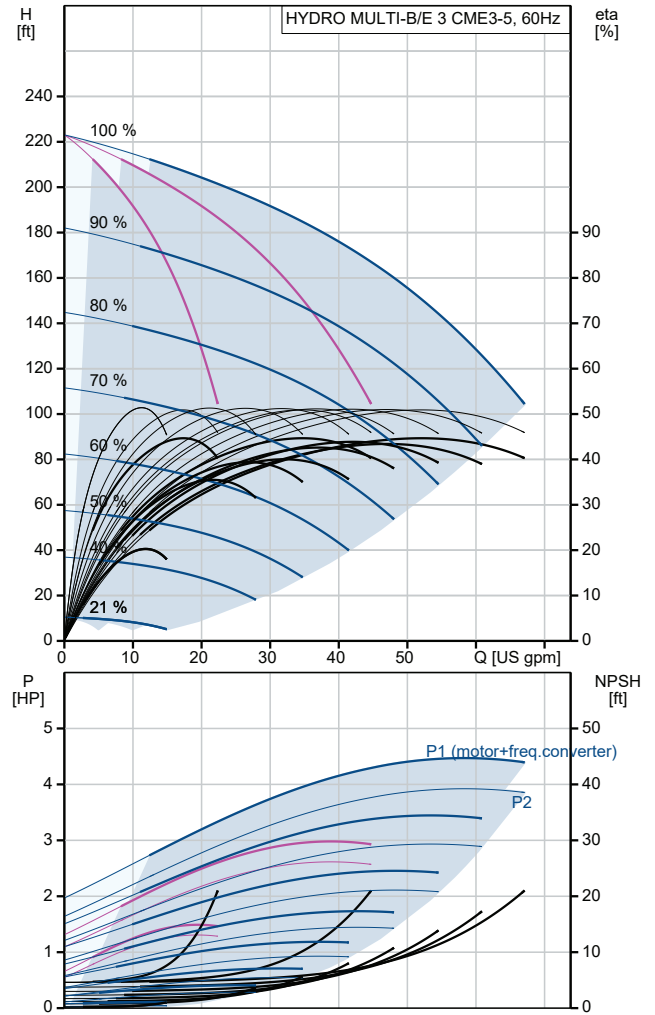


# 91149104 HYDRO MULTI-B/E 3 CME3-5 60 Hz

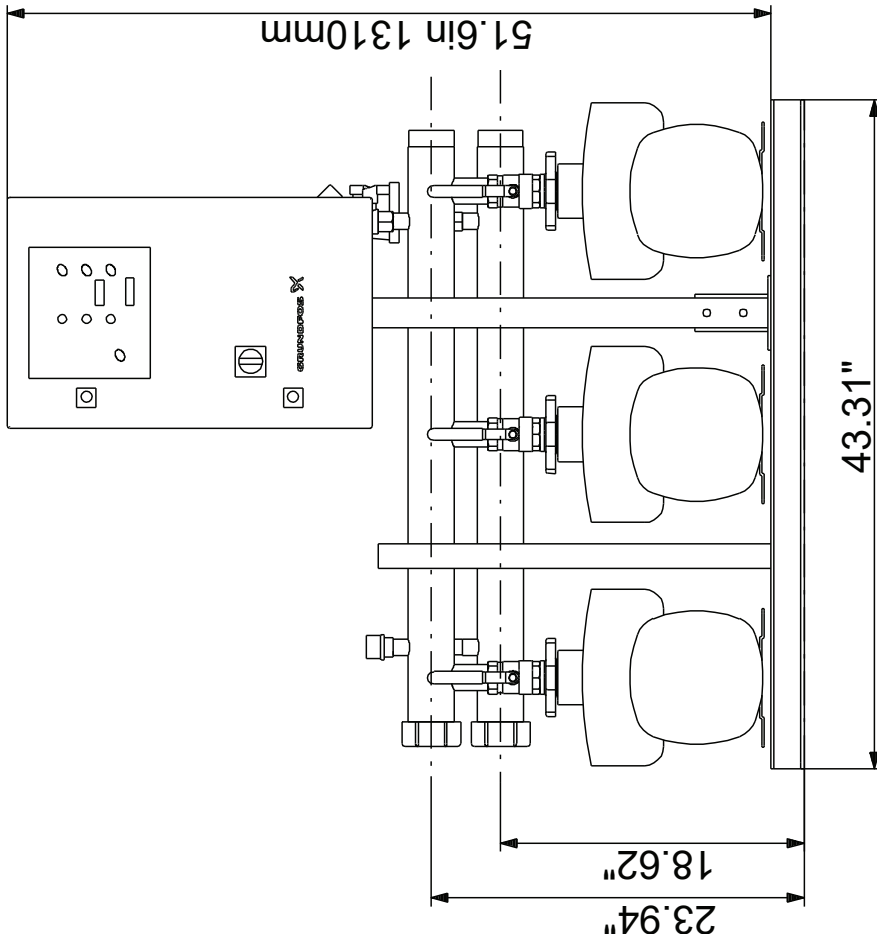
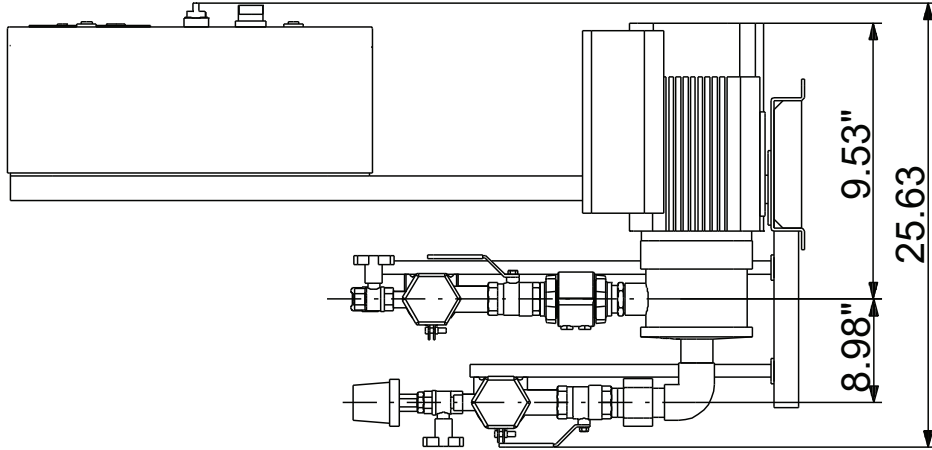


# 91149107 HYDRO MULTI-B/E 3 CME5-3 60 Hz

Description	Value
<b>General information:</b>	
Product name:	HYDRO MULTI-B/E 3 CME5-3
Product No.:	91149107
EAN:	5711490038484
<b>Technical:</b>	
Rated flow:	74 US gpm
Min flow system:	7.04 US gpm
Rated head:	107.6 ft
Head max:	130.6 ft
Main pump name:	CME5-3
Main pump Number:	98395101
Number of pumps:	3
Model:	A
<b>Materials:</b>	
Pump:	EN-GJL-200
Manifolds:	EN/DIN 1.4571/ AISI 316 TI
<b>Installation:</b>	
Maximum operating pressure:	145 psi
Pipe connection:	2NPT
<b>Liquid:</b>	
Pumped liquid:	Water
Liquid temperature range:	32 .. 140 °F
Liquid temperature during operation:	68 °F
Density:	62.29 lb/ft³
<b>Electrical data:</b>	
Power (P2) main pump:	1.5 HP
Main frequency:	60 Hz
Rated voltage:	1 x 200-240 V
Starting main:	electronically
Rated current of system:	19.7 A
<b>Controls:</b>	
Control type:	E
Operation unit:	CU323-3
<b>Tank:</b>	
Diaphragm tank:	No
<b>Others:</b>	
Net weight:	267 lb
Gross weight:	490 lb
Product range:	NAMREG
Custom tariff no.:	8413.70.2040

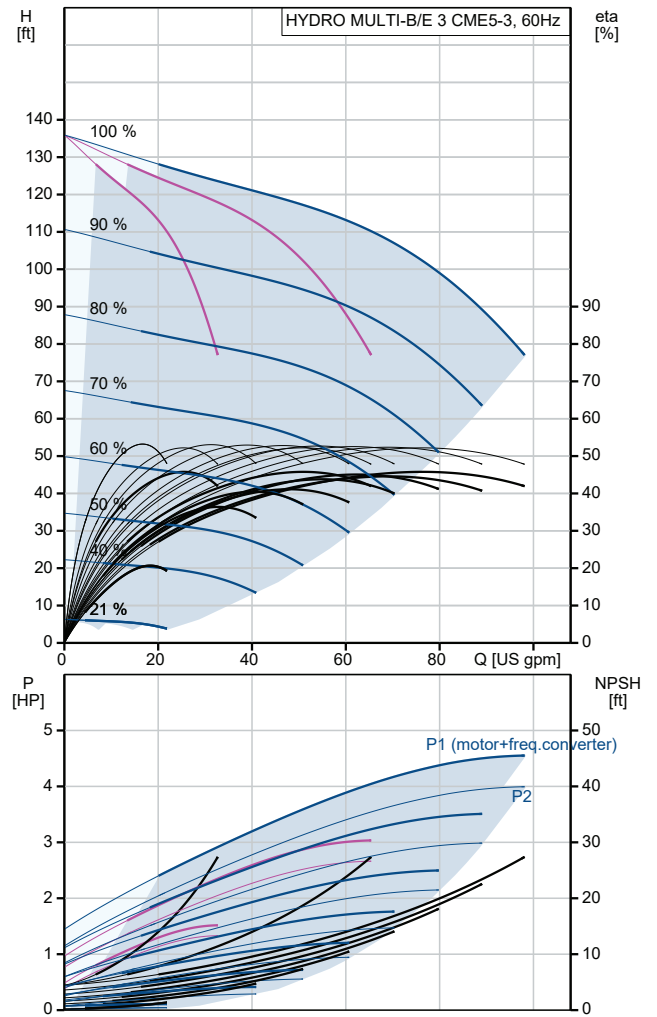


# 91149107 HYDRO MULTI-B/E 3 CME5-3 60 Hz

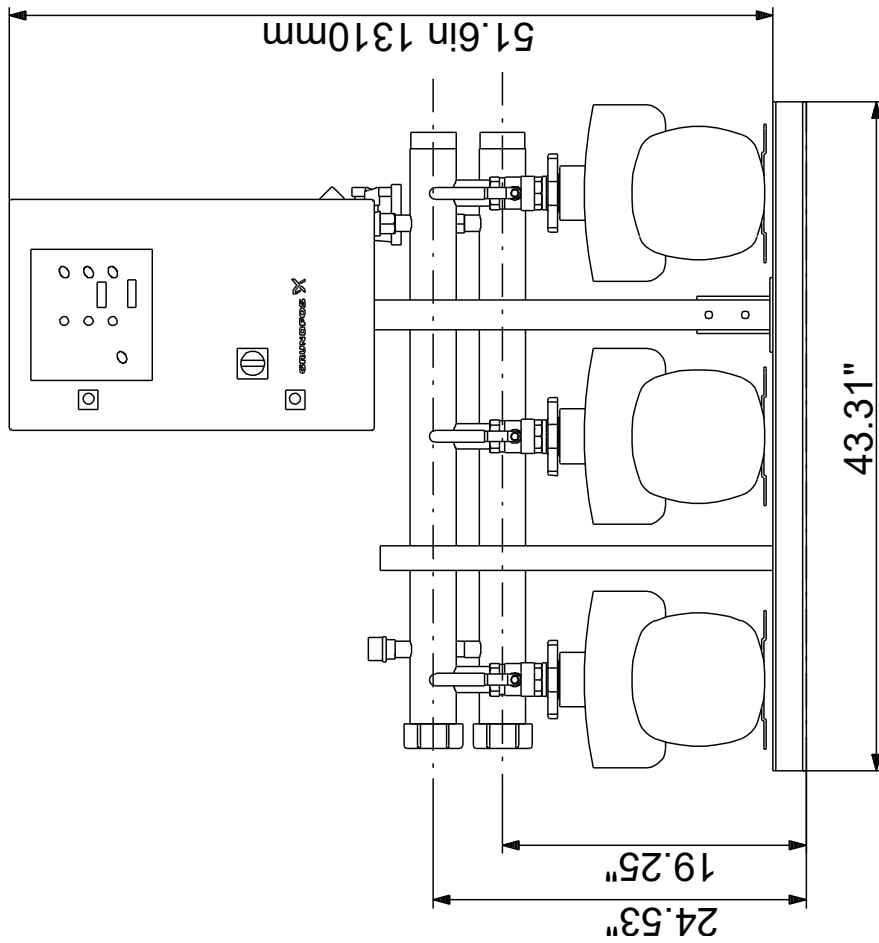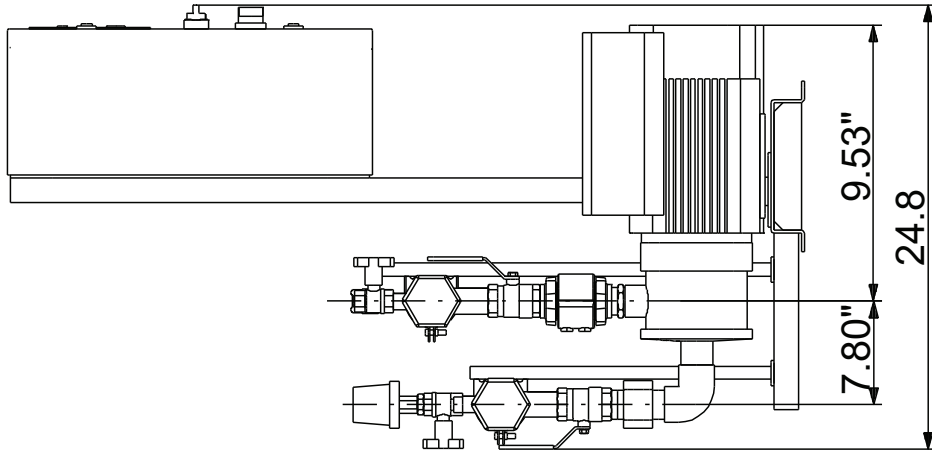



# 91149108 HYDRO MULTI-B/E 3 CME5-4 60 Hz

Description	Value
<b>General information:</b>	
Product name:	HYDRO MULTI-B/E 3 CME5-4
Product No.:	91149108
EAN:	5711490038491
<b>Technical:</b>	
Rated flow:	74 US gpm
Min flow system:	7.04 US gpm
Rated head:	145 ft
Head max:	174.9 ft
Main pump name:	CME5-4
Main pump Number:	98395336
Number of pumps:	3
Model:	A
<b>Materials:</b>	
Pump:	EN-GJL-200
Manifolds:	EN/DIN 1.4571/ AISI 316 TI
<b>Installation:</b>	
Maximum operating pressure:	145 psi
Pipe connection:	2NPT
<b>Liquid:</b>	
Pumped liquid:	Water
Liquid temperature range:	32 .. 140 °F
Liquid temperature during operation:	68 °F
Density:	62.29 lb/ft <sup>3</sup>
<b>Electrical data:</b>	
Power (P2) main pump:	2 HP
Main frequency:	60 Hz
Rated voltage:	1 x 200-240 V
Starting main:	electronically
Rated current of system:	26.7 A
<b>Controls:</b>	
Control type:	E
Operation unit:	CU323-3
<b>Tank:</b>	
Diaphragm tank:	No
<b>Others:</b>	
Net weight:	293 lb
Gross weight:	516 lb
Product range:	NAMREG
Custom tariff no.:	8413.70.2040

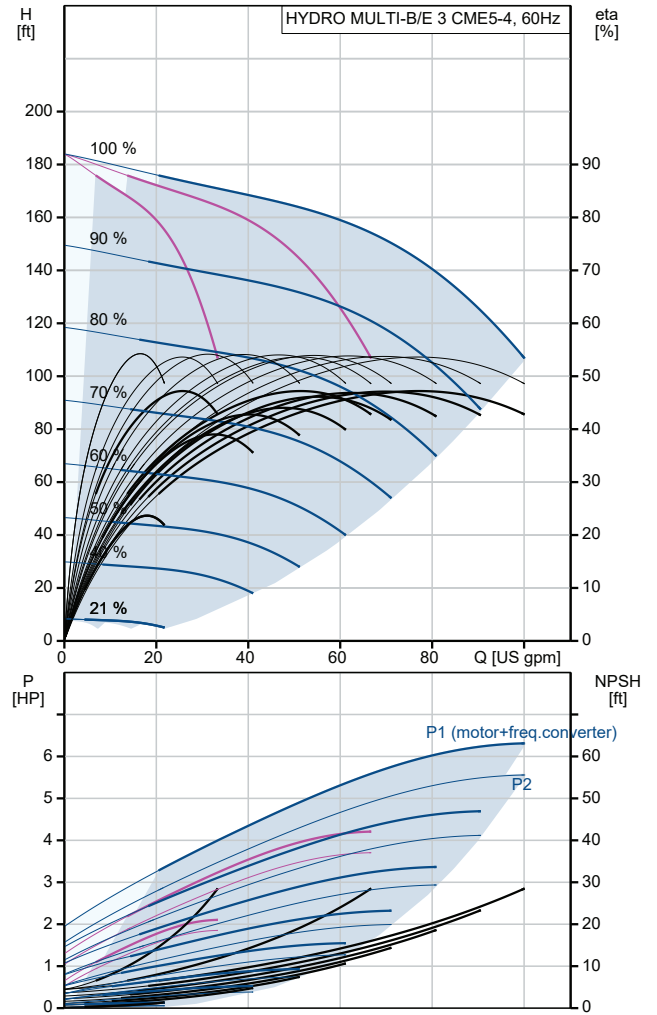




# 91149108 HYDRO MULTI-B/E 3 CME5-4 60 Hz

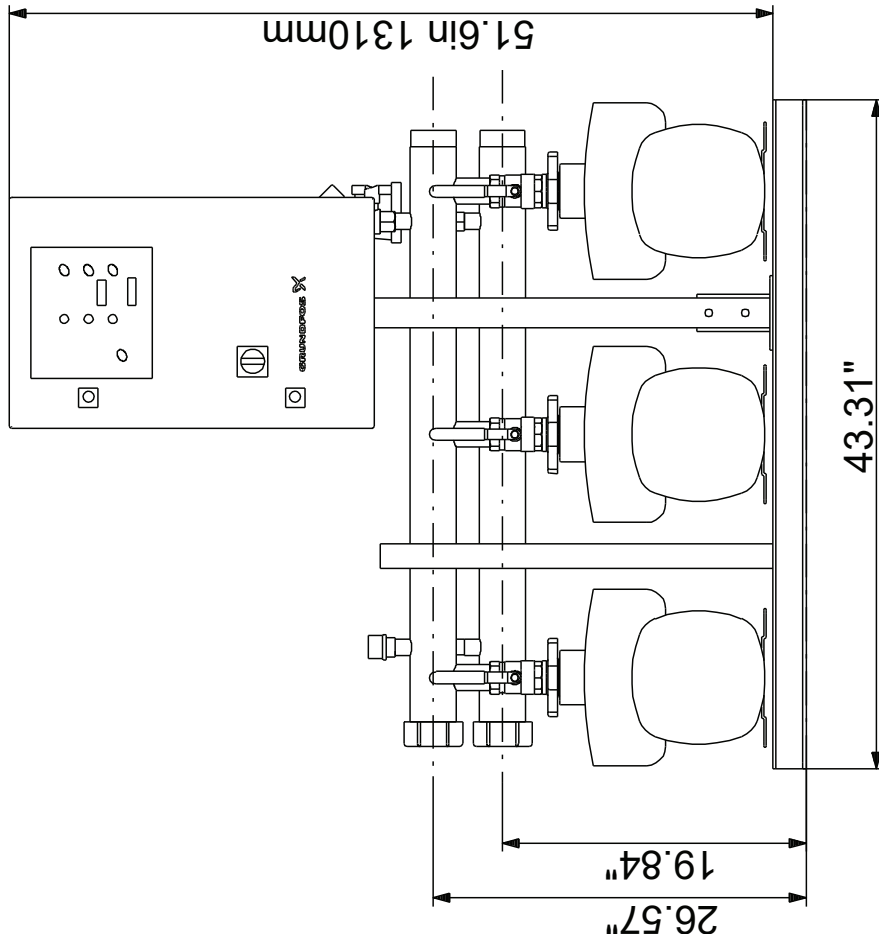
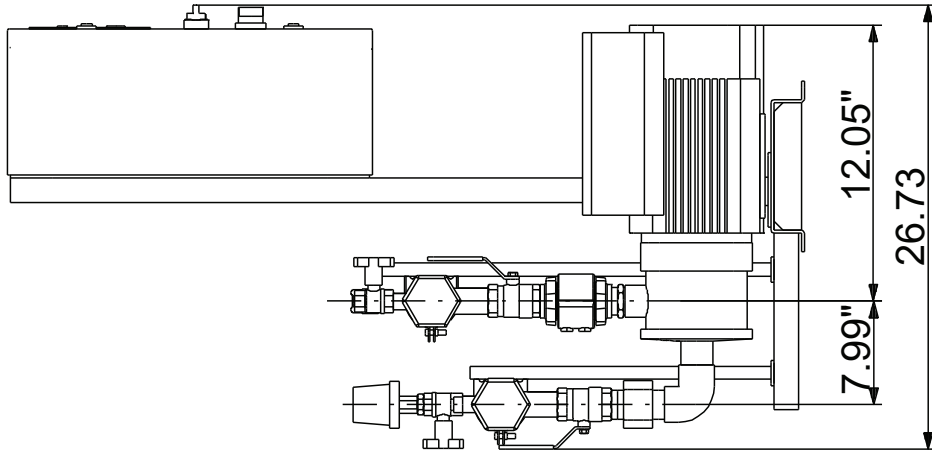


# 91149112 HYDRO MULTI-B/E 3 CME5-4 60 Hz

Description	Value
<b>General information:</b>	
Product name:	HYDRO MULTI-B/E 3 CME5-4
Product No.:	91149112
EAN:	5711490041217
<b>Technical:</b>	
Rated flow:	74 US gpm
Min flow system:	7.04 US gpm
Rated head:	145 ft
Head max:	174.9 ft
Main pump name:	CME5-4
Main pump Number:	98126046
Number of pumps:	3
Model:	A
<b>Materials:</b>	
Pump:	EN-GJL-200
Manifolds:	EN/DIN 1.4571/ AISI 316 TI
<b>Installation:</b>	
Maximum operating pressure:	145 psi
Pipe connection:	2NPT
<b>Liquid:</b>	
Pumped liquid:	Water
Liquid temperature range:	32 .. 140 °F
Liquid temperature during operation:	68 °F
Density:	62.29 lb/ft³
<b>Electrical data:</b>	
Power (P2) main pump:	2 HP
Main frequency:	60 Hz
Rated voltage:	3 x 208-230 V
Starting main:	electronically
Rated current of system:	16.8 A
<b>Controls:</b>	
Control type:	E
Operation unit:	CU323-3
<b>Tank:</b>	
Diaphragm tank:	No
<b>Others:</b>	
Net weight:	388 lb
Gross weight:	611 lb
Product range:	NAMREG
Custom tariff no.:	8413.70.2040

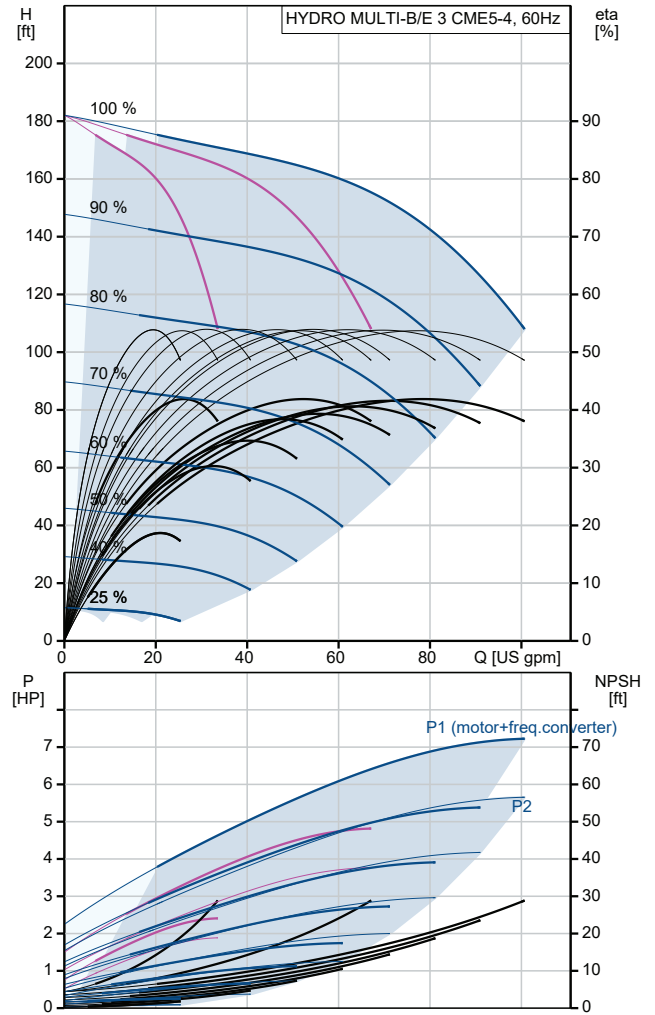


# 91149112 HYDRO MULTI-B/E 3 CME5-4 60 Hz

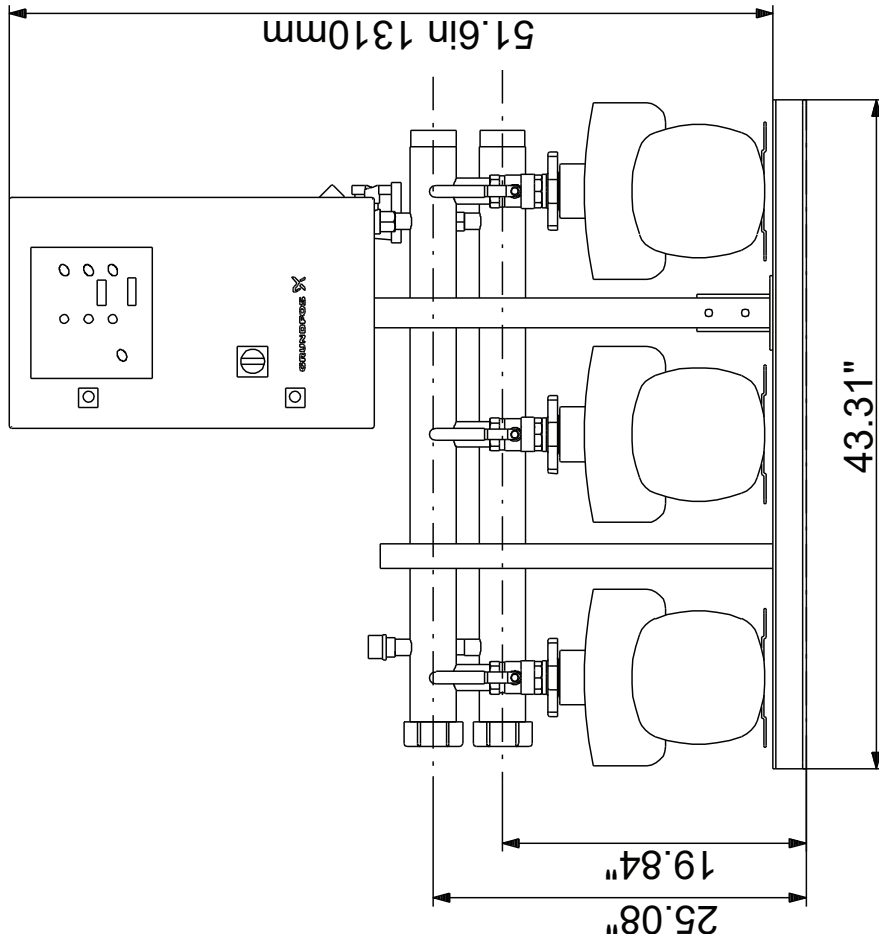
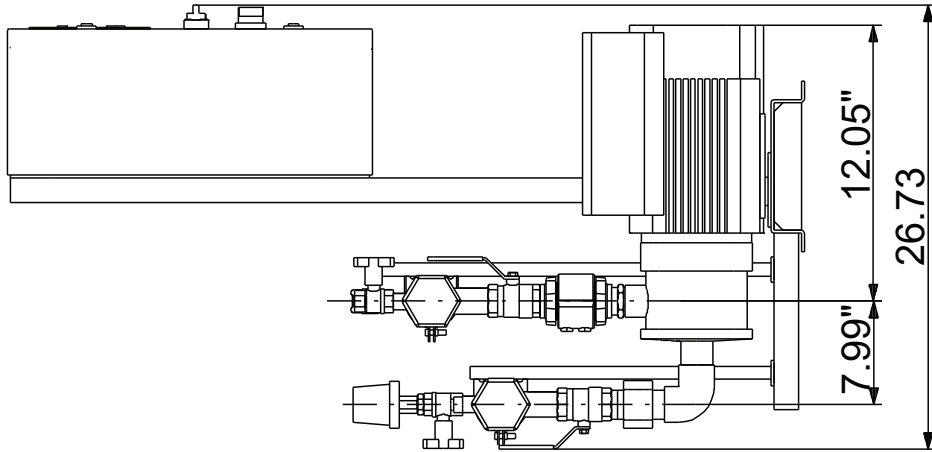


# 91149125 HYDRO MULTI-B/E 3 CME5-4 60 Hz

Description	Value
<b>General information:</b>	
Product name:	HYDRO MULTI-B/E 3 CME5-4
Product No.:	91149125
EAN:	5711490038767
<b>Technical:</b>	
Rated flow:	74 US gpm
Min flow system:	7.04 US gpm
Rated head:	145 ft
Head max:	174.9 ft
Main pump name:	CME5-4
Main pump Number:	98395711
Number of pumps:	3
Model:	A
<b>Materials:</b>	
Pump:	EN-GJL-200
Manifolds:	EN/DIN 1.4571/ AISI 316 TI
<b>Installation:</b>	
Maximum operating pressure:	145 psi
Pipe connection:	2NPT
<b>Liquid:</b>	
Pumped liquid:	Water
Liquid temperature range:	32 .. 140 °F
Liquid temperature during operation:	68 °F
Density:	62.29 lb/ft <sup>3</sup>
<b>Electrical data:</b>	
Power (P2) main pump:	2 HP
Main frequency:	60 Hz
Rated voltage:	3 x 460-480 V
Starting main:	electronically
Rated current of system:	8.7 A
<b>Controls:</b>	
Control type:	E
Operation unit:	CU323-3
<b>Tank:</b>	
Diaphragm tank:	No
<b>Others:</b>	
Net weight:	304 lb
Gross weight:	527 lb
Product range:	NAMREG
Custom tariff no.:	8413.70.2040

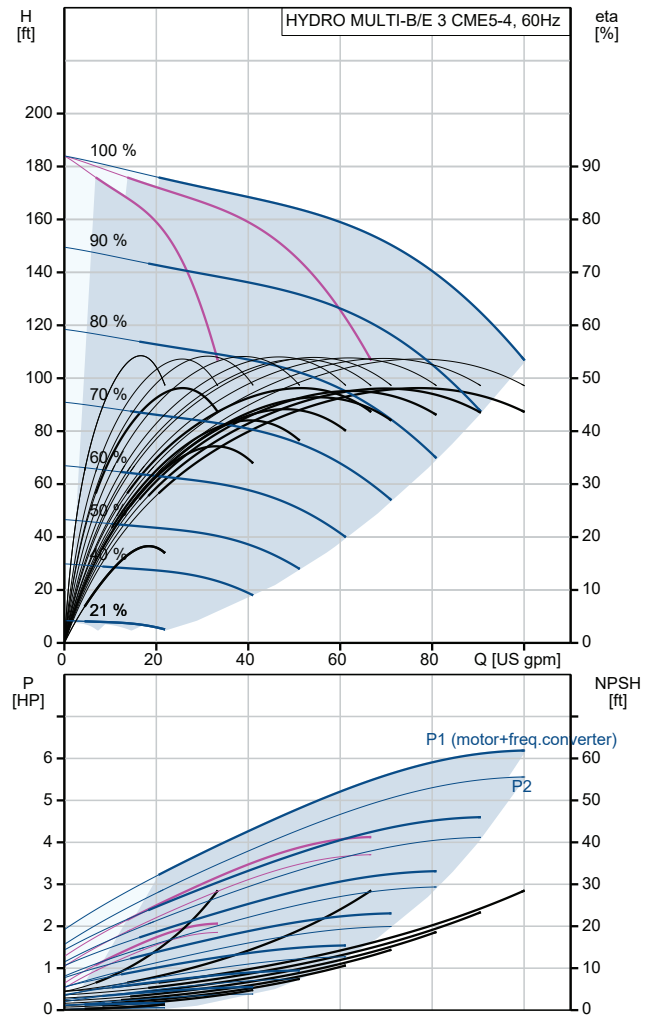


# 91149125 HYDRO MULTI-B/E 3 CME5-4 60 Hz

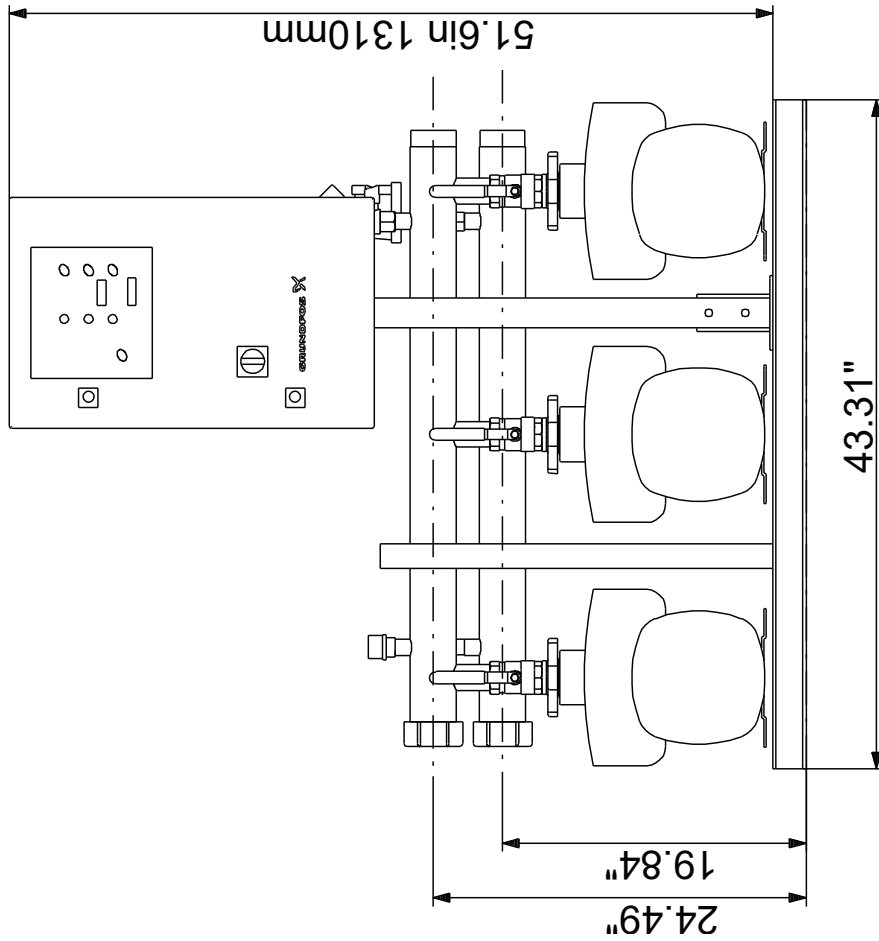
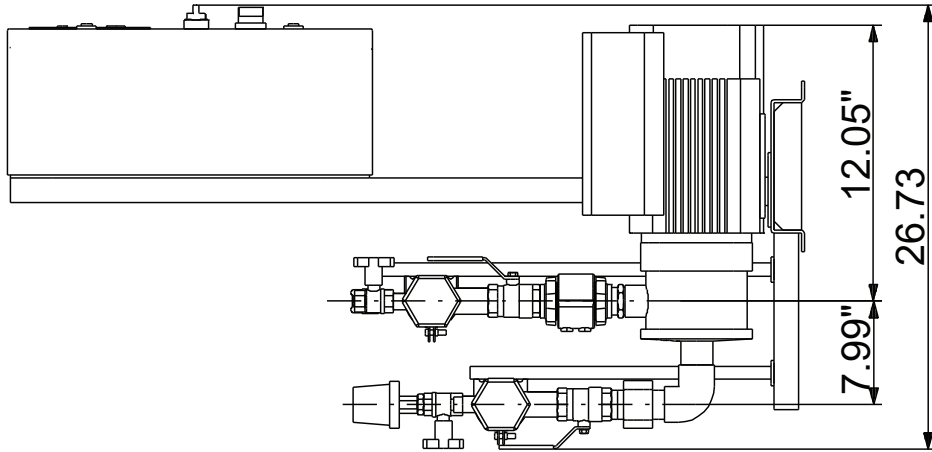


# 91149126 HYDRO MULTI-B/E 3 CME5-5 60 Hz

Description	Value
<b>General information:</b>	
Product name:	HYDRO MULTI-B/E 3 CME5-5
Product No.:	91149126
EAN:	5711490038774
<b>Technical:</b>	
Rated flow:	74 US gpm
Min flow system:	7.04 US gpm
Rated head:	182.4 ft
Head max:	219.2 ft
Main pump name:	CME5-5
Main pump Number:	98399402
Number of pumps:	3
Model:	A
<b>Materials:</b>	
Pump:	EN-GJL-200
Manifolds:	EN/DIN 1.4571/ AISI 316 TI
<b>Installation:</b>	
Maximum operating pressure:	145 psi
Pipe connection:	2NPT
<b>Liquid:</b>	
Pumped liquid:	Water
Liquid temperature range:	32 .. 140 °F
Liquid temperature during operation:	68 °F
Density:	62.29 lb/ft³
<b>Electrical data:</b>	
Power (P2) main pump:	2 HP
Main frequency:	60 Hz
Rated voltage:	3 x 460-480 V
Starting main:	electronically
Rated current of system:	8.7 A
<b>Controls:</b>	
Control type:	E
Operation unit:	CU323-3
<b>Tank:</b>	
Diaphragm tank:	No
<b>Others:</b>	
Net weight:	306 lb
Gross weight:	529 lb
Product range:	NAMREG
Custom tariff no.:	8413.70.2040

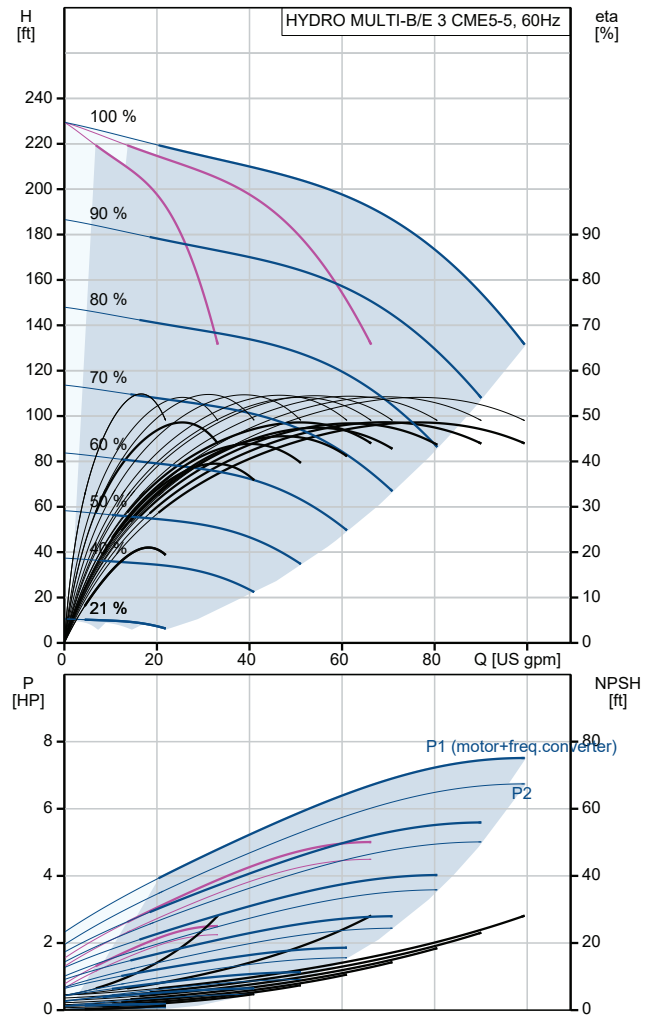


# 91149126 HYDRO MULTI-B/E 3 CME5-5 60 Hz

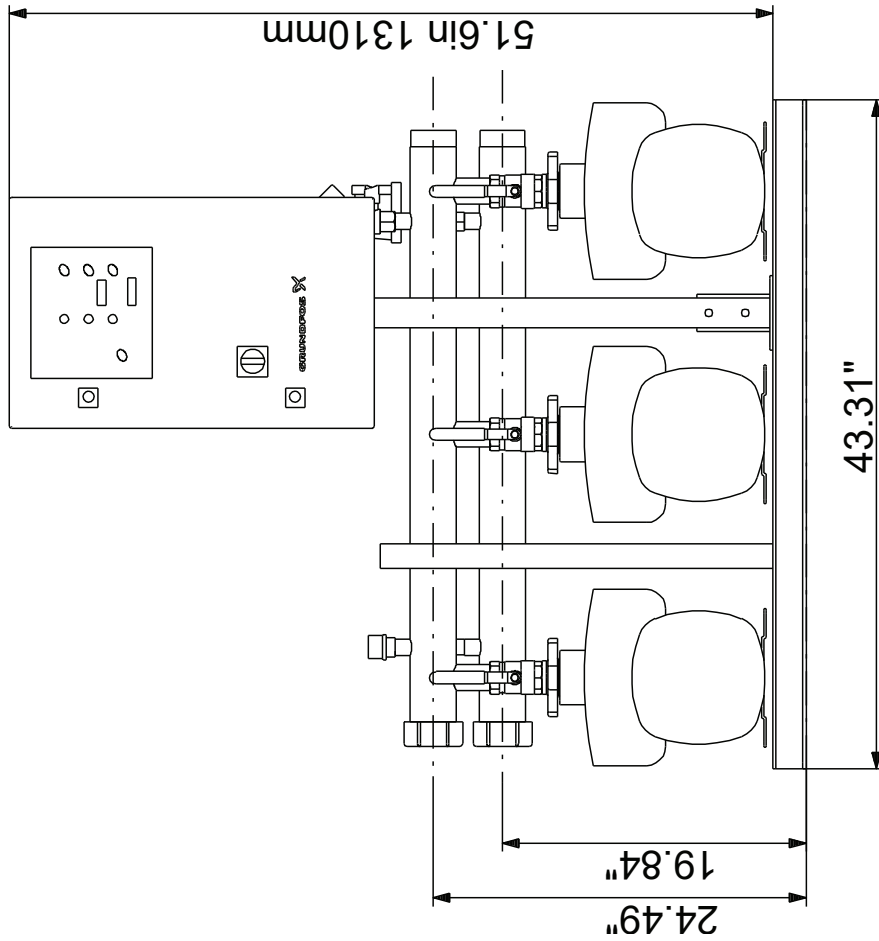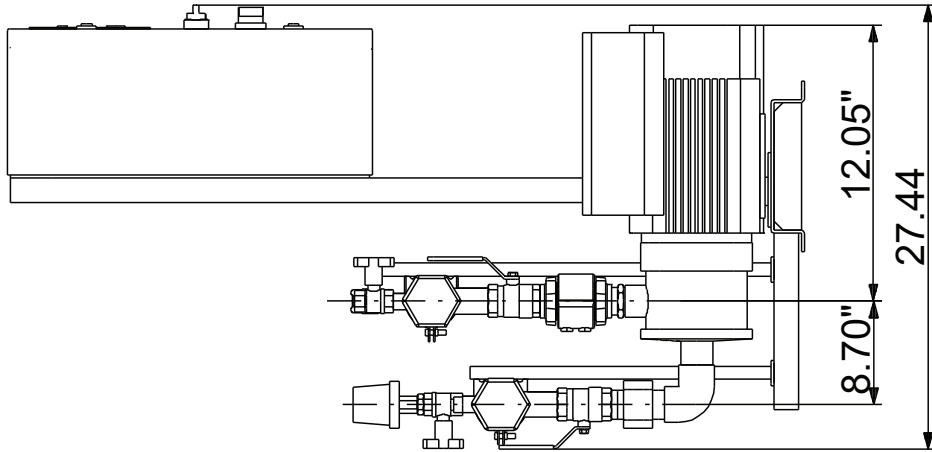


# 91149110 HYDRO MULTI-B/E 3 CME10-1 60 Hz

Description	Value
<b>General information:</b>	
Product name:	HYDRO MULTI-B/E 3 CME10-1
Product No.:	91149110
EAN:	5711490038613
<b>Technical:</b>	
Rated flow:	159 US gpm
Min flow system:	15.9 US gpm
Rated head:	64.64 ft
Head max:	77.43 ft
Main pump name:	CME10-1
Main pump Number:	98395030
Number of pumps:	3
Model:	A
<b>Materials:</b>	
Pump:	EN-GJL-200
Manifolds:	EN/DIN 1.4571/ AISI 316 TI
<b>Installation:</b>	
Maximum operating pressure:	145 psi
Pipe connection:	2.5NPT
<b>Liquid:</b>	
Pumped liquid:	Water
Liquid temperature range:	32 .. 140 °F
Liquid temperature during operation:	68 °F
Density:	62.29 lb/ft³
<b>Electrical data:</b>	
Power (P2) main pump:	1.5 HP
Main frequency:	60 Hz
Rated voltage:	1 x 200-240 V
Starting main:	electronically
Rated current of system:	19.7 A
<b>Controls:</b>	
Control type:	E
Operation unit:	CU323-3
<b>Tank:</b>	
Diaphragm tank:	No
<b>Others:</b>	
Net weight:	359 lb
Gross weight:	582 lb
Product range:	NAMREG
Custom tariff no.:	8413.70.2040

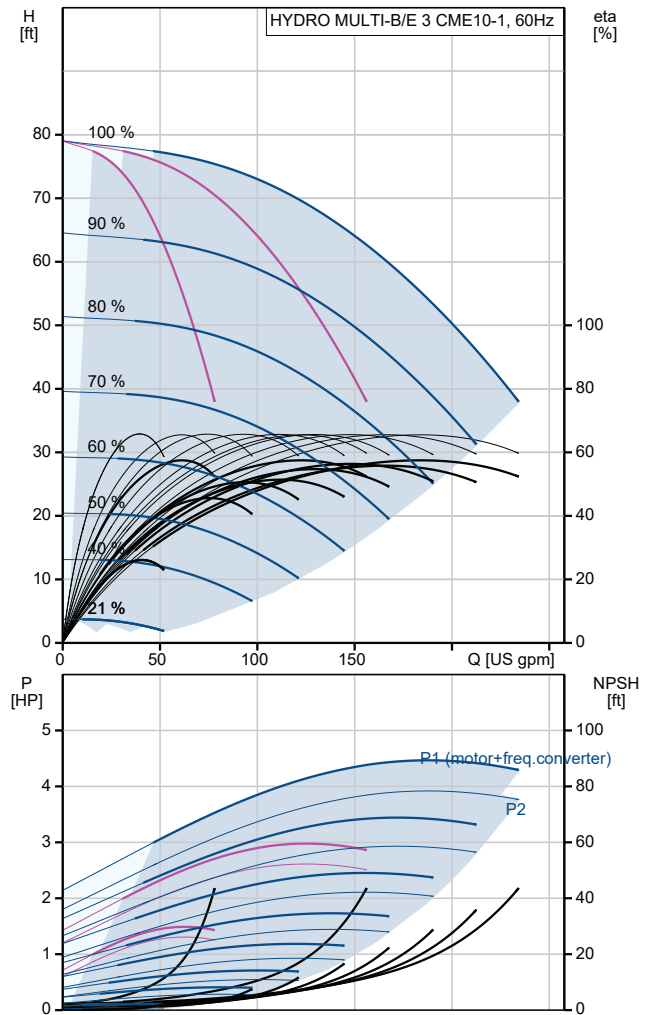




# 91149110 HYDRO MULTI-B/E 3 CME10-1 60 Hz


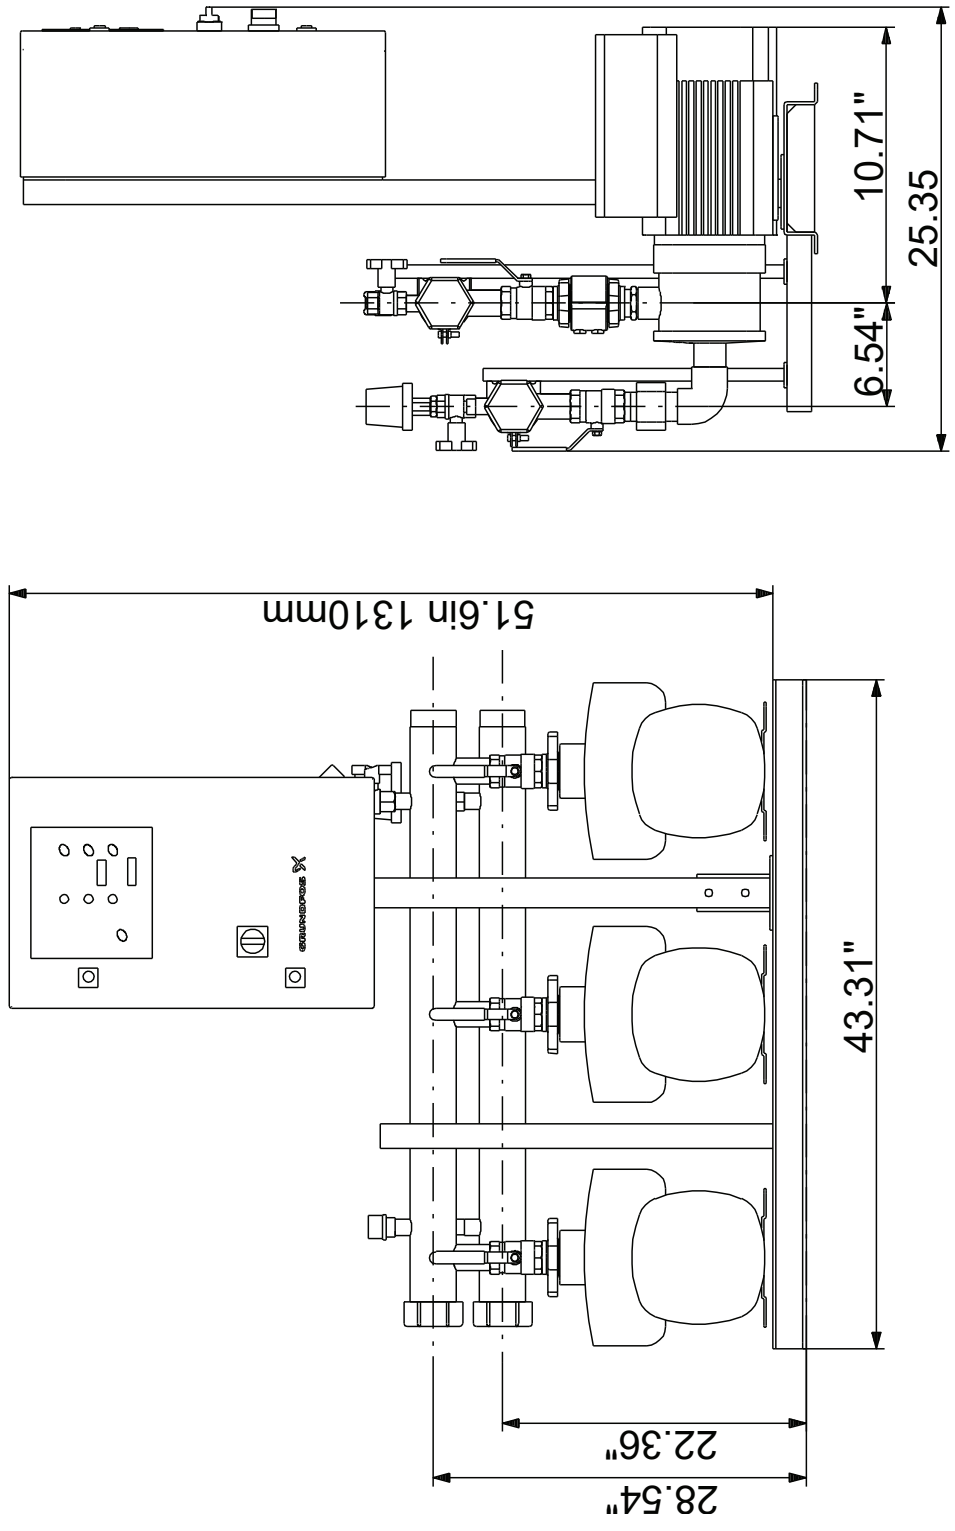


# 91149115 HYDRO MULTI-B/E 3 CME10-2 60 Hz

Description	Value
<b>General information:</b>	
Product name:	HYDRO MULTI-B/E 3 CME10-2
Product No.:	91149115
EAN:	5711490041286
<b>Technical:</b>	
Rated flow:	159 US gpm
Min flow system:	15.9 US gpm
Rated head:	128 ft
Head max:	150.9 ft
Main pump name:	CME10-2
Main pump Number:	98126308
Number of pumps:	3
Model:	A
<b>Materials:</b>	
Pump:	EN-GJL-200
Manifolds:	EN/DIN 1.4571/ AISI 316 TI
<b>Installation:</b>	
Maximum operating pressure:	145 psi
Pipe connection:	2.5NPT
<b>Liquid:</b>	
Pumped liquid:	Water
Liquid temperature range:	32 .. 140 °F
Liquid temperature during operation:	68 °F
Density:	62.29 lb/ft³
<b>Electrical data:</b>	
Power (P2) main pump:	3 HP
Main frequency:	60 Hz
Rated voltage:	3 x 208-230 V
Starting main:	electronically
Rated current of system:	24.9 A
<b>Controls:</b>	
Control type:	E
Operation unit:	CU323-3
<b>Tank:</b>	
Diaphragm tank:	No
<b>Others:</b>	
Net weight:	492 lb
Gross weight:	714 lb
Product range:	NAMREG
Custom tariff no.:	8413.70.2040

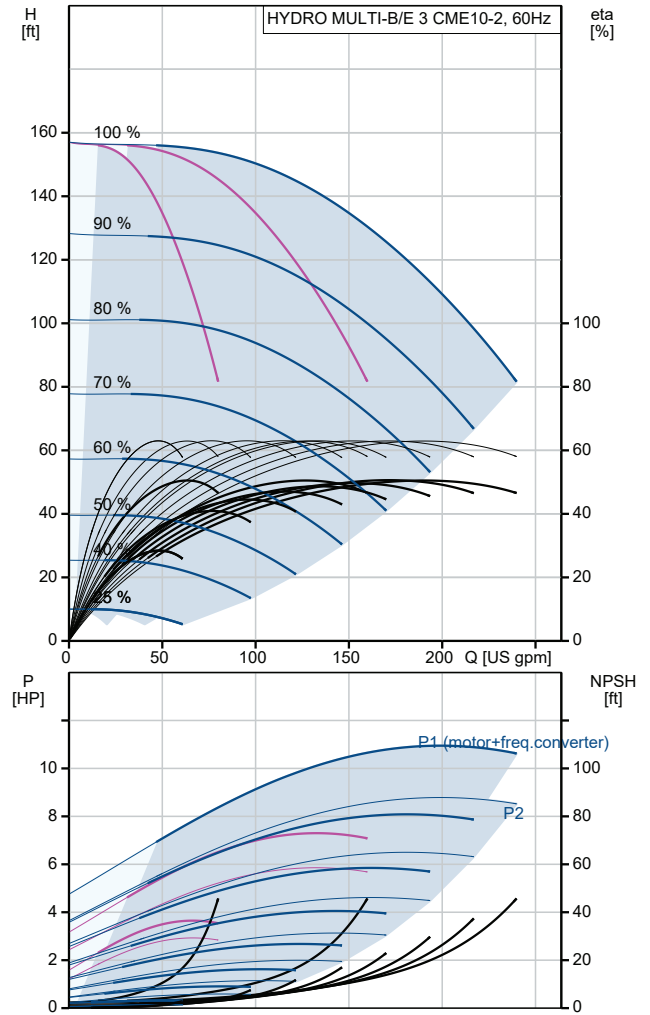


# 91149115 HYDRO MULTI-B/E 3 CME10-2 60 Hz

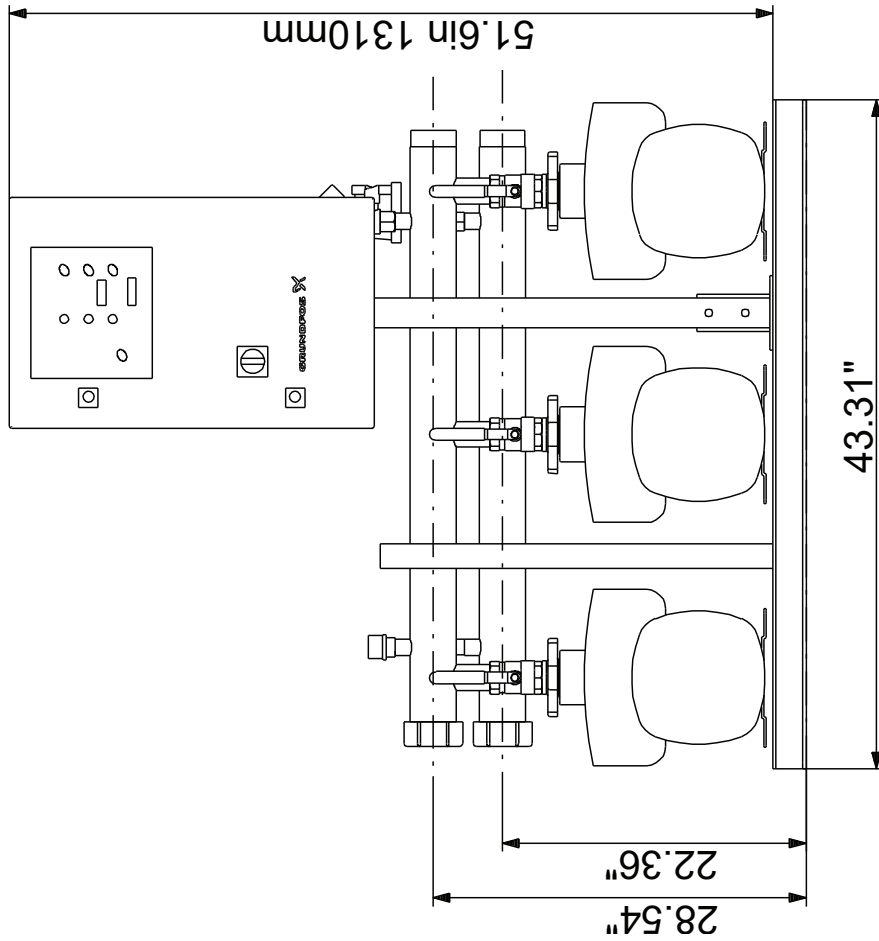
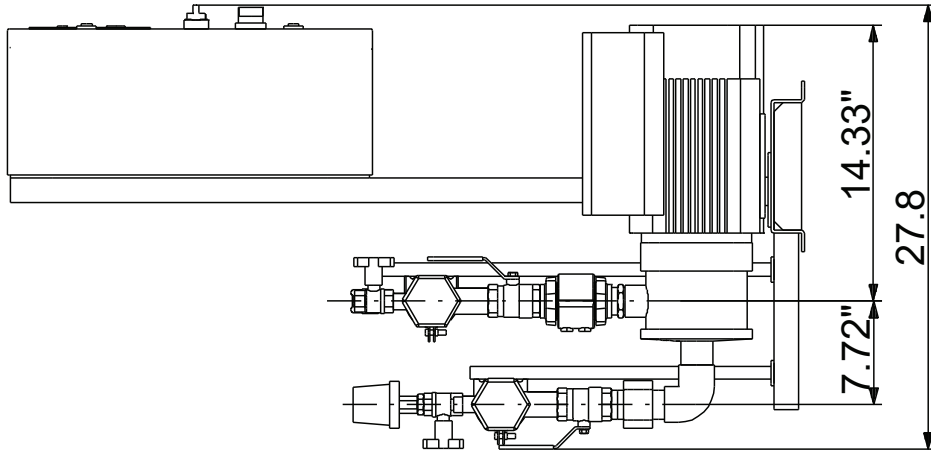


# 91149129 HYDRO MULTI-B/E 3 CME10-2 60 Hz

Description	Value
<b>General information:</b>	
Product name:	HYDRO MULTI-B/E 3 CME10-2
Product No.:	91149129
EAN:	5711499828475
<b>Technical:</b>	
Rated flow:	159 US gpm
Min flow system:	15.9 US gpm
Rated head:	128 ft
Head max:	150.9 ft
Main pump name:	CME10-2
Main pump Number:	98396737
Number of pumps:	3
Model:	A
<b>Materials:</b>	
Pump:	EN-GJL-200
Manifolds:	EN/DIN 1.4571/ AISI 316 TI
<b>Installation:</b>	
Maximum operating pressure:	145 psi
Pipe connection:	2.5NPT
<b>Liquid:</b>	
Pumped liquid:	Water
Liquid temperature range:	32 .. 140 °F
Liquid temperature during operation:	68 °F
Density:	62.29 lb/ft³
<b>Electrical data:</b>	
Power (P2) main pump:	3 HP
Main frequency:	60 Hz
Rated voltage:	3 x 460-480 V
Starting main:	electronically
Rated current of system:	12.8 A
<b>Controls:</b>	
Control type:	E
Operation unit:	CU323-3
<b>Tank:</b>	
Diaphragm tank:	No
<b>Others:</b>	
Net weight:	397 lb
Gross weight:	620 lb
Product range:	NAMREG
Custom tariff no.:	8413.70.2040

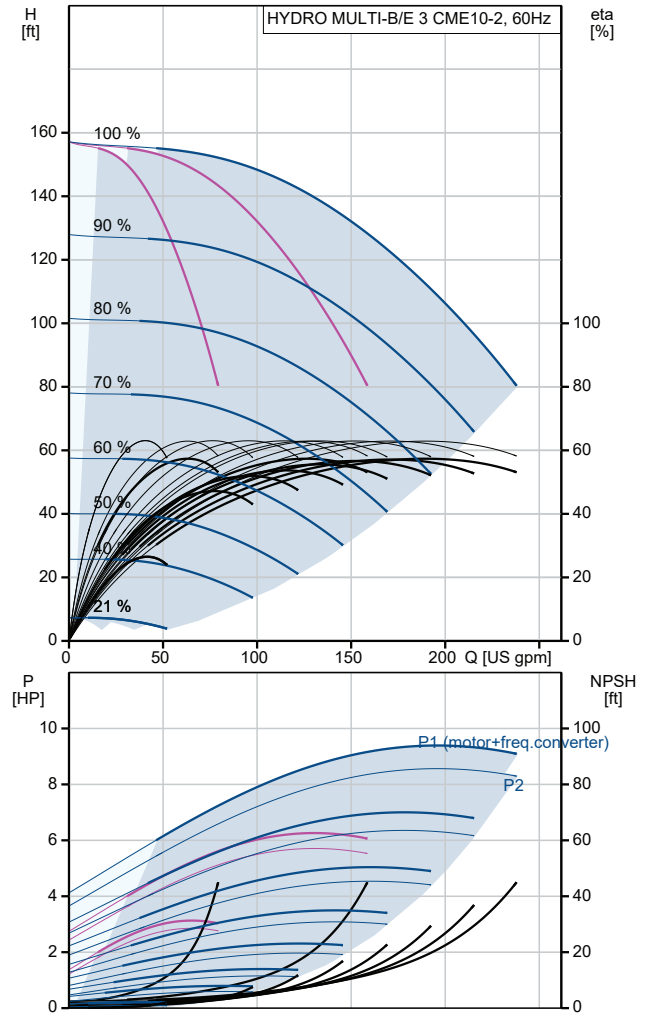


# 91149129 HYDRO MULTI-B/E 3 CME10-2 60 Hz

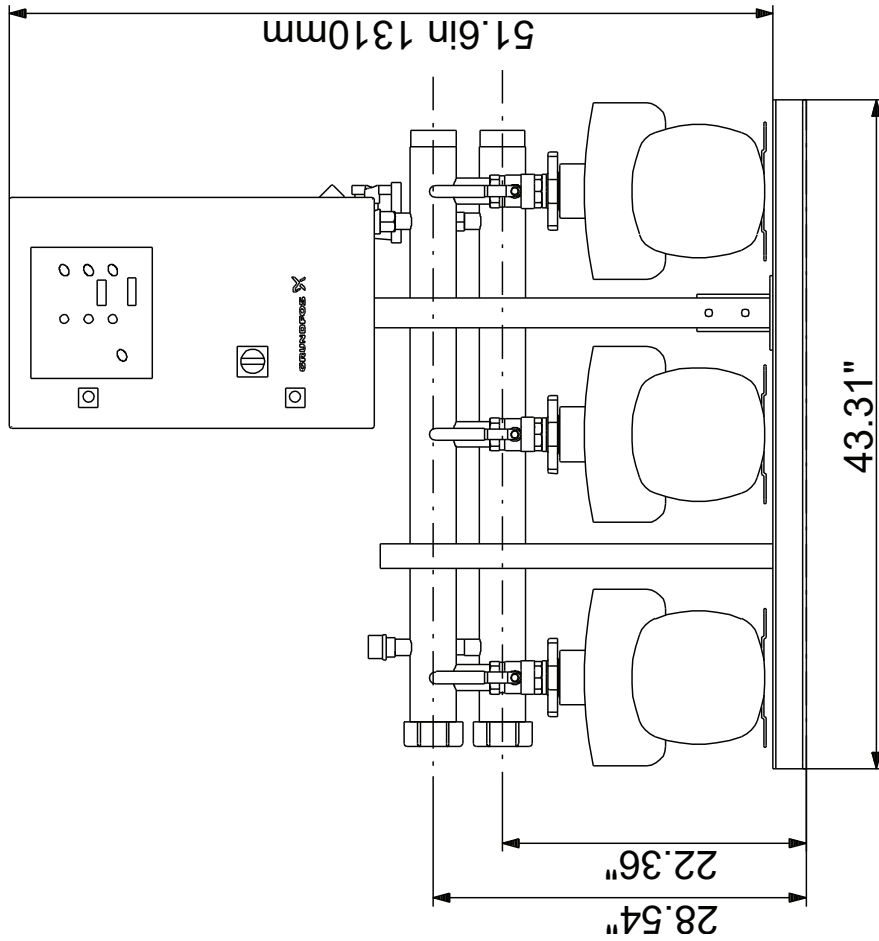
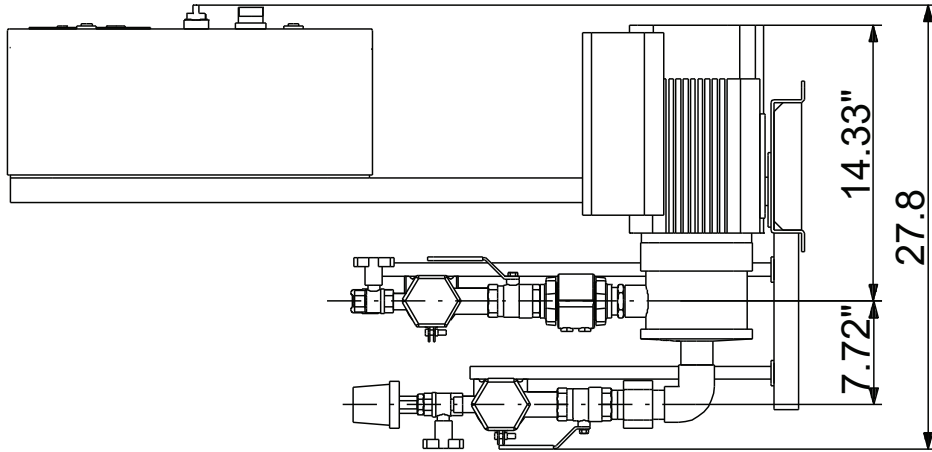


# 91149116 HYDRO MULTI-B/E 3 CME10-3 60 Hz

Description	Value
<b>General information:</b>	
Product name:	HYDRO MULTI-B/E 3 CME10-3
Product No.:	91149116
EAN:	5711490038675
<b>Technical:</b>	
Rated flow:	159 US gpm
Min flow system:	15.9 US gpm
Rated head:	191.3 ft
Head max:	224.7 ft
Main pump name:	CME10-3
Main pump Number:	98126058
Number of pumps:	3
Model:	A
<b>Materials:</b>	
Pump:	EN-GJL-200
Manifolds:	EN/DIN 1.4571/ AISI 316 TI
<b>Installation:</b>	
Maximum operating pressure:	145 psi
Pipe connection:	2.5NPT
<b>Liquid:</b>	
Pumped liquid:	Water
Liquid temperature range:	32 .. 140 °F
Liquid temperature during operation:	68 °F
Density:	62.29 lb/ft³
<b>Electrical data:</b>	
Power (P2) main pump:	5 HP
Main frequency:	60 Hz
Rated voltage:	3 x 208-230 V
Starting main:	electronically
Rated current of system:	40.2 A
<b>Controls:</b>	
Control type:	E
Operation unit:	CU323-3
<b>Tank:</b>	
Diaphragm tank:	No
<b>Others:</b>	
Net weight:	615 lb
Gross weight:	838 lb
Product range:	NAMREG
Custom tariff no.:	8413.70.2040

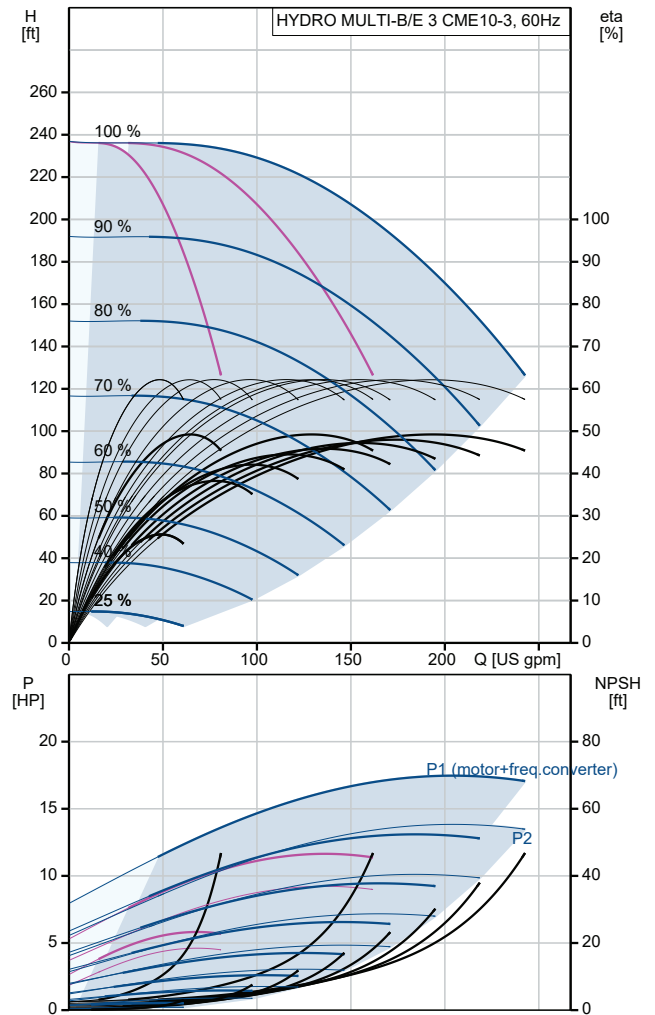


# 91149116 HYDRO MULTI-B/E 3 CME10-3 60 Hz

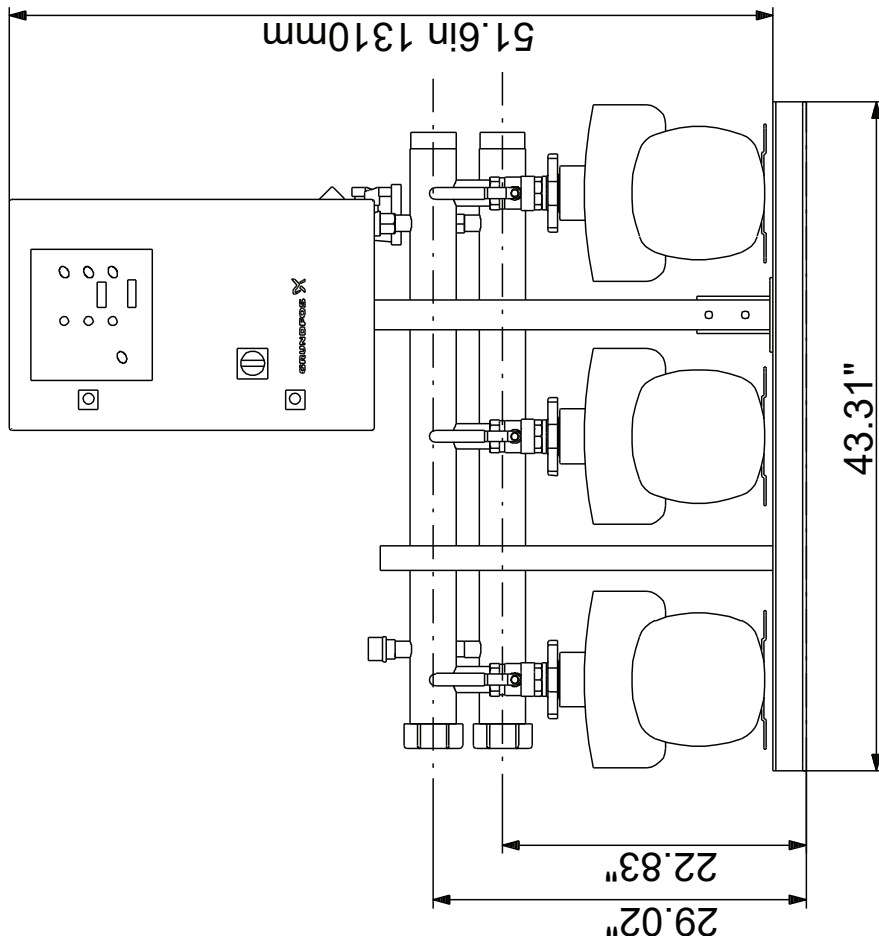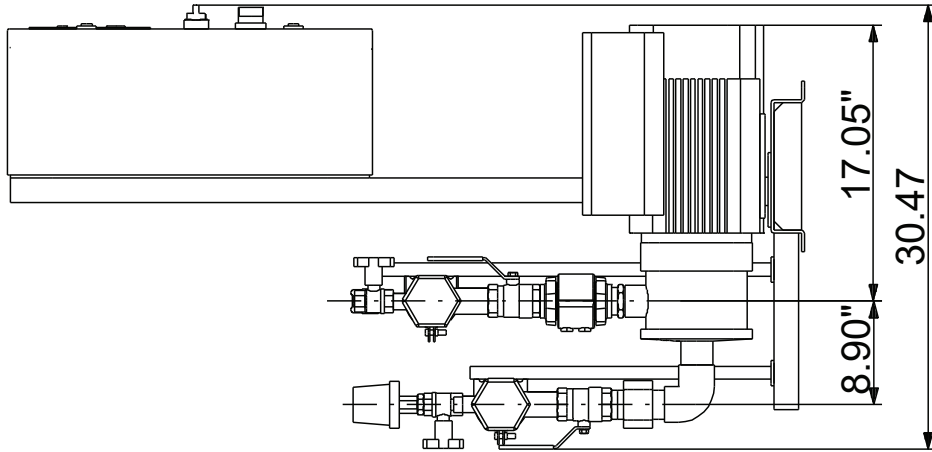



# 91149130 HYDRO MULTI-B/E 3 CME10-3 60 Hz

Description	Value
<b>General information:</b>	
Product name:	HYDRO MULTI-B/E 3 CME10-3
Product No.:	91149130
EAN:	5711490038804
<b>Technical:</b>	
Rated flow:	159 US gpm
Min flow system:	15.9 US gpm
Rated head:	191.3 ft
Head max:	224.7 ft
Main pump name:	CME10-3
Main pump Number:	99077769
Number of pumps:	3
Model:	A
<b>Materials:</b>	
Pump:	EN-GJL-200
Manifolds:	EN/DIN 1.4571/ AISI 316 TI
<b>Installation:</b>	
Maximum operating pressure:	145 psi
Pipe connection:	2.5NPT
<b>Liquid:</b>	
Pumped liquid:	Water
Liquid temperature range:	32 .. 140 °F
Liquid temperature during operation:	68 °F
Density:	62.29 lb/ft³
<b>Electrical data:</b>	
Power (P2) main pump:	5 HP
Main frequency:	60 Hz
Rated voltage:	3 x 460-480 V
Starting main:	electronically
Rated current of system:	18.3 A
<b>Controls:</b>	
Control type:	E
Operation unit:	CU323-3
<b>Tank:</b>	
Diaphragm tank:	No
<b>Others:</b>	
Net weight:	585 lb
Gross weight:	808 lb
Product range:	NAMREG
Custom tariff no.:	8413.70.2040

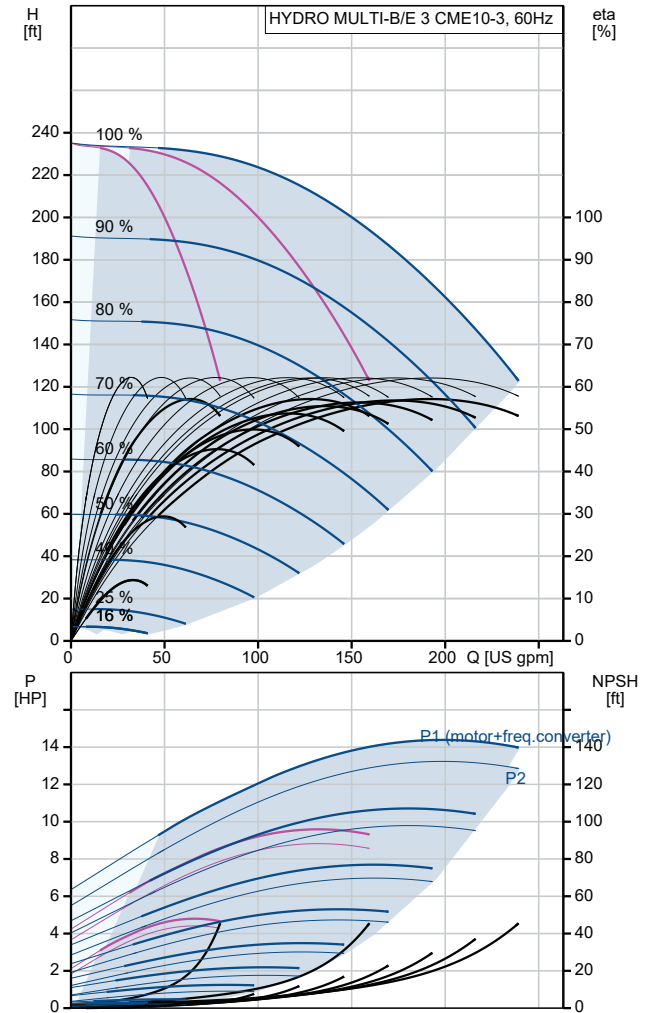




# 91149130 HYDRO MULTI-B/E 3 CME10-3 60 Hz

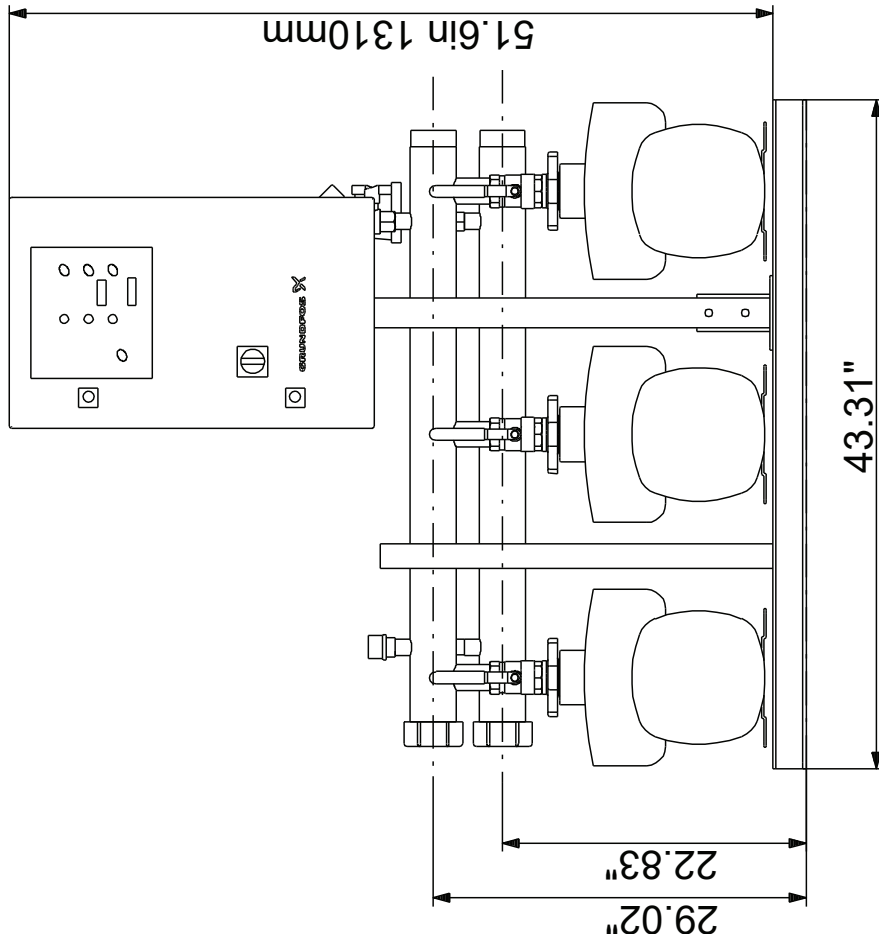
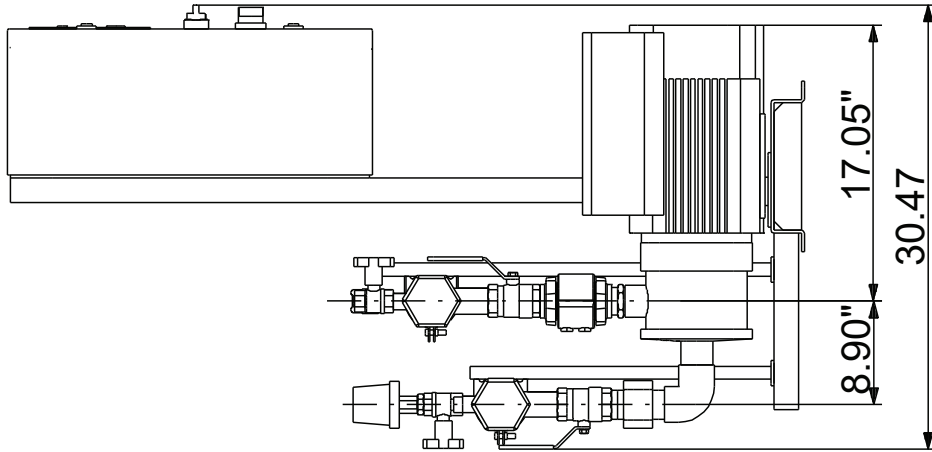


# 91149120 HYDRO MULTI-B/E 3 CME15-1 60 Hz

Description	Value
<b>General information:</b>	
Product name:	HYDRO MULTI-B/E 3 CME15-1
Product No.:	91149120
EAN:	5711490038712
<b>Technical:</b>	
Rated flow:	269 US gpm
Min flow system:	26.4 US gpm
Rated head:	69.56 ft
Head max:	83.99 ft
Main pump name:	CME15-1
Main pump Number:	98126320
Number of pumps:	3
Model:	A
<b>Materials:</b>	
Pump:	EN-GJL-200
Manifolds:	EN/DIN 1.4571/ AISI 316 TI
<b>Installation:</b>	
Maximum operating pressure:	145 psi
Pipe connection:	4ANSI
<b>Liquid:</b>	
Pumped liquid:	Water
Liquid temperature range:	32 .. 140 °F
Liquid temperature during operation:	68 °F
Density:	62.29 lb/ft³
<b>Electrical data:</b>	
Power (P2) main pump:	3 HP
Main frequency:	60 Hz
Rated voltage:	3 x 208-230 V
Starting main:	electronically
Rated current of system:	24.9 A
<b>Controls:</b>	
Control type:	E
Operation unit:	CU323-3
<b>Tank:</b>	
Diaphragm tank:	No
<b>Others:</b>	
Net weight:	560 lb
Gross weight:	783 lb
Product range:	NAMREG
Custom tariff no.:	8413.70.2040

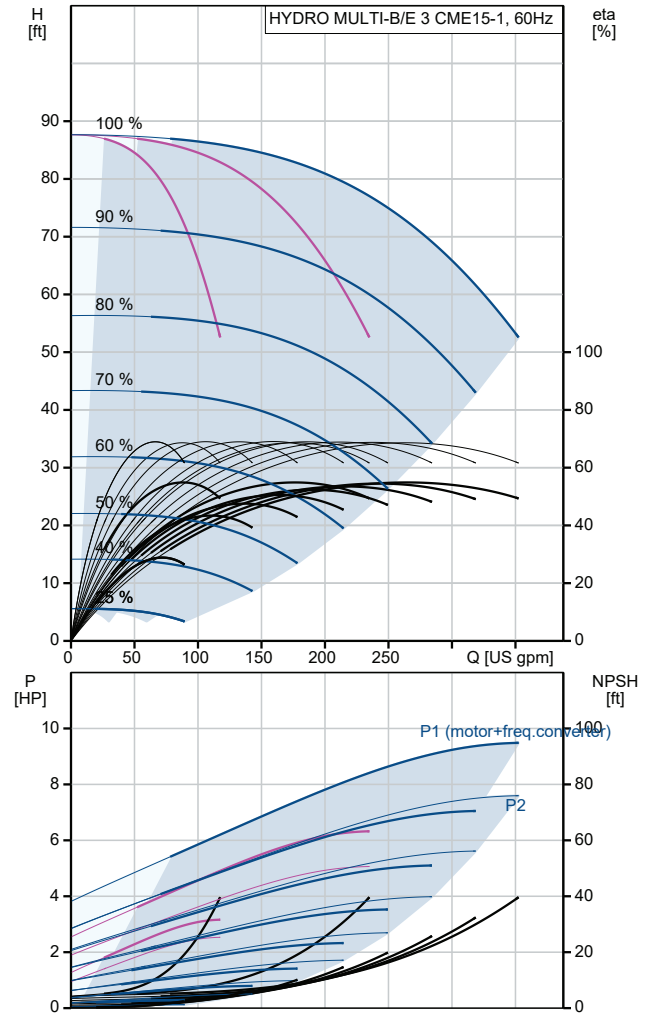


# 91149120 HYDRO MULTI-B/E 3 CME15-1 60 Hz

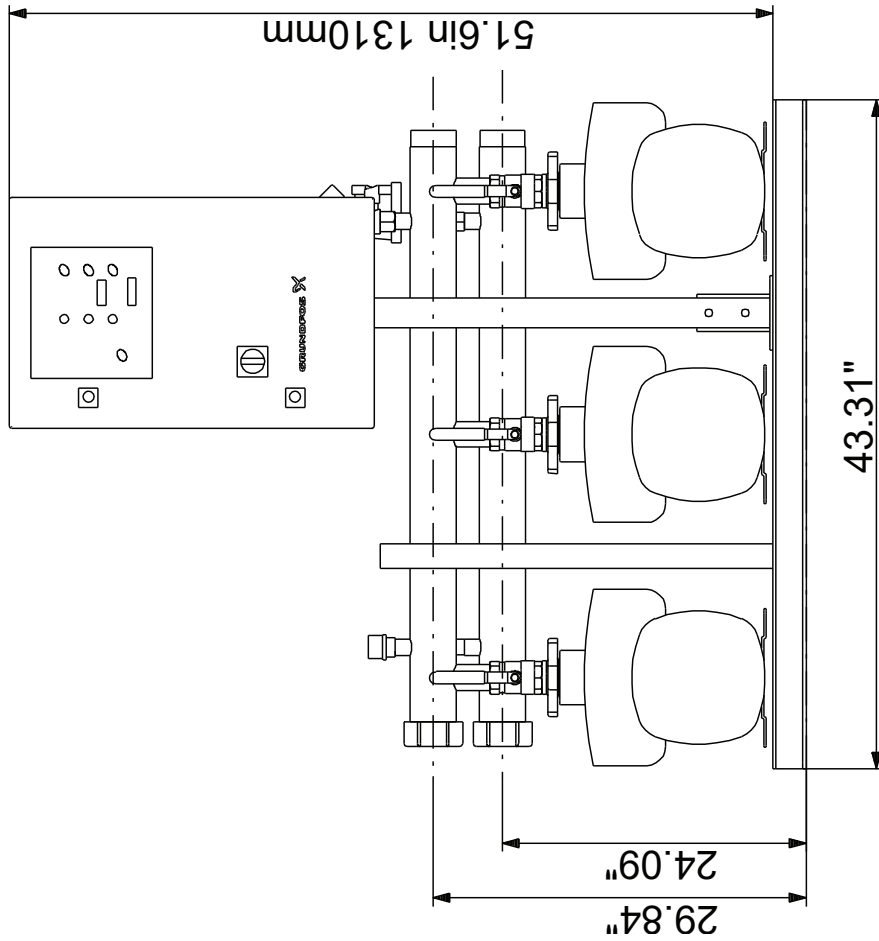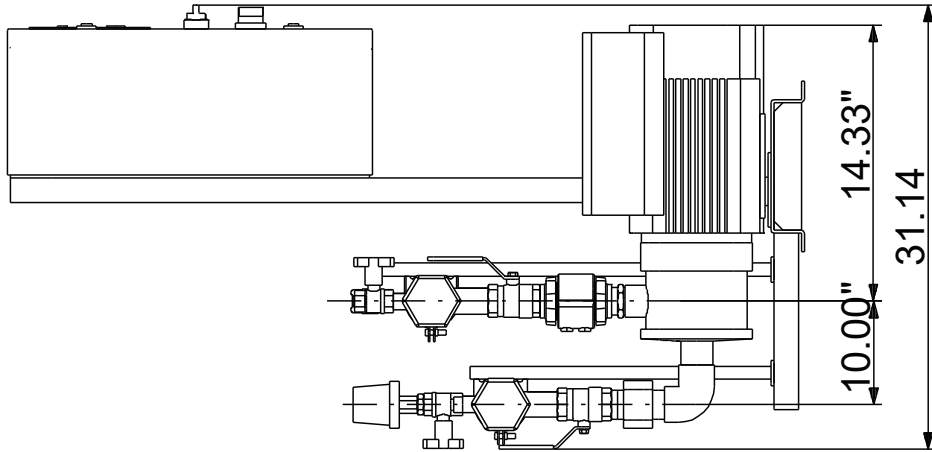


# 91149134 HYDRO MULTI-B/E 3 CME15-1 60 Hz

Description	Value
<b>General information:</b>	
Product name:	HYDRO MULTI-B/E 3 CME15-1
Product No.:	91149134
EAN:	5711490041415
<b>Technical:</b>	
Rated flow:	269 US gpm
Min flow system:	26.4 US gpm
Rated head:	69.56 ft
Head max:	83.99 ft
Main pump name:	CME15-1
Main pump Number:	98396746
Number of pumps:	3
Model:	A
<b>Materials:</b>	
Pump:	EN-GJL-200
Manifolds:	EN/DIN 1.4571/ AISI 316 TI
<b>Installation:</b>	
Maximum operating pressure:	145 psi
Pipe connection:	4ANSI
<b>Liquid:</b>	
Pumped liquid:	Water
Liquid temperature range:	32 .. 140 °F
Liquid temperature during operation:	68 °F
Density:	62.29 lb/ft³
<b>Electrical data:</b>	
Power (P2) main pump:	3 HP
Main frequency:	60 Hz
Rated voltage:	3 x 460-480 V
Starting main:	electronically
Rated current of system:	12.8 A
<b>Controls:</b>	
Control type:	E
Operation unit:	CU323-3
<b>Tank:</b>	
Diaphragm tank:	No
<b>Others:</b>	
Net weight:	467 lb
Gross weight:	690 lb
Product range:	NAMREG
Custom tariff no.:	8413.70.2040

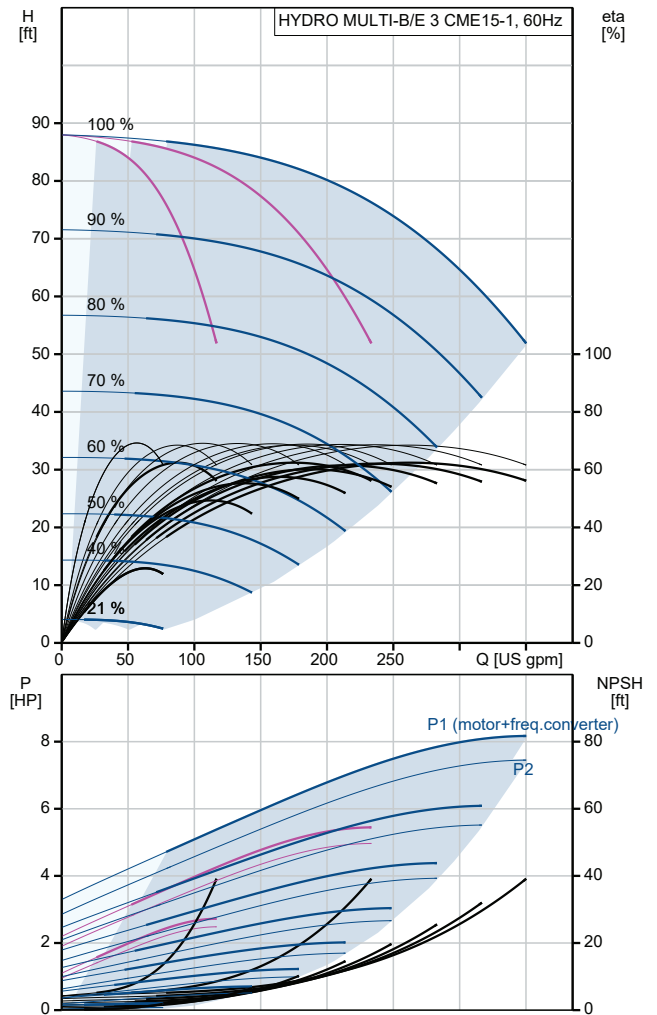


# 91149134 HYDRO MULTI-B/E 3 CME15-1 60 Hz


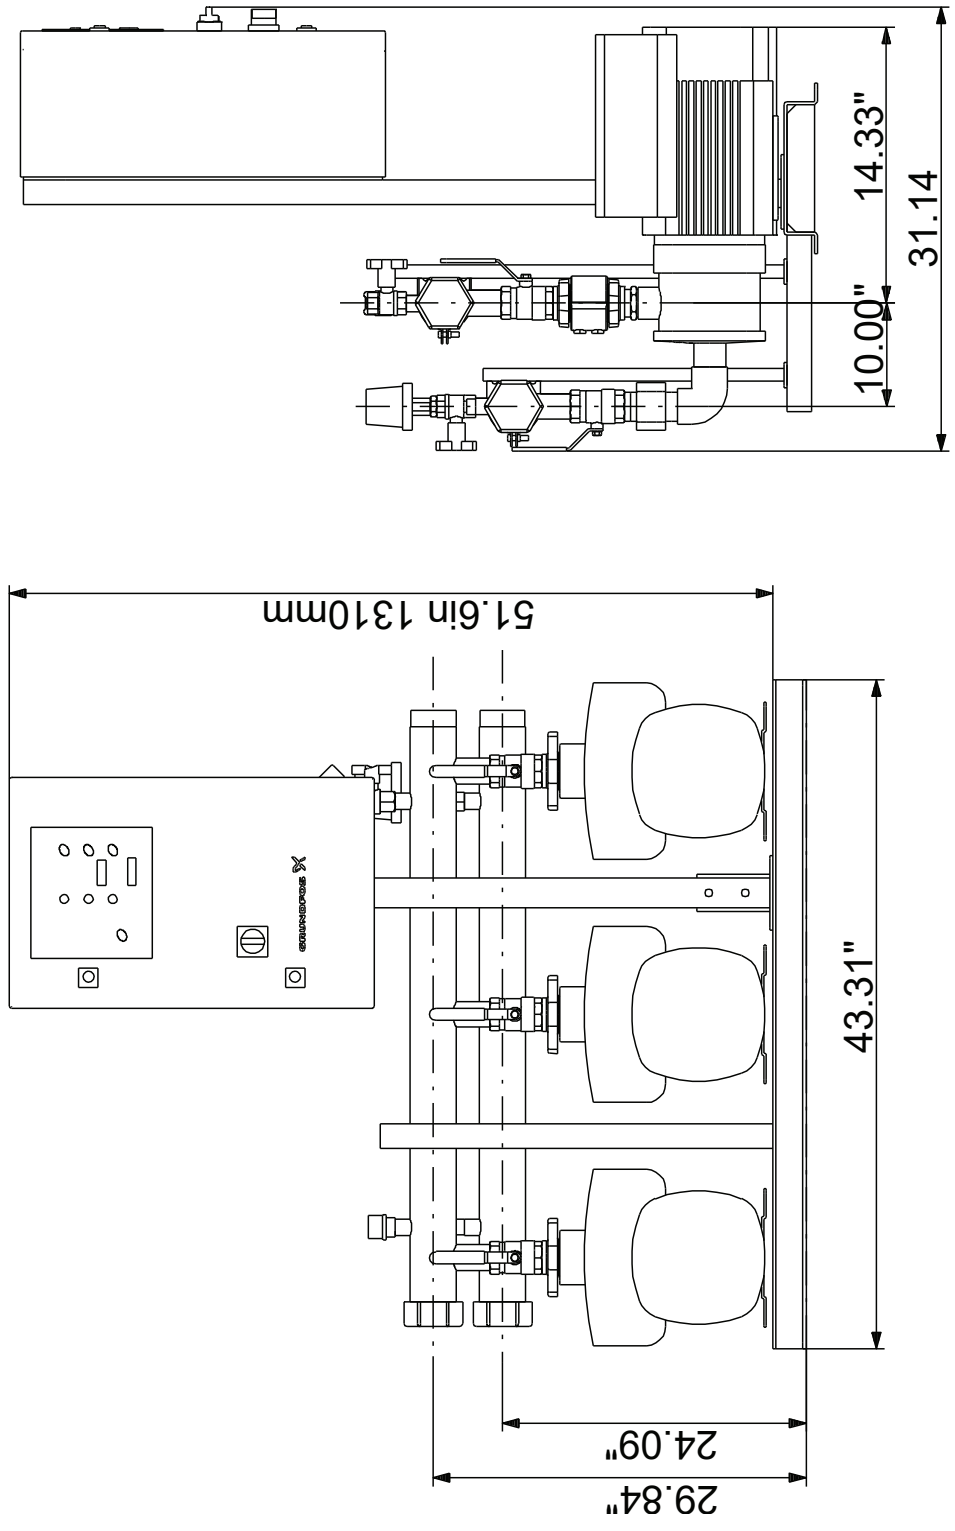


# 91149121 HYDRO MULTI-B/E 3 CME15-2 60 Hz

Description	Value
<b>General information:</b>	
Product name:	HYDRO MULTI-B/E 3 CME15-2
Product No.:	91149121
EAN:	5711490038729
<b>Technical:</b>	
Rated flow:	269 US gpm
Min flow system:	26.4 US gpm
Rated head:	140.1 ft
Head max:	162.7 ft
Main pump name:	CME15-2
Main pump Number:	98126082
Number of pumps:	3
Model:	A
<b>Materials:</b>	
Pump:	EN-GJL-200
Manifolds:	EN/DIN 1.4571/ AISI 316 TI
<b>Installation:</b>	
Maximum operating pressure:	145 psi
Pipe connection:	4ANSI
<b>Liquid:</b>	
Pumped liquid:	Water
Liquid temperature range:	32 .. 140 °F
Liquid temperature during operation:	68 °F
Density:	62.29 lb/ft³
<b>Electrical data:</b>	
Power (P2) main pump:	5 HP
Main frequency:	60 Hz
Rated voltage:	3 x 208-230 V
Starting main:	electronically
Rated current of system:	59.1 A
<b>Controls:</b>	
Control type:	E
Operation unit:	CU323-3
<b>Tank:</b>	
Diaphragm tank:	No
<b>Others:</b>	
Net weight:	684 lb
Gross weight:	906 lb
Product range:	NAMREG
Custom tariff no.:	8413.70.2040

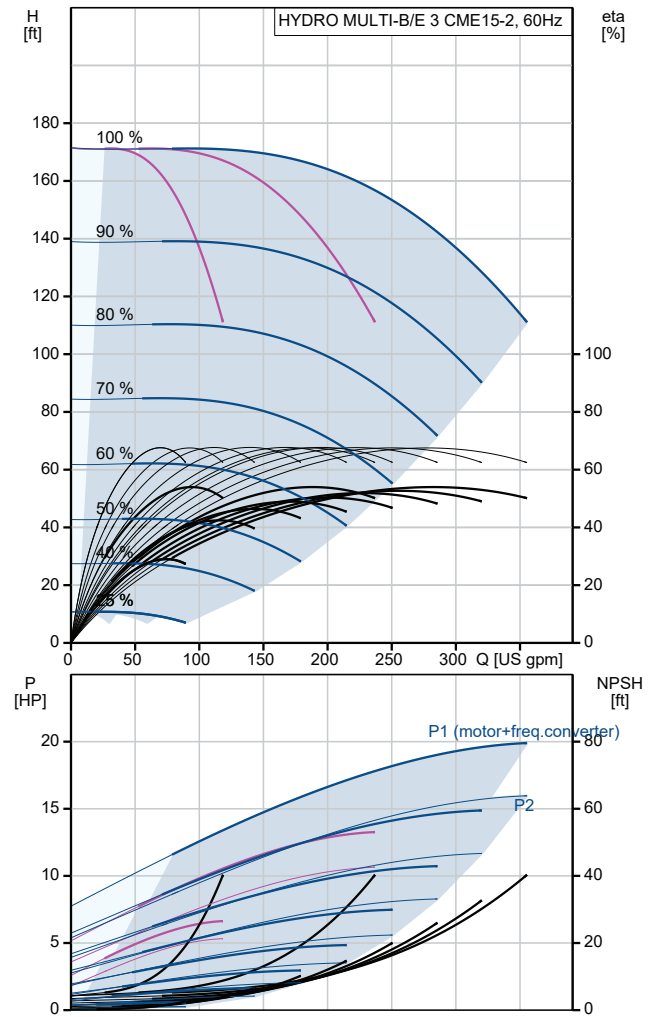


# 91149121 HYDRO MULTI-B/E 3 CME15-2 60 Hz

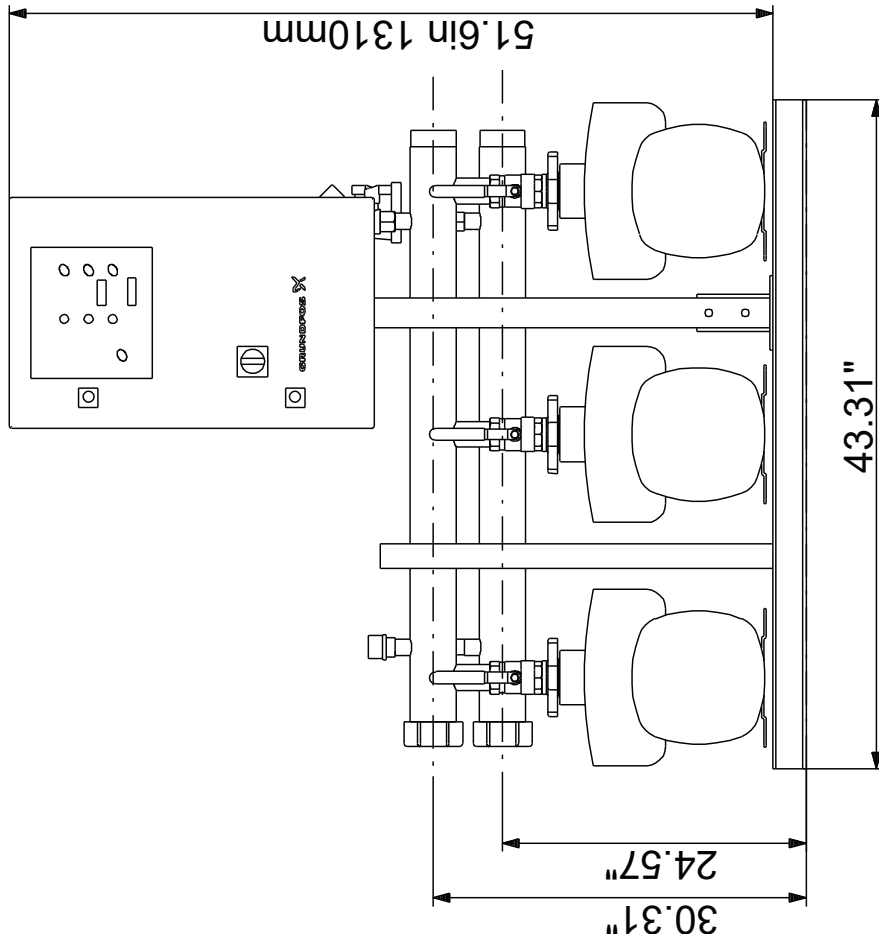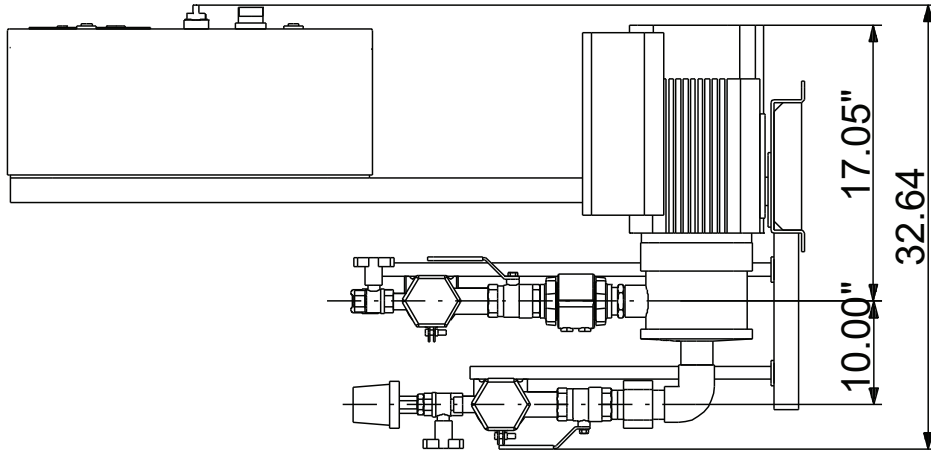



# 91149135 HYDRO MULTI-B/E 3 CME15-2 60 Hz

Description	Value
<b>General information:</b>	
Product name:	HYDRO MULTI-B/E 3 CME15-2
Product No.:	91149135
EAN:	5711490041446
<b>Technical:</b>	
Rated flow:	269 US gpm
Min flow system:	26.4 US gpm
Rated head:	140.1 ft
Head max:	162.7 ft
Main pump name:	CME15-2
Main pump Number:	99077772
Number of pumps:	3
Model:	A
<b>Materials:</b>	
Pump:	EN-GJL-200
Manifolds:	EN/DIN 1.4571/ AISI 316 TI
<b>Installation:</b>	
Maximum operating pressure:	145 psi
Pipe connection:	4ANSI
<b>Liquid:</b>	
Pumped liquid:	Water
Liquid temperature range:	32 .. 140 °F
Liquid temperature during operation:	68 °F
Density:	62.29 lb/ft³
<b>Electrical data:</b>	
Power (P2) main pump:	5 HP
Main frequency:	60 Hz
Rated voltage:	3 x 460-480 V
Starting main:	electronically
Rated current of system:	18.3 A
<b>Controls:</b>	
Control type:	E
Operation unit:	CU323-3
<b>Tank:</b>	
Diaphragm tank:	No
<b>Others:</b>	
Net weight:	654 lb
Gross weight:	877 lb
Product range:	NAMREG
Custom tariff no.:	8413.70.2040

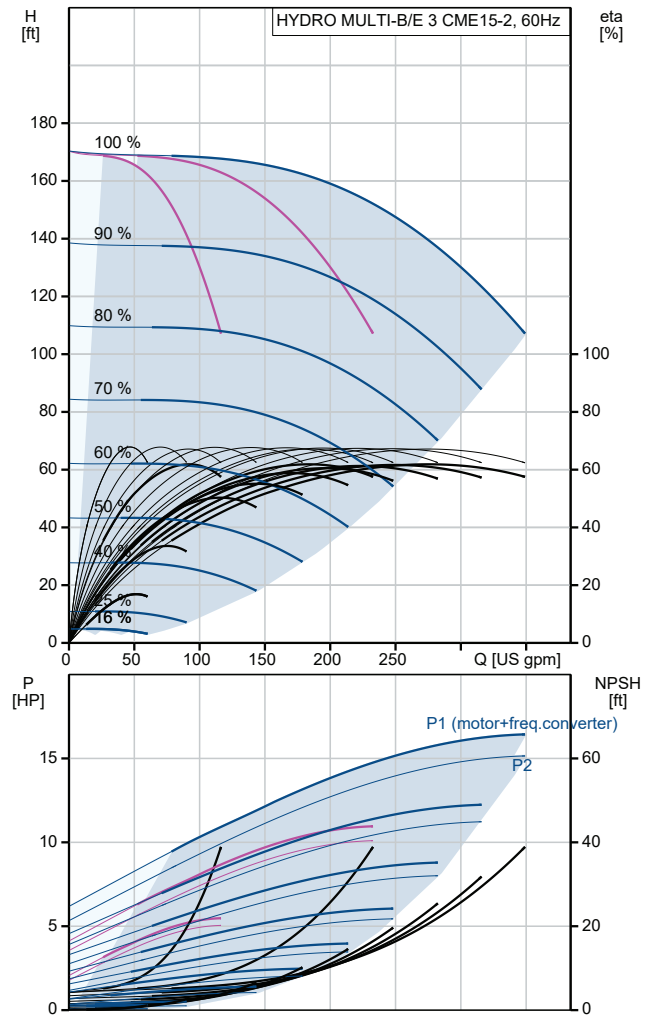




# 91149135 HYDRO MULTI-B/E 3 CME15-2 60 Hz

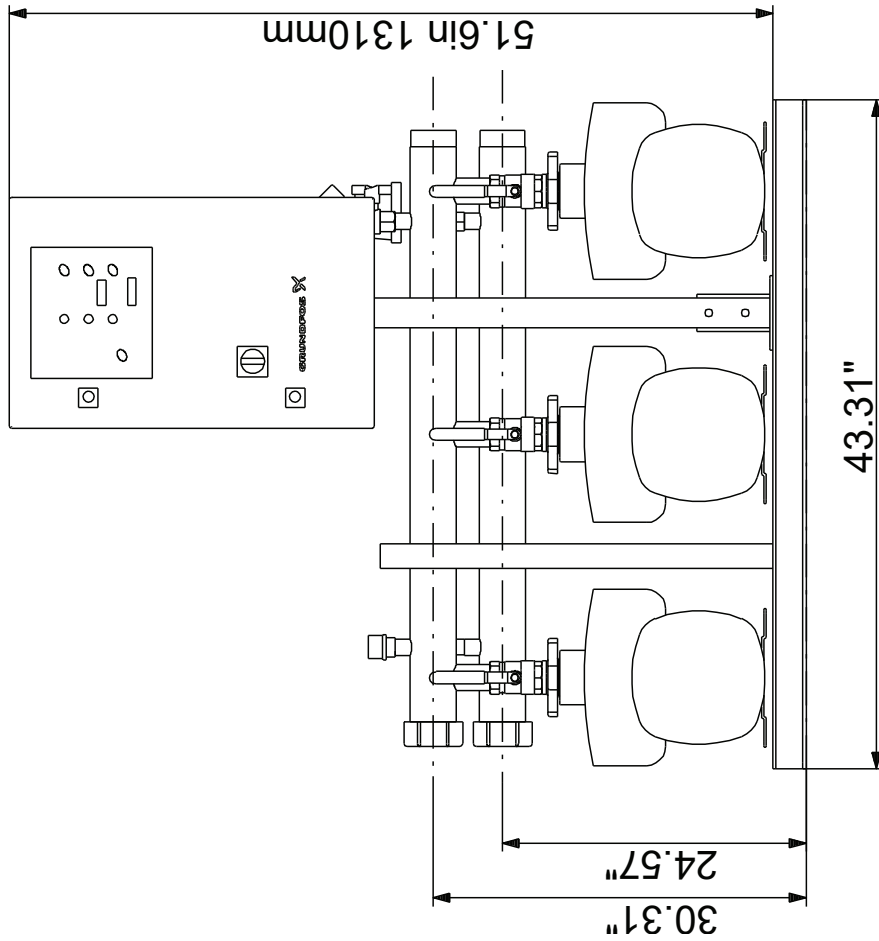
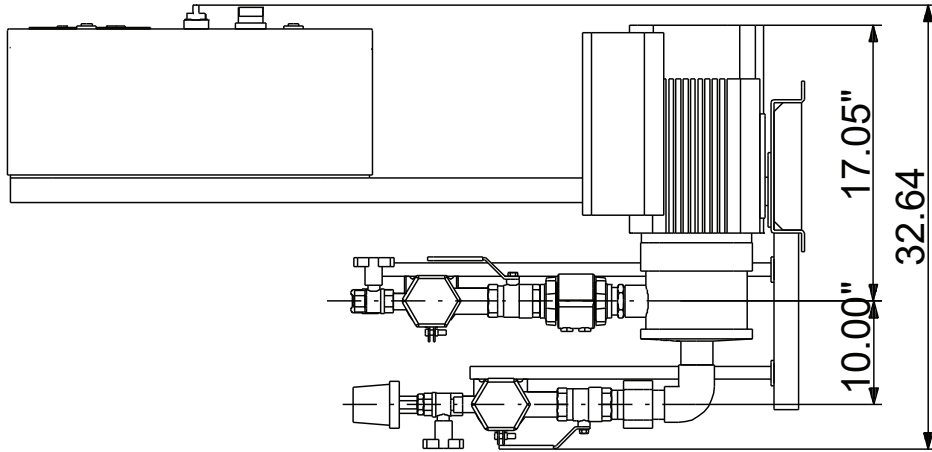


# 91149122 HYDRO MULTI-B/E 3 CME15-3 60 Hz

Description	Value
<b>General information:</b>	
Product name:	HYDRO MULTI-B/E 3 CME15-3
Product No.:	91149122
EAN:	5711490041316
<b>Technical:</b>	
Rated flow:	269 US gpm
Min flow system:	26.4 US gpm
Rated head:	211 ft
Head max:	241.5 ft
Main pump name:	CME15-3
Main pump Number:	98126476
Number of pumps:	3
Model:	A
<b>Materials:</b>	
Pump:	EN-GJL-200
Manifolds:	EN/DIN 1.4571/ AISI 316 TI
<b>Installation:</b>	
Maximum operating pressure:	145 psi
Pipe connection:	4ANSI
<b>Liquid:</b>	
Pumped liquid:	Water
Liquid temperature range:	32 .. 140 °F
Liquid temperature during operation:	68 °F
Density:	62.29 lb/ft³
<b>Electrical data:</b>	
Power (P2) main pump:	7.51 HP
Main frequency:	60 Hz
Rated voltage:	3 x 208-230 V
Starting main:	electronically
Rated current of system:	59.1 A
<b>Controls:</b>	
Control type:	E
Operation unit:	CU323-3
<b>Tank:</b>	
Diaphragm tank:	No
<b>Others:</b>	
Net weight:	712 lb
Gross weight:	935 lb
Product range:	NAMREG
Custom tariff no.:	8413.70.2040

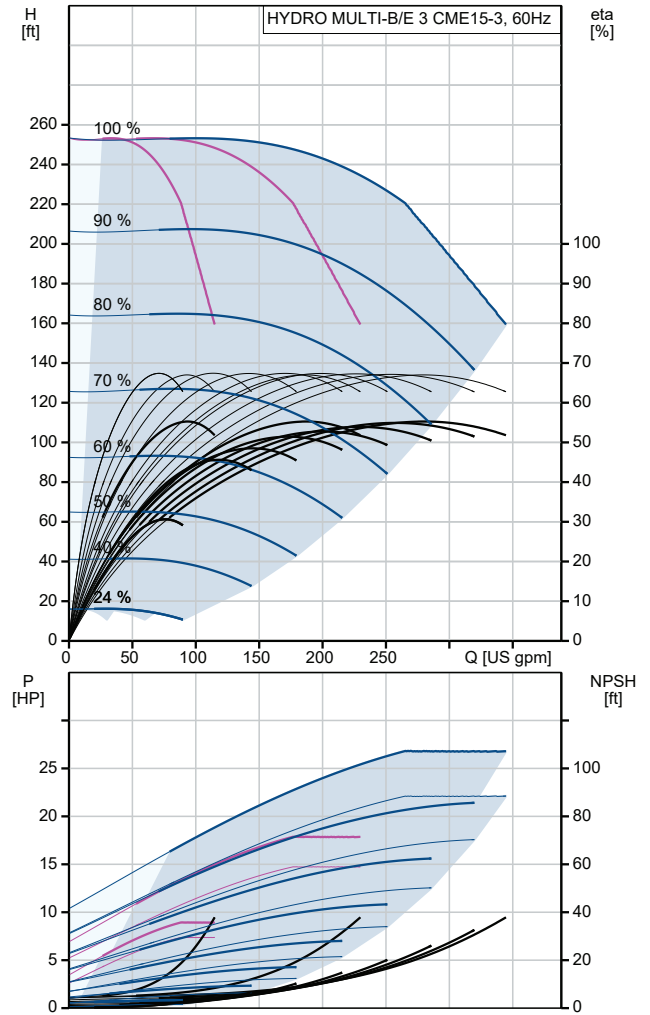


# 91149122 HYDRO MULTI-B/E 3 CME15-3 60 Hz

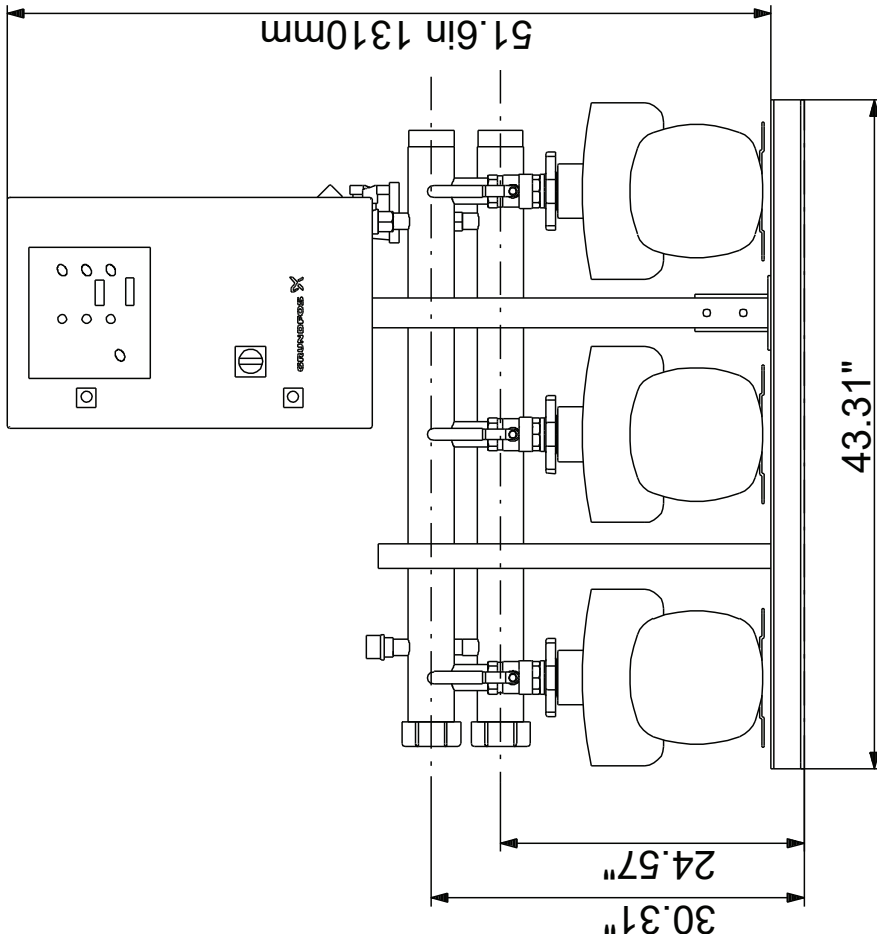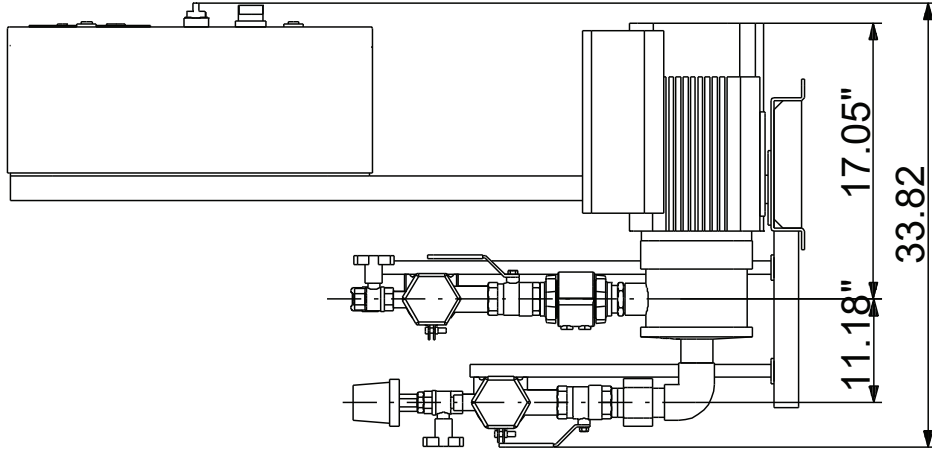

# 91149136 HYDRO MULTI-B/E 3 CME15-3 60 Hz

Description	Value
<b>General information:</b>	
Product name:	HYDRO MULTI-B/E 3 CME15-3
Product No.:	91149136
EAN:	5711499789684
<b>Technical:</b>	
Rated flow:	269 US gpm
Min flow system:	26.4 US gpm
Rated head:	211 ft
Head max:	241.5 ft
Main pump name:	CME15-3
Main pump Number:	99077774
Number of pumps:	3
Model:	A
<b>Materials:</b>	
Pump:	EN-GJL-200
Manifolds:	EN/DIN 1.4571/ AISI 316 TI
<b>Installation:</b>	
Maximum operating pressure:	145 psi
Pipe connection:	4ANSI
<b>Liquid:</b>	
Pumped liquid:	Water
Liquid temperature range:	32 .. 140 °F
Liquid temperature during operation:	68 °F
Density:	62.29 lb/ft³
<b>Electrical data:</b>	
Power (P2) main pump:	7.51 HP
Main frequency:	60 Hz
Rated voltage:	3 x 440-480 V
Starting main:	electronically
Rated current of system:	26.7 A
<b>Controls:</b>	
Control type:	E
Operation unit:	CU323-3
<b>Tank:</b>	
Diaphragm tank:	No
<b>Others:</b>	
Net weight:	683 lb
Gross weight:	906 lb
Product range:	NAMREG
Custom tariff no.:	8413.70.2040

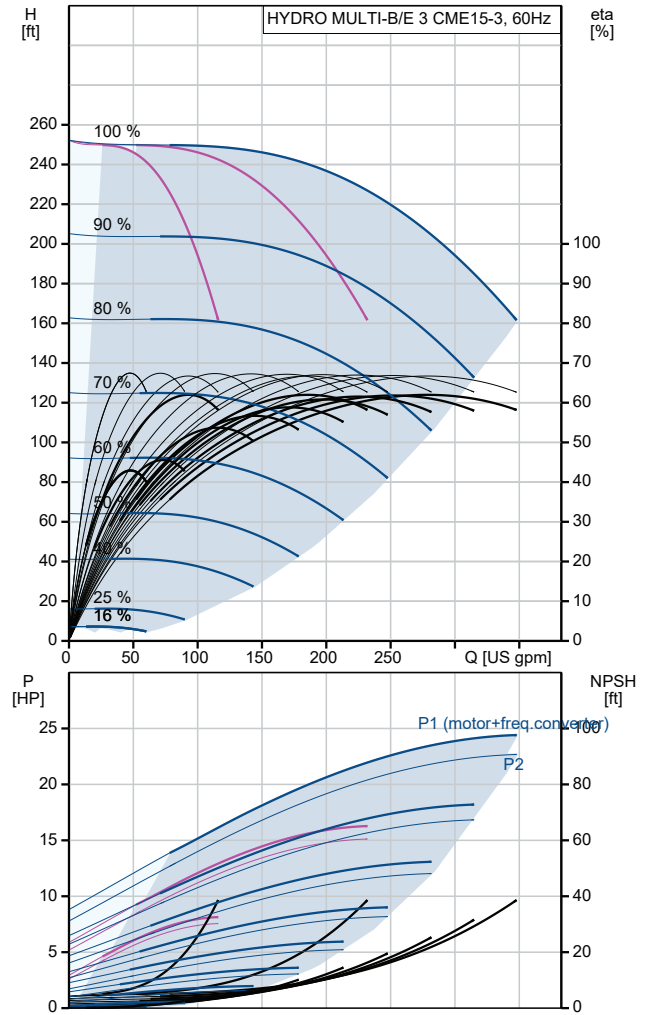

# 91149136 HYDRO MULTI-B/E 3 CME15-3 60 Hz

