



# Heating Service Products

Protective maintenance for steam and hot water systems.



**RECTORSEAL**  
A CSW Industrials Company

## 8-Way™

### BOILER WATER CONDITIONER

◀ CONDITIONNEUR D'EAU DE CHAUDIÈRE

- Build alkalinity
- Control pH
- Inhibit corrosion
- Sure-cure color indicator

PROTECTIVE MAINTENANCE FOR STEAM & HOT WATER HEATING SYSTEMS

1 qt. 946 l

**RECTORSEAL**  
A CSW Industrials Company

## Sootspray™

### BURNER SOOT REMOVER

◀ DÉCAPANT DE SUIE DE BRÛLEUR

- Prevent insulating soot from forming
- Improve burner efficiency

CONTINUOUS CATALYTIC ACTION KEEPS BURNER SURFACE SOOT FREE

NET WT. 14 OZ. 398 g

**RECTORSEAL**  
A CSW Industrials Company

## Odorgon™

### FUEL OIL ABSORBER

◀ ABSORBEUR DE MAZOUT

- Eliminate odor
- Remove stains
- Mild fragrance

ABSORB FUEL OIL RESIDUE REMAINING AFTER LEAK OR SPILL CLEANUP

NET WT. 14 OZ. 398 g

**RECTORSEAL**

HEATING CHEMICALS

Performance. Efficiency. Protection.



Burner



Boiler



Fuel Oil

**3YR**  
LIMITED WARRANTY

Protection for today's high efficiency heating systems.

Extended life of older systems.



Action videos and full details @ [rectorseal.com/heating](http://rectorseal.com/heating)



## FUEL OIL DEODORIZERS & ABSORBENTS

### Odorgon™ Powder

Code	Description	Qty
68512	1 lb.	12
68514	2 lbs.	12

#### FEATURES

- Leaves pleasant scent
- Non-explosive / non-flammable

### Kills odors and absorbs oil

**APPLICATION** • Handy for cleaning up after fuel oil spills and leaks • Sifter top for controlled economical usage and clean storage

#### RECOMMENDED FOR

- Eliminating fuel oil odor and stains on floors and horizontal surfaces



### Odorgon™ Spray

Code	Description	Qty
68516	14 oz. aerosol	12

#### FEATURES

- Non-lingering, mild scent
- Non-flammable

**WARNING:** This product can expose you to chemicals including Methyl Isobutyl Ketone (MIBK), which is known to the State of California to cause cancer and birth defects or other reproductive harm. For more information, go to [www.P65Warnings.ca.gov](http://www.P65Warnings.ca.gov).

### Kills odors and absorbs oil

**APPLICATION** • Kills fuel oil odor in hard to reach corners and vertical surfaces

#### RECOMMENDED FOR

- Neutralizing fuel oil odor remaining after leak or spill cleanup





## SOOT REMOVERS

### Sootspray™

Code	Description	Qty
68342	14 oz. aerosol	12


#### FEATURES

- Contains no lead
- Cuts vacuum time by 50-100%

The original aerosol soot remover

**APPLICATION** • Prevents insulating soot from forming • Continuous safe catalytic action keeps burner surface soot free  
 • Improve burner efficiency • Reaches where vacuum cleaners cannot

**RECOMMENDED FOR**  
 • Oil & gas-fired burners



## BOILER TREATMENTS

Water treatments & sealants for steam and hot water systems

### Surgemaster™

Code	Description	Qty
68742	5.3 oz.	12

#### FEATURES

- Will not damage seals and gaskets
- Inhibits corrosion
- No petroleum distillates
- Sure-cure color indicator

**WARNING:** This product can expose you to chemicals including Silica, which is known to the State of California to cause cancer. For more information, go to [www.P65Warnings.ca.gov](http://www.P65Warnings.ca.gov).

Boiler water treatment

**APPLICATION** • Prevents priming and surging in steam heating systems  
 • Precipitates impurities and promotes efficiency • Sure-cure color indicator tints boiler water to take the guesswork out of treatment dosage  
 • Pour into boiler access point.

**RECOMMENDED FOR**  
 • Steam heating systems





## BOILER TREATMENTS

Water treatments & sealants for steam and hot water systems

### 8-Way™

Water treatment for steam & hot water systems

Code	Description	Qty
68712	1 qt.	12
68714	1 gal.	4


#### FEATURES

- Will not damage seals and gaskets
- Non-chromate; biodegradable\*
- No petroleum distillates
- Sure-cure color indicator

\* Contains the best available biodegradable surfactants and detergents.

**APPLICATION** • Builds alkalinity • Controls ph  
 • Removes sludge • Removes rust scale  
 • Inhibits boiler corrosion • Inhibits steam line corrosion • Prevents oxygen pitting • Inhibits lime scale • Prevents surging and foaming  
 • Sure-cure color indicator tints boiler water to take the guesswork out of treatment dosage • Pour directly into boiler or pump into drain valve using force pump.

**RECOMMENDED FOR**  
 • Protective maintenance for steam and hot water systems.

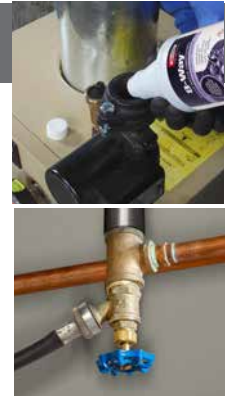

▲ Force pump drain line injection

### Surgex™

Inhibits scale and corrosion

Code	Description	Qty
68752	1-½ oz.	20

#### FEATURES

- Economical
- Concentrated
- Sure-cure color indicator

**APPLICATION** • Stops active surging in steam and hot water boilers.  
 • Sure-cure color indicator tints boiler water to take the guesswork out of treatment dosage • Pour into boiler access point.

**RECOMMENDED FOR**  
 • Steam and hot water systems





## LEAK LOCATORS

### Better Bubble™

Code	Description	Qty
65554	8 oz. - dauber top	12
65432	32 oz. - trigger spray	12
65273	1 gal.	4

#### FEATURES

- Fast acting
- Long lasting
- Easy to see bubbles
- Continuous bubbling

### Gas leak locator

**APPLICATION** • Thick formula pinpoints the smallest natural gas, LPG and A/C refrigerant leaks with well defined elastic bubbles that stand up under pressure and windy conditions • Use on surface temperatures from 20° F to 250° F

**RECOMMENDED FOR** • All types of pipe, tubing, valves, tanks, pressure vessels, condenser / evaporator coils, refrigeration coils, and many other similar applications



### RectorSeek™ Low-Temp

Code	Description	Qty
61273	1 gal.	4

#### FEATURES

- Longer bubbling action
- Spray application
- Easy to apply

### Low temperature leak locator

**APPLICATION** • Leak locator for use on pipes or tanks containing gases at low temperatures • Effective from -35° F to 200° F

**RECOMMENDED FOR** • All types of pipe (except CPVC), tubing, valves, cylinders, tanks, pressure vessels, condenser / evaporator coils, refrigeration coils and many other similar applications



### RectorSeek™ Mid-Temp

Code	Description	Qty
60273	1 gal.	4

#### FEATURES

- Longer bubbling action
- spray application
- Easy to apply

### Mid temperature leak locator

**APPLICATION** • Leak locator for use at normal temperature on pipe or tanks that contain gases • Can be used on oxygen, air or gas at temperatures between 40° F to 200° F

**RECOMMENDED FOR** • All types of pipe, tubing, valves, cylinders, tanks, pressure vessels, condenser / evaporator coils, refrigeration coils and many other similar applications





## TANKLESS WATER HEATER FLUSH

### Calci-free™

Code	Description	Qty
68708	Flush 1.2 lbs.	12



#### FEATURES

- Restores circulation in 20 minutes
- More effective than vinegar
- Easy to use with no strong odor
- Cleans heat exchanger fast
- Biodegradable\*

### Tankless water heater flush

**APPLICATION** • Economical chemical cleaner to restore circulation and pressure in commercial and residential tankless water heaters • Unique combination of organic, inorganic and corrosion inhibiting components

**RECOMMENDED FOR** • Routine cleaning to remove calcium and other solid deposits from heating coils in tankless water heaters



### Calci-free™ Kit

Code	Description	Qty
68711	Kit with 1.2 lbs. flush	1

#### FEATURES

- A complete cleaning system
- Cleans in only 20 minutes
- Heavy duty, chemical resistant utility pump
- Biodegradable\*

### Complete tankless water heater flush kit

#### APPLICATION

• Restores circulation and pressure in commercial and residential tankless water heaters • Cleans heater coils thoroughly

**RECOMMENDED FOR** • Routine cleaning to remove calcium and other solid deposits from heating coils in tankless water heaters



\* Contains the best available biodegradable surfactants and detergents.



## STANDARD WATER HEATER FLUSH

### Calci-flush™

### Standard tank water heater flush

Code	Description	Qty
68707	1 gallon	4



#### FEATURES

- Removes tank sediment
- Restores water temperature
- More effective than vinegar
- Easy to use with no strong odor
- Biodegradable\*

**WARNING:** This product can expose you to chemicals including Methyl Methanesulfonate, which is known to the State of California to cause cancer, and Methanol, which is known to the State of California to cause birth defects or other reproductive harm. For more information, go to [www.P65Warnings.ca.gov](http://www.P65Warnings.ca.gov).

**APPLICATION** • Highly effective chemical cleaner to dissolve and flush standard water heaters and heat exchangers • Unique combination of cleaning and corrosion inhibiting components

**RECOMMENDED FOR** • Routine cleaning to remove calcium and other solid deposits from tanked water heaters



Adapter allows secure connection and quick application.



\* Contains the best available biodegradable surfactants and detergents.



## MISCELLANEOUS

### EP-200 & 400

#### Epoxy putty

Code	Description	Qty
97600	2 oz. EP-200 with display	24
97601	2 oz. EP-200 refill	24
97602	2 oz. EP-200 on blister card	12
97606	4 oz. EP-400 boxed	12



#### FEATURES

- Mixes like putty
- Hardens in minutes
- Can be drilled, tapped, filed, machined, sanded and painted

**APPLICATION** • Pre-measured, high-grade epoxy and hardener formulated together in one stick

- Break off the amount needed for each repair
- Bonds to most surfaces

**RECOMMENDED FOR** • Bonding and filling metals and a variety of other materials



### Magne-Patch™

#### Instantly stops small leaks in steel tanks

Code	Description	Qty
68442	Blister card	12

#### FEATURES

- Provides temporary repair
- Saves time
- Helps avoid serious spills

**APPLICATION** • A powerful, permanent magnet holds a flexible plug against the hole and against existing pressure

- Quickest tank repair available
- Reusable
- Blister packed

**RECOMMENDED FOR** • For steel tanks holding oil, gasoline, water, and chemicals



blister card ▶



### Pipe Repair Kit

#### Quick-fix pipe repair system

Code	Description	Qty
82112	Pipe repair kit	12

#### FEATURES

- Easy to use, fast setting, durable repair
- Reduces repair cost
- Withstands pressure up to 450 PSI

**APPLICATION** • Stops leaks on all rigid pipes • Consists of a 2" x 4' knitted fiberglass cloth coated with a water-activated polyurethane resin that adheres to all metal, plastic, fiberglass and concrete piping

**RECOMMENDED FOR** • Plumbing • Pool • Spa • Irrigation • HVAC applications





## RECTORSEAL PIPE THREAD SEALANTS

### RectorSeal No. 5®

● Yellow - multi-purpose pipe thread sealant

Code	Description	Qty
25790	1-¾ oz.	24
25631	¼ pt.	24
25551	½ pt.	24
25431	1 pt.	12
25300	1 qt.	12
25271	1 gal.	4
Canada		
25001	¼ pt.	12
25002	½ pt.	8
25433	1 pt.	12

**APPLICATION** • Lubricates and protects threaded pipe and fittings • Can be pressurized immediately up to 100 psi for piping up to 2" diameter • Ideal for a wide variety of fluids and gases including potable water

**RECOMMENDED FOR**

- Galvanized Steel • Iron • Brass • Copper • Aluminum
- Stainless Steel • Polyethylene • RTRP • PVC



NSF Certified to NSF/ANSI CAN 61 NSF DW-WP-108



**FEATURES**

- Non-hardening / Slow drying
- Lead free
- Smooth application
- 2 year shelf life
- Certified to NSF/ANSI/CAN 61



## RECTORSEAL PIPE THREAD SEALANTS

Continued

### RectorSeal T Plus 2<sup>®</sup>

● White - PTFE enriched pipe thread sealant

Code	Description	Qty
23710	1-3/4 oz.	24
23631	1/4 pt.	24
23551	1/2 pt.	24
23431	1 pt.	12
23391	1 qt.	12
<b>Canada</b>		
23001	1/4 pt.	12
23002	1/2 pt.	8
23435	1 pt.	12

**APPLICATION** • Contains PTFE & synthetic fibers for superior performance • Can be pressurized immediately following application

**RECOMMENDED FOR**

- Galvanized Steel • Iron • Brass • Copper • Aluminum
- Stainless Steel • Polyethylene • RTRP • PVC
- CPVC • ABS



**FEATURES**

- Non-hardening
- Lead free
- 2 year shelf life
- Certified to NSF/ANSI/CAN 61



FBC™ System Compatible indicates that this product has been tested, and is monitored on an ongoing basis, to assure its chemical compatibility with FlowGuard Gold®, BlazeMaster® and Corzan® piping systems and products made with TempRite® Technology. The FBC System Compatible Logo, FBC™, FlowGuard Gold®, BlazeMaster®, Corzan® and TempRite® are trademarks of Lubrizol Advanced Materials, Inc. or its affiliates.



A CSW Industrials Company

**Extended heating service product information can be found at:** [rectorseal.com/heating](http://rectorseal.com/heating)

### **RECTORSEAL HVAC DIVISION**


RectorSeal provides industry-leading digital and print support materials for its extensive chemical and mechanical solutions that include:

- Technical Product Information
- Marketing Support Materials
- Engaging Product Demonstration Videos
- Informative SDS and Product Data Sheets
- On-demand and Live Training and Webinars
- Learning Management System (LMS) support via RectorSeal Academy
- Informative Distributor and Sales Representative Tools
- Industry-related Tradeshow and Events Information


For complete details, visit [www.rectorseal.com](http://www.rectorseal.com)

For the latest product enhancements, news, and updated information, please follow RectorSeal's social media channels.

 [facebook.com/rectorseal](https://facebook.com/rectorseal)

 [linkedin.com/company/rectorseal](https://linkedin.com/company/rectorseal)

 [twitter.com/rectorseal](https://twitter.com/rectorseal)

 [instagram/rectorseal](https://instagram/rectorseal)

 [youtube.com/rectorsealcorp](https://youtube.com/rectorsealcorp)

All information is believed to be current at the time of printing, but our policy is one of continuous development. RectorSeal makes no warranties, express or implied, as to its accuracy. RectorSeal reserves the right to discontinue, update or change the information at any time without notice or without incurring obligations.

**RectorSeal®** • 2601 Spenwick Drive, Houston, TX 77055, USA • 713-263-8001 • [rectorseal.com](http://rectorseal.com)

RectorSeal®, the logos and other trademarks are property of RectorSeal, LLC, its affiliates or its licensors and are protected by copyright, trademark and other intellectual property laws, and may not be used without permission. RectorSeal reserves the right to change specifications without prior notice. ©2022 RectorSeal. All rights reserved. R50490 11/22