
# 5121 Lead-Free Mixing Valve

The compact 5121 mixing valve is certified to ASSE 1070, CAS B125.3, NSF 61 and is listed by ASSE, CSA and IAPMO. The ASSE 1070 listing allows for point of use applications within homes, hospitals, schools, nursing homes, public facilities, etc. where a 1070 valve is required.



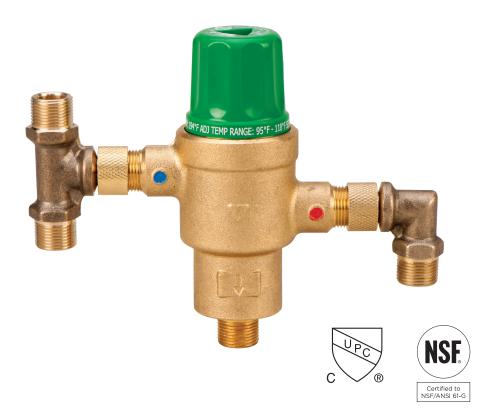

# **Submittal Data Information** 5121 Lead-Free Mixing Valve

# Submittal Data # 100-180 Supersedes: New

## Effective: 06/01/16

#### **Features**

< .25% lead ASSE 1070 Listed Compact Design Suitable for use in Potable Water Mounting Bracket Connects to 3/8" Flexible Hose or Compression 3/8" OD Tube Check Valves Included Inlet Strainers Included Tamper Resistant Cap Performance

Max. Flow: 5.8 GPM (22 L/min)1 <sup>1</sup>Flow should never exceed standards for pipe size Min. Flow: .34 GPM (1.3 L/min)1

Hot Supply Temperature: 120-180°F (49-82°C)

Cold Supply Temperature: 39-85°F (4-29°C)

Max. Inlet Pressure: 230 psi (15.8 Bar)

Max. Variation in Supply Pressure: 20%

Min. Temperature Differential Between Hot Supply and Mixed: 10°F (5.6°C)

Outlet Temperature Range: 95-118°F (35-47.8°C)

Factory set to: 110°F (43.3°C)

Accuracy of Outlet Temperature:  $(\pm)$  3° F (2° C)

## Materials

Body: Forged Brass Internal Components: ≤ .25% lead Brass, Noryl GFN2 Seals: Viton Spring: Stainless Steel Piston: Engineered Polymer Gaskets: EPDM

## **Approvals/Listings**

ASSE 1070

cUPC

CSA B125.3






Taco Inc., 1160 Cranston Street, Cranston, RI 02920 / (401) 942-8000 / Fax (401) 942-2360 Taco (Canada) Ltd., 8450 Lawson Road, Unit #3, Milton, Ontario L9T 0J8 / (905) 564-9422 / Fax (905) 564-9436 www.TacoComfort.com

# **Application:**

The 5121 Mixing Valve is a compact thermostatic valve designed to deliver tempered water at constant temperatures. It is specifically intended for use with individual faucets whenever an ASSE 1070 valve is required. The valves design and advanced thermostatic element ensures a stable mixed water temperature throughout the valves adjustable range and when used within the valves specifications.

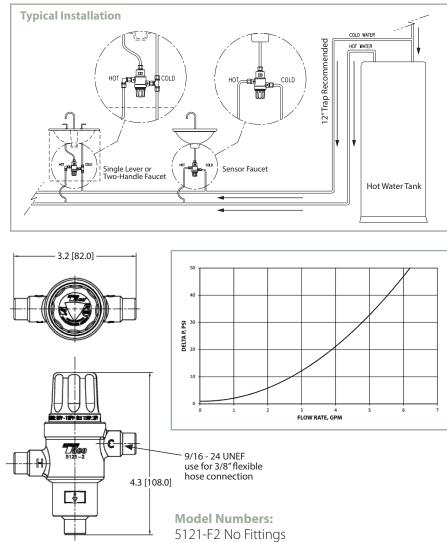

Dimensions for reference only

5421-L2 Includes Tee and Elbow