


FIVE PENDANT

tala.

SKU: CP-WHT-FIV-BP-01-EU

FINISH: BRASS

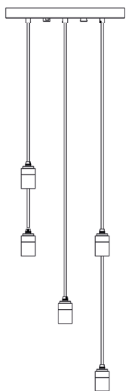

PHYSICAL

Pendant dimension:	L40mm x W40mm x H79mm
Ceiling rose dimension:	L350mm x W350mm x H30mm
Cable length:	3m
Materials:	Powdercoated Steel/Anodised Aluminium
Finish:	White/brass
Weight:	3750 g
IP rating:	IP20
Base:	E27

ELECTRICAL

Appliance class:	Class I
Power:	5 x Max 8 W
Voltage:	220-240 Vac
Frequency:	50/60 Hz



DIMMING

Dimmable 0-100%
Recommended dimmer Varilight V-Pro

Tala Energy Ltd. 25b Vyner Street,
London, E2 9DG, United Kingdom

WARRANTY

2 years

Tala Europe B.V. Bertus Aafjeshove 40
Nieuwegein 3437 JN

EAN

5060915715920

tala.co.uk | hello@tala.co.uk | +44 7700 170343



Specification subject to change without notice. Refer to our website for the most recent product documentation. Tala designs in the EU/UK are protected by registered and or unregistered design rights

FIVE PENDANT

tala.

SKU: CP-BLK-FIV-GP-01-EU

FINISH: GRAPHITE

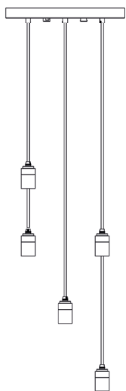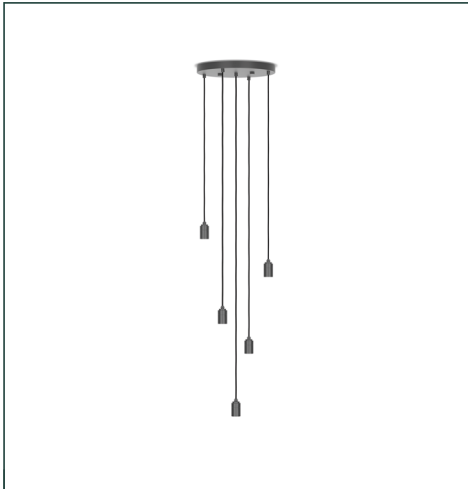

PHYSICAL

Pendant dimension:	L40mm x W40mm x H79mm
Ceiling rose dimension:	L350mm x W350mm x H30mm
Cable length:	3m
Materials:	Powdercoated Steel/Anodised Aluminium
Finish:	Black/graphite
Weight:	3750 g
IP rating:	IP20
Base:	E27

ELECTRICAL

Appliance class:	Class I
Power:	5 x Max 8 W
Voltage:	220-240 Vac
Frequency:	50/60 Hz



DIMMING

Dimmable 0-100%
Recommended dimmer Varilight V-Pro

Tala Energy Ltd. 25b Vyner Street,
London, E2 9DG, United Kingdom

WARRANTY

2 years

Tala Europe B.V. Bertus Aafjeshove 40
Nieuwegein 3437 JN

EAN

5060915715937

tala.co.uk | hello@tala.co.uk | +44 7700 170343

Specification subject to change without notice. Refer to our website for the most recent product documentation. Tala designs in the EU/UK are protected by registered and or unregistered design rights

VORONOI II

3W | 150 lm | 2200K

VORN-II-3W-2200K-E27-T

Voronoi II 3W 2200K E27 Tinted LED Bulb


tala®

The Voronoi II is Tala's most recognised and best-selling light bulb, revered for its striking shape and subtle light output. With its elongated form and droplet shape, the lamp captures the beauty of the Fibonacci sequence as its singular filament wraps around a central glass column. Best paired with Tala's Brass pendant. Fitted with E27 base cap.




PHYSICAL

Bulb diameter:	165mm
Bulb length:	275mm
Glass shape:	A165*
Base:	E27
Materials:	Glass & nickel
Glass finish:	Tinted
Weight:	250g
Max. working temp.:	-5°C to 40°C
IP rating:	IP54



— C0/C80
— C0/C20

IES/LDT photometry files
and product photography
available on request



ELECTRICAL

Power:	3W
Current:	0.01A
Voltage:	220-240V~
Frequency:	50/60Hz
Power factor:	0.9
Efficiency:	50 lm/W
Lifetime:	15,000 hrs

ILLUMINATION

CCT:	2200K
Lumens:	150 lm
Incandescent equiv.:	16W
Flicker:	<5%
Beam angle:	360°
Light source:	LED
CRI:	95Ra
R9:	80
TM30 - Rg	100
TM30 - Rf	94



DIMMING

Dimmable 0-100%
Recommended dimmer: Varilight V-Pro
(For a full list of recommended and compatible dimmers see website)

LOGISTICAL

Unit Packaging	Outer Carton
PC/Ctn: 1	PC/Ctn: 3
Gross weight: 500	Gross weight: 1.9
L 205 x W 190 x H 350mm	L 650 x W 230 x H 335mm

WARRANTY

2 years

EAN

5060400151462

Tala Energy Ltd. 25b Vyner Street,
London, E2 9DG, United Kingdom

Tala Europe B.V. Bertus Aafjeshove 40
Nieuwegein 3437 JN

tala.co.uk | hello@tala.co.uk | +44 7700 170343

Specification subject to change without
notice. Refer to our website for the most
recent product documentation. Tala
designs in the EU/UK are protected by
registered and or unregistered design rights