



Submittal Data Information

5000 Series Lead-Free Mixing Valve

101-060

Effective: April 29, 2015

Supersedes: March 11, 2014

Job: _____ Engineer: _____ Contractor: _____ Rep: _____

ITEM NO.	MODEL NO.	

Features

- ≤ .25% lead
- ASSE 1017 Listed
- Ideal for Domestic Water Distribution Points
- Suitable for use in Potable Water
- Delivers Stable Mixed Water Temperature
- Extended Mix Temperature Range of 85-176°F (29-80°C)
- Tamper-Resistance Cap
- Union and NPT Options
- Sweat, NPT, Pex, CPVC Union Connections
- Low Headloss
- Outlet Temperature Strip
- Optional Dial Gauge and Adaptor

Performance

CV: 2.3
Max. Flow: 20 gpm (76 L/Min)
NOTE: Flow should never exceed standards for pipe size.
Min. Flow: 1 gpm (3.8 L/Min)
Hot Supply Temperature: 120-180°F (49-82°C)
Cold Supply Temperature: 39-80°F (5-27°C)
Max. Inlet Pressure: 230 psi (15.85 Bar)
Max. Variation in Supply Pressure: 20%
Min. Temperature Differential Between Hot Supply and Mixed: 27°F (15°C)
Outlet Temperature Range: 85-175 F (29-80°C)
Factory set to: 115-120°F (41-45°C)
Accuracy of Outlet Temperature: ± 3°F

Materials

Body: Forged Brass ≤ .25% lead Brass
Internal Components:
 ≤ .25% lead Brass
 Noryl GFN2
Seals: Viton
Spring: Stainless Steel
Piston: Polysulfone
Fittings: Varies (Brass, CPVC, Copper)
Gaskets: EPDM
Temperature Gauge: Stainless Steel
Gauge Fitting: Brass

Approvals


ASSE 1017
cUPC Listed
CSAB125.3






Application

This versatile NSF 61 and ASSE 1017 mixing valve provides the ultimate performance for domestic hot water applications. The 5000 Series ASSE 1017 certification allows for domestic hot water storage at temperatures high enough to increase the effective storage capacity of a water heater, kill harmful bacteria and still be delivered at a safe 120°F or less. The valve's unique design and advanced thermostatic element ensures a stable mixed water temperature throughout the extended 85°-176°F range.

Low Temperature or Radiant Installation

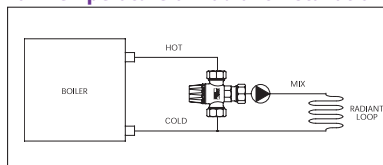

Typical Domestic Water Installation

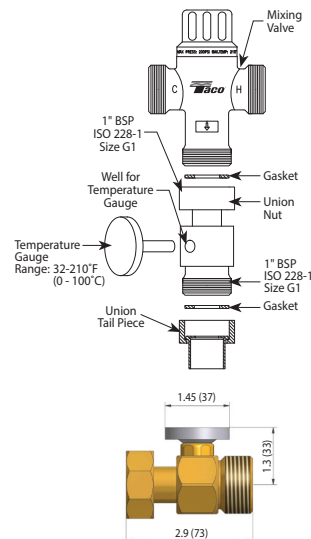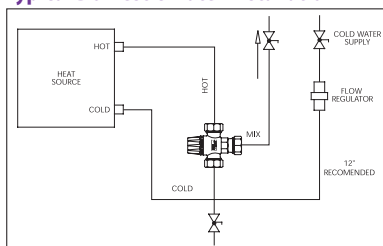

5000 Series Mixing Valve Dimensions *Dimensions for reference only*

Taco Model	Description	A Height		B Lower Height		C Width	
		In.	mm	In.	mm	In.	mm
5000-3	BODY ONLY*	4.0	101.6	1.9	48.3	3.3	83.8
5002-B3	1/2" UNION CPVC	5.8	147.3	3.7	94.0	7.1	180.3
5002-C3	1/2" UNION SWEAT	4.8	121.9	2.7	68.6	4.8	121.9
5002-P3	1/2" UNION PEX	5.0	128.5	2.9	73.7	5.4	137.2
5002-T3	1/2" UNION NPT	5.3	134.6	3.2	81.3	5.8	147.3
5003-B3	3/4" UNION CPVC	5.8	147.3	3.7	94.0	7.1	180.3
5003-C3	3/4" UNION SWEAT	5.0	127.0	2.9	73.7	5.4	137.2
5003-N3	3/4" NPT FEMALE	4.3	109.2	2.2	55.9	3.0	76.2
5003-P3	3/4" UNION PEX	5.1	129.5	2.9	73.7	5.4	137.2
5003-T3	3/4" UNION NPT	5.5	139.7	3.4	86.4	6.3	160.0
5004-C3	1" UNION SWEAT	6.1	154.9	4.0	101.6	5.4	137.2
5004-P3	1" UNION PEX	5.2	132.1	3.1	78.7	5.8	147.3

For models with a gauge add -G to the end of the model number. This will change the total valve height.

*Does not include connections



Taco Inc., 1160 Cranston Street, Cranston, RI 02920 / (401) 942-8000 / Fax (401) 942-2360
Taco (Canada) Ltd., 8450 Lawson Road, Unit #3, Milton, Ontario L9T 0J8 / (905) 564-9422 / Fax (905) 564-9436

Do it Once. Do it Right.®

TACO INC., 1160 Cranston Street, Cranston, RI 02920 Telephone: (401) 942-8000 Fax: 942-2360

TACO (Canada), Ltd., 6180 Ordan Drive, Mississauga, Ontario L5T 2B3 Telephone: (905) 564-9422 Fax: (905) 564-9436

Visit our website at: www.taco-hvac.com

Printed in USA
Copyright 2015
TACO, Inc.