



# Submittal Data Information

101-084

## Model 0011-IFC® Cartridge Circulator

Effective: April 22, 2010

Supersedes: June 27, 2007

Job: \_\_\_\_\_ Engineer: \_\_\_\_\_ Contractor: \_\_\_\_\_ Rep: \_\_\_\_\_

ITEM NO.	MODEL NO.	IMP. DIA.	G.P.M.	HEAD/FT.	H.P.	ELEC. CHAR.

### Features

- Integral Flow Check (IFC®)
  - Prevents gravity flow
  - Eliminates separate in-line flow check
  - Reduces installed cost, easy to service
  - Improved performance vs. In-line flow checks
- Unique replaceable cartridge-Field serviceable
- Unmatched reliability-Maintenance free
- Quiet, efficient operation
- Direct drive-Low power consumption
- Self lubricating, No mechanical seal
- Standard high capacity output-Compact design
- Wide range of applications
- Cast Iron or Stainless Steel construction, Flanged connections

### Materials of Construction

Casing (Volute): Cast Iron or Stainless Steel  
 Integral Flow Check:  
 Body, Plunger....Acetal  
 O-ring Seals.....EPDM  
 Spring.....Stainless Steel  
 Stator Housing: Aluminum  
 Cartridge: Stainless Steel  
 Impeller: Non-Metallic  
 Shaft: Ceramic  
 Bearings: Carbon  
 O-Ring & Gaskets: EPDM

### Model Nomenclature

F – Cast Iron, Flanged  
 SF – Stainless Steel, Flanged  
 IFC – Integral Flow Check

### Variations:

Z – Zoning Circulator  
 J – Bronze Cartridge with Cast Iron Casing

### Performance Data

Flow Range: 0 - 30 GPM  
 Head Range: 0 - 31 Feet  
 Minimum Fluid Temperature: 40°F (4°C)  
 Maximum Fluid Temperature: 230°F (110°C)  
 Maximum Working Pressure: 125 psi  
 Connection Sizes: 3/4", 1", 1-1/4", 1-1/2" Flanged



NSF® ≤ .25% Lead


Complies with California Health and Safety Code Section 116875 / AB1953 and Vermont Act 193

### Application


The 0011-IFC with an Integral Flow Check is designed to reduce installation costs when zoning with 00® circulators on large residential or light commercial high head / medium flow applications such as hydronic or radiant heating, hydro-air fan coils, indirect water heaters or domestic water recirculation systems. By locating the removable, spring-loaded IFC inside the pump casing, a separate in-line flow check is eliminated, reducing installation costs. The reduced pressure drop of the IFC increases the 0011 flow performance over in-line check valves. Both the IFC and cartridge are easily accessed for service instead of replacing the entire unit. Our patented Priority Zoning circulator with built-in transformer, relay, priority switch and IFC in one complete, compact package makes it ideal for zoning.

### Pump Dimensions & Weights

Model	Casing	A		B		C		D		F		G		Ship Wt.	
		in.	mm	in.	mm	in.	mm	in.	mm	in.	mm	in.	mm	lbs.	Kg
0011-F4-2 IFC	Iron	7-1/2	191	6-1/8	156	3-1/2	89	3-5/16	84	5-1/2	140	6-1/2	165	12	5.5
0011-SF4-IFC	St. Steel							3-13/16	97	6	152			13	6.0
0011-ZF4-1 IFC	Iron														
0011-ZSF4-IFC	St. Steel														

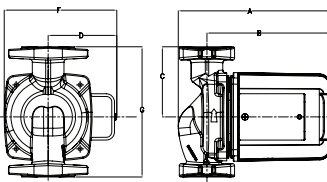


### Mounting Positions

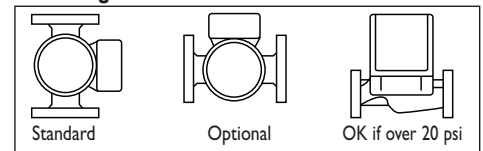

### Electrical Data


Model	Volts	Hz	Ph	Amps	RPM	HP
All Models	115	60	1	1.76	3250	1/8
Motor Type	Permanent Split Capacitor Impedance Protected					
Motor Options	220/50/1, 220/60/1, 230/60/1, 100/110/50/60/1					

### Flange Orientation



### Performance Field - 60Hz

Taco INTEGRAL FLOWCHECK (IFC) MODELS

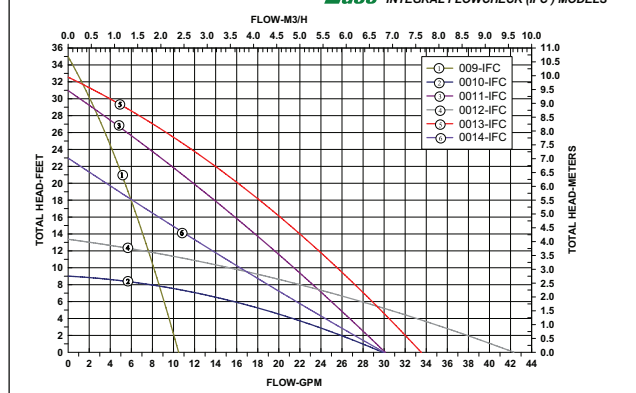

## Do it Once. Do it Right.®

TACO INC., 1160 Cranston Street, Cranston, RI 02920 Telephone: (401) 942-8000 Fax: 942-2360  
 TACO (Canada), Ltd., 6180 Ordan Drive, Mississauga, Ontario L5T 2B3 Telephone: (905) 564-9422 Fax: (905) 564-9436  
 Visit our website at: www.taco-hvac.com

Printed in USA  
 Copyright 2010  
 TACO, Inc.