



Submittal Data Information

101-147

5120 Series Lead-Free Mixing Valve

Effective: April 29, 2015

Supersedes: March 13, 2014

Job: _____ Engineer: _____ Contractor: _____ Rep: _____

ITEM NO.	MODEL NO.

Features

- ≤ .25% lead
- Dual Listed for ASSE 1017 and 1070
- UPC Certified
- Suitable for use in Potable Water Union and NPT Options *non-union NPT is ASSE 1017 only*
- Sweat, NPT, Pex and CPVC Union Connections
- Check Valves Included *(Except non-union versions)*
- No Routine Maintenance Required
- Lockable Max. Temperature Setting
- Outlet Temperature Strip
- Optional Dial Gauge and Adaptor

Performance

- Cv: 1.8
- Max. Flow: 14GPM (54 L/min)¹
¹Flow should never exceed standards for pipe size
- Min. Flow: 1GPM (3.8 L/min)¹
- Hot Supply Temperature: 120-180°F (49-82°C)
- Cold Supply Temperature: 39-80°F (5-27°C)
- Max. Inlet Pressure: 200 psi (13.8 Bar)
- Max. Variation in Supply Pressure: 20%
- Min. Temperature Differential Between Hot Supply and Mixed: 27°F (15°C)
- Outlet Temperature Range: 85-120°F (29-49°C)
- Factory set to: 115-120°F (41-45°C)
- Accuracy of Outlet Temperature: (±) 3° F

Materials

- Body: Forged Brass
- Internal Components: ≤ .25% lead Brass, Noryl GFN2
- Seals: Viton
- Spring: Stainless Steel
- Piston: Polysulfone
- Fittings: Varies (Brass, CPVC, Copper)
- Gaskets: EPDM
- Temperature Gauge: Stainless Steel
- Gauge Fitting: Brass



Approvals/Listings

- ASSE 1017, ASSE 1070
- cUPC
- CSA125.3



Application:

The 5120 Series Mixing Valve is designed to control water temperatures for both point of use and point of distribution installations wherever ASSE1070 or ASSE 1017 mixing valves are required. The valves design and advanced thermostatic element ensures a stable mixed water temperature throughout the valves adjustable range.

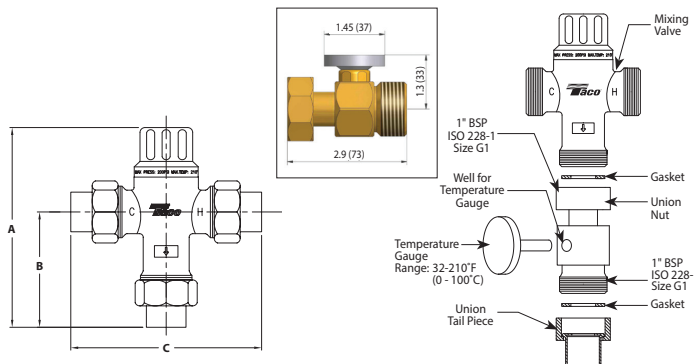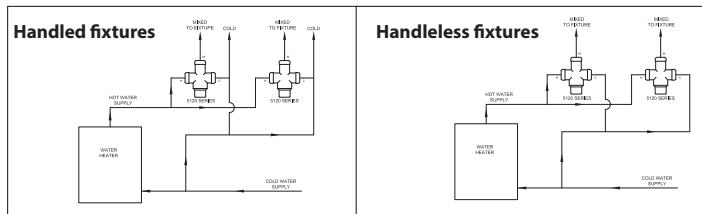

5120 Series Mixing Valve Dimensions *Dimensions for reference only*

Taco Model	Description	A Height		B Lower Height		C Width	
		In.	mm	In.	mm	In.	mm
5120-2	BODY ONLY*	3.8	96.52	1.9	48.3	3.3	83.8
5122-B2	1/2" UNION CPVC	5.8	147.3	3.7	94.0	7.1	180.3
5122-C2	1/2" UNION SWEAT	4.8	121.9	2.7	68.6	4.8	121.9
5122-P2	1/2" UNION PEX	5.0	128.5	2.9	73.7	5.4	137.2
5122-T2	1/2" UNION NPT	5.3	134.6	3.2	81.3	5.8	147.3
5123-B2	3/4" UNION CPVC	5.8	147.3	3.7	94.0	7.1	180.3
5123-C2	3/4" UNION SWEAT	5.0	127.0	2.9	73.7	5.4	137.2
5123-N2	3/4" NPT FEMALE	4.3	109.2	2.2	55.9	3.0	76.2
5123-P2	3/4" UNION PEX	5.1	129.5	2.9	73.7	5.4	137.2
5123-T2	3/4" UNION NPT	5.5	139.7	3.4	86.4	6.3	160.0
5124-C2	1" UNION SWEAT	6.1	154.9	4.0	101.6	5.4	137.2
5124-P2	1" UNION PEX	5.2	132.1	3.1	78.7	5.8	147.3



For models with a gauge add -G to the end of the model number. This will change the total valve height.

*Does not include connections

Taco Inc., 1160 Cranston Street, Cranston, RI 02920 / (401) 942-8000 / Fax (401) 942-2360
 Taco (Canada) Ltd., 8450 Lawson Road, Unit #3, Milton, Ontario L9T 0J8 / (905) 564-9422 / Fax (905) 564-9436
www.taco-hvac.com

Do it Once. Do it Right.®

TACO INC., 1160 Cranston Street, Cranston, RI 02920 Telephone: (401) 942-8000 Fax: 942-2360
 TACO (Canada), Ltd., 6180 Ordan Drive, Mississauga, Ontario L5T 2B3 Telephone: (905) 564-9422 Fax: (905) 564-9436
 Visit our website at: www.taco-hvac.com

Printed in USA
 Copyright 2015
 TACO, Inc.