




EMERGENCY LIGHTING

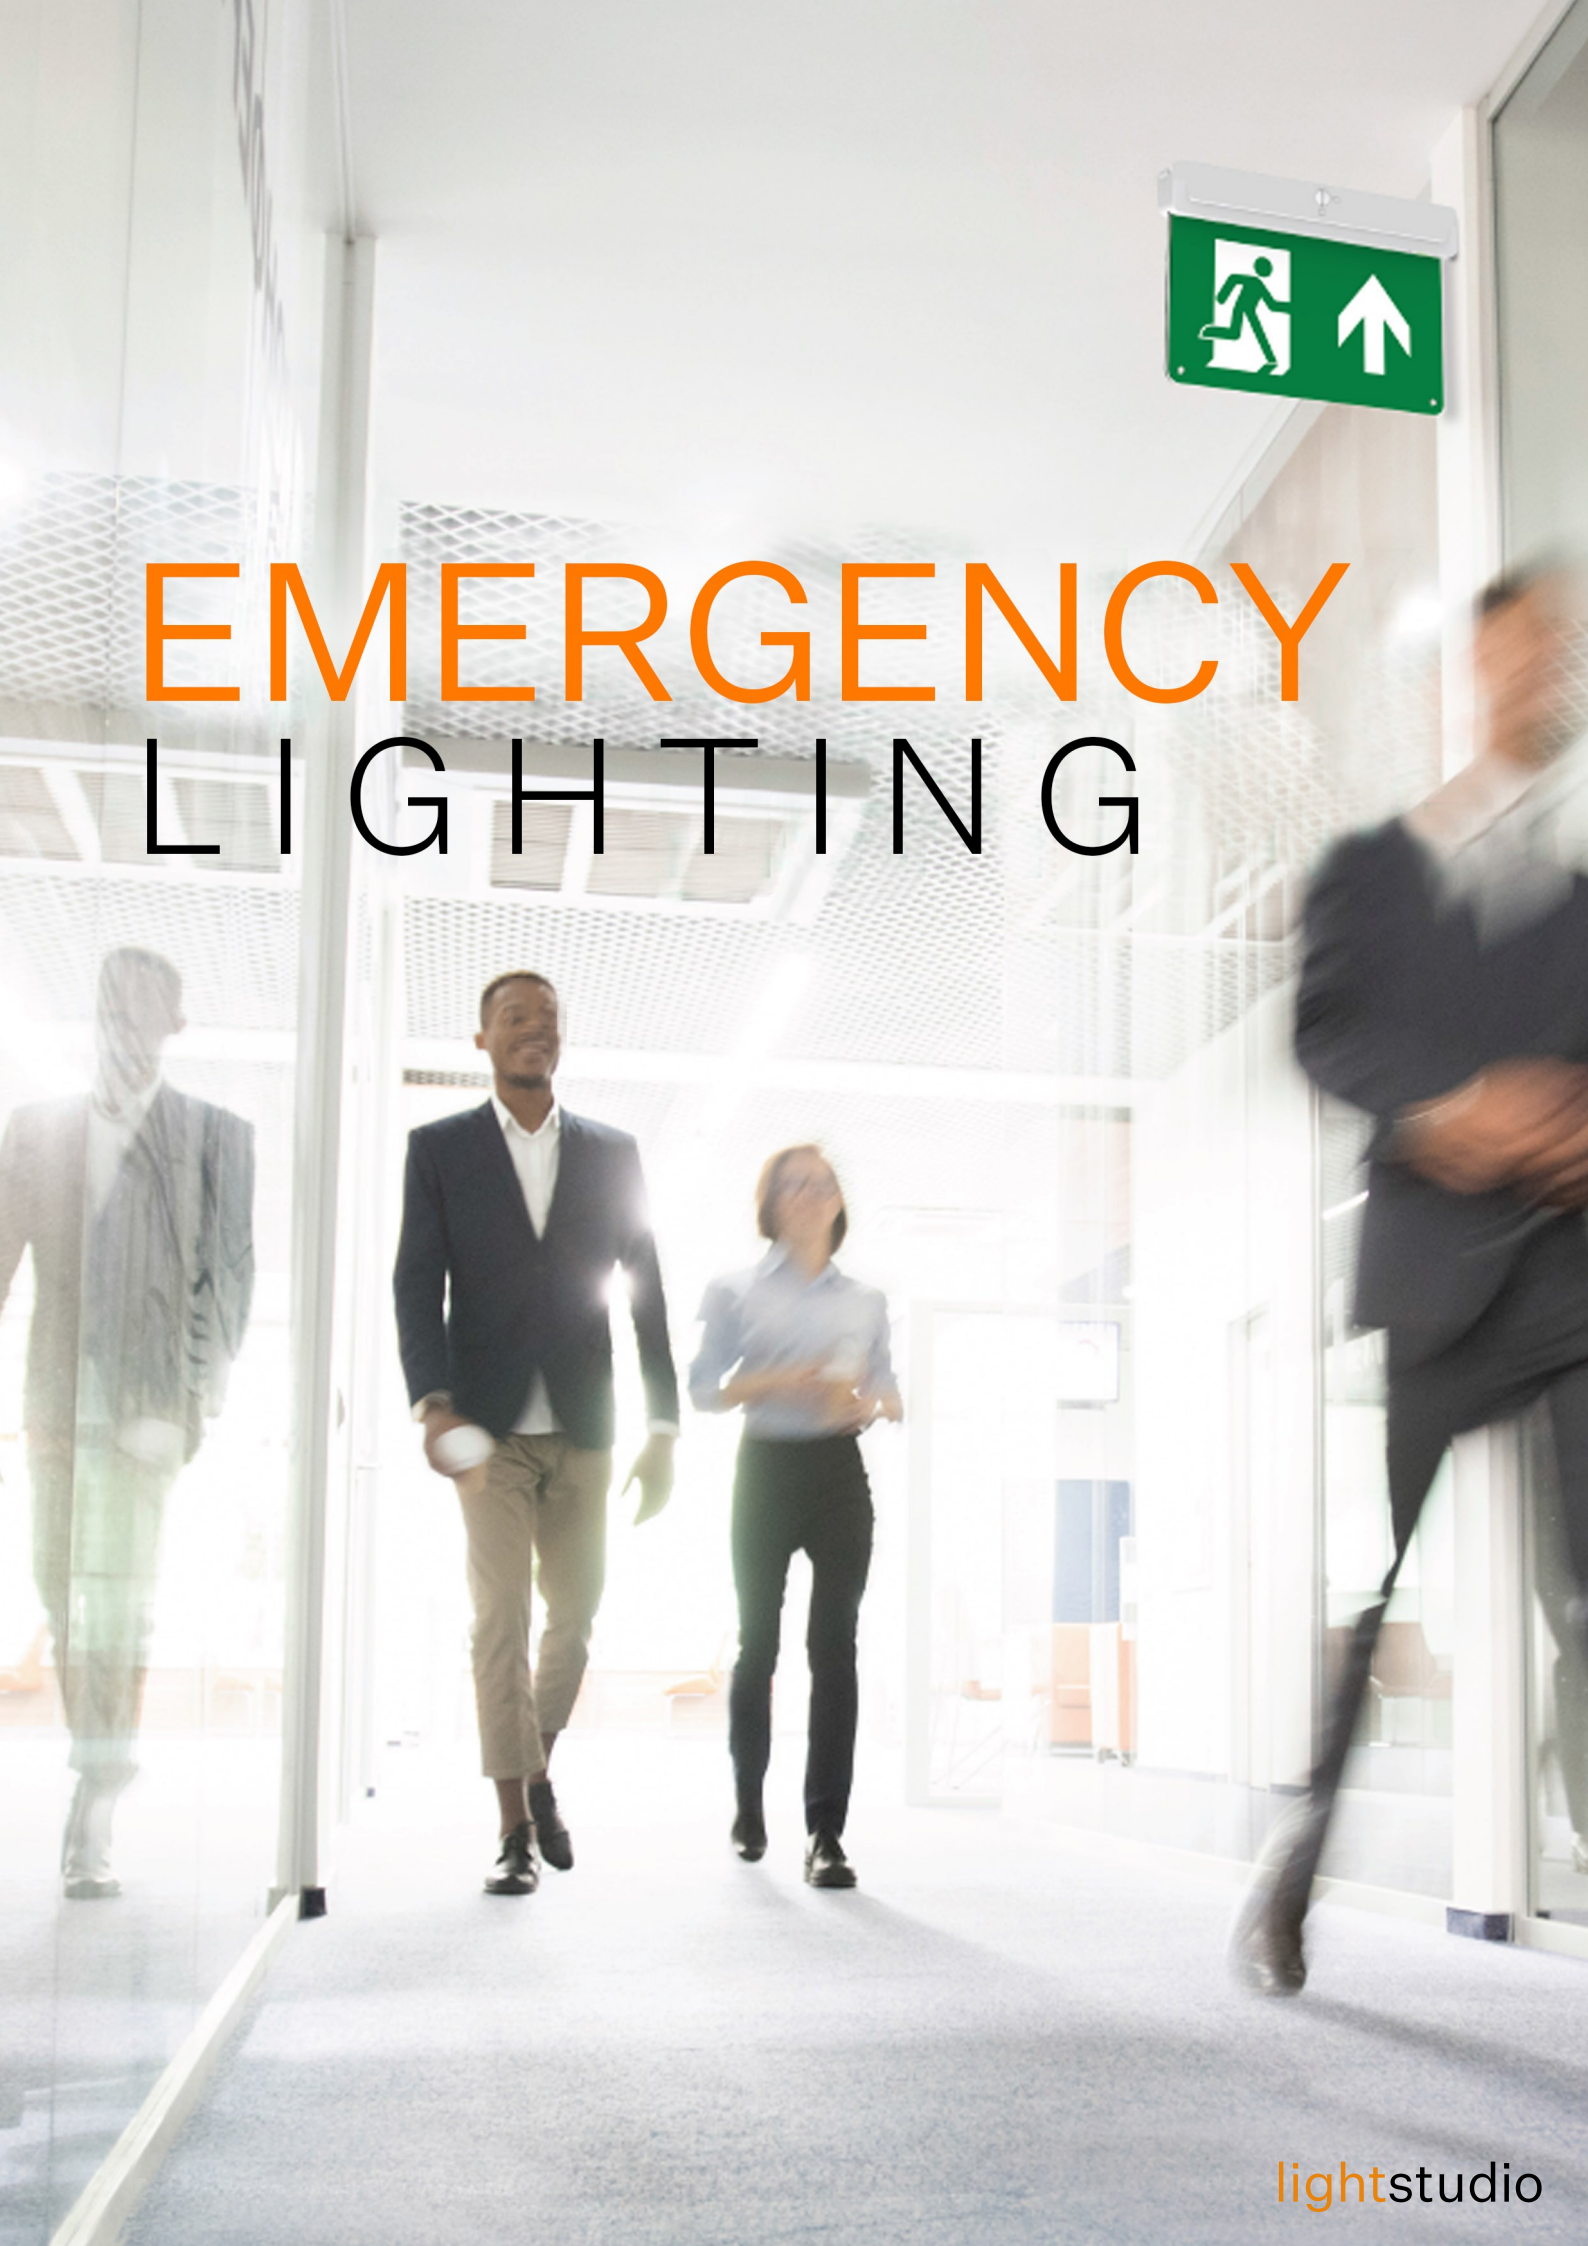

EMERGENCY LIGHTING

CONCEPT

We understand every project is unique. That's why we tailor solutions to meet your specific needs, exceeding expectations with a professional, personalised approach.

DESIGN

We believe in the power of strategic design to transform ideas into reality. Our team combines creative thinking with hands-on execution to deliver impactful solutions.

CONFORMITY

Designs are compiled to the highest standards using computer software to verify required lux levels.

Producer statements are also available to accompany designs at consent stage.

SUPPLY

We carry stock locally to support our projects and local market.

BACK UP

Supported by a team of 10+ engineers, access to over 30 different test functions from IP ratings to Battery Capacity Tests through to Reliability Tests to full photometry.



RoHS




EPA-EX1 LED EXIT SIGN



This Exit Sign is well known for its reliability, energy efficiency and ease of installation. The cover makes it possible to include all diffuser combinations in one box for single or double sided applications. The quick connect bracket provides easy installation making for a versatile fitting for most business settings.

Specifications

- AS/NZS 2293.3 compliant
- Ceiling or wall mount with easy slide connect
- Cantilever mount
- Track and pendant mount on request
- Single or Double sided
- Long life time LiFePO4 battery
- Ideal for commercial and industrial application
- Auto/Manual/DALI test
- Maintained operation
- Polycarbonate cover
- 24m viewing distance

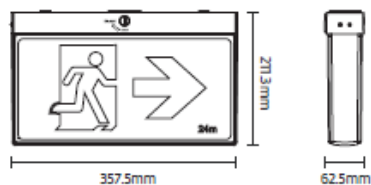

Model	Input Voltage	Mains/Emergency Power	Charge/Discharge Duration	Battery	Test Mode
EPA-EX1-MT-2H	220-240V AC	3W Max/1W Max	16H/≥2hr	LIFEPO4 3.2V 600mAh	AT/MT/DALI


EPA-EX2 LED EXIT SIGN



An elegantly designed blade Exit Sign, suitable for front of house applications.

Specifications

- AS/NZS 2293.3 compliant
- Recessed, Surface and Cantilever mounting options
- Acrylic diffuser with pictogram legends
- Auto/Manual/DALI test
- Maintained operation
- Low power consumption
- Easy connect installation

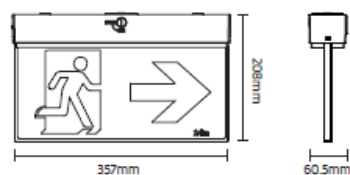

Model	Input Voltage	Mains/Emergency Power	Charge/Discharge Duration	Battery	Test Mode
EPA-EX2-MT-2H	220-240V AC	3W Max/1W Max	16H/≥2hr	LIFEPO4 3.2V 600mAh	AT/MT/DALI


EPE-EX5 WATERPROOF EXIT SIGN IP65



Designed for both indoor and semi-outdoor use to ensure clear and visible exit directions for evacuations.

Specifications

- AS/NZS 2293.3 compliant
- Ceiling mount
- Auto/Manual/DALI test
- Polycarbonate cover

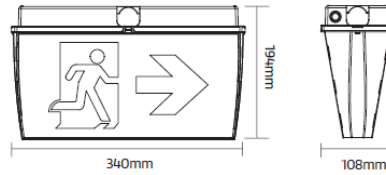

Model	Input Voltage	Mains/Emergency Power	Charge/Discharge Duration	Battery	Test Mode
EPE-EX5-St-MT-2H	220-240V AC	6W Max/1W Max	16H/≥2hr	LIFEPO4 6.4V 1500mAh	AT/MT/DALI


EPA-EX4A LED JUMBO EXIT SIGN



This self-contained LED Exit Sign is larger than the standard with a 40 meter viewing distance. High-efficiency LED chips are evenly laid out at the upper and bottom of the sheet steel to ensure an even light distribution, without any shadow, for such a large exit sign.

Specifications

- AS/NZS 2293.3 compliant
- Ceiling, wall or pendant mounting options
- Single or double sided for enhanced visibility
- Auto/Manual/DALI test
- 40m viewing distance

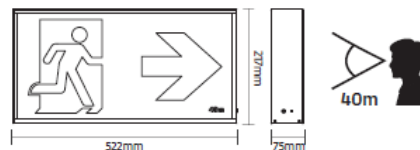

Model	Input Voltage	Mains/Emergency Power	Charge/Discharge Duration	Battery	Test Mode
EPA-EX4A-MT-3H-40M	220-240V AC	65lm@7W Max/3W Max	16H/≥2hr	LIFEPO4 6.4V 1500mAh	AT/MT/DALI


EPE-3W-EM LED / EPE-3W-EM-SB EMERGENCY DOWNLIGHT




Specifications

- Recessed or surface mount options
- Round lens for open area applications
- Oval lens for escape route applications
- High power and efficiency LED
- Ø50mm with 80/140mm trim available
- Ø80mm adaptor ring for larger cutouts included
- Long life time LiFePO4 battery
- Auto/Manual/DALI test
- D63 spacing
- Aluminium heatsink
- Samsung LED

The EPE-3W-EM Emergency Downlight is controlled by smart IC with self-test function. Two optional lenses, oval or round, for different applications. It has a removable front cover design, with an adaptor ring available if required. Accompanied by an external driver and battery for convenient maintenance.



Configurations & Sizes

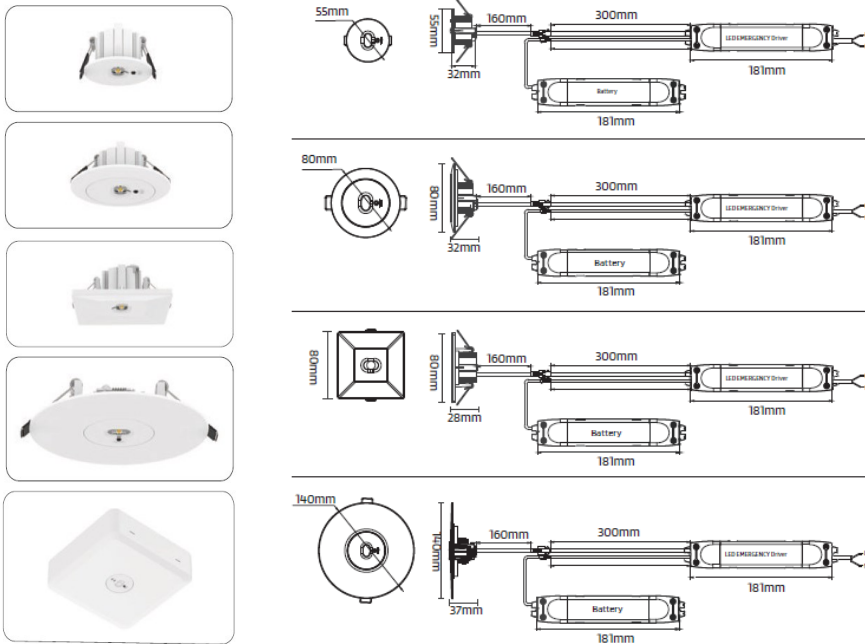

Model	Input Voltage	Mains/Emergency Power	Charge/Discharge Duration	Battery	Test Mode
EPE-3W-EM-MT-2H	220-240V AC	300lm@3.5W Max/3W Max	16H/≥2hr	LIFEP04 6.4V 1500mAh	AT/MT/DALI
EPE-3W-EM-SB-MT-2H	220-240V AC	300lm@3.5W Max/3W Max	16H/≥2hr	LIFEP04 6.4V 1500mAh	AT/MT/DALI

EPE-EM2 SURFACE/RECESSED EMERGENCY LIGHT



The EPE-EM2 Emergency downlight has two optional lenses, oval and round shape, for different applications.

Specifications

- Surface or recessed mounting options
- Round lens for open area applications
- Oval lens for escape route applications
- Innovative downlight with modular design
- Ø140mm
- Long life time LiFePO4 battery
- IP65 optional
- D80
- Samsung LED



IP65 ENCLOSURE

Model	Input Voltage	Mains/Emergency Power	Charge/Discharge Duration	Battery	Test Mode
EPE-EM2-HO-MT-2H AU	220-240V AC	450lm@6W Max/4W Max	16H/≥2hr	LIFEPO4 9.6V 1500mAh	AT/MT/DALI
EPE-EM2-IP-Box		IP65 Enclosure for EM2/5			

EPE-EM6 SMALL TWIN SPOT EMERGENCY LIGHT




Specifications

- Adjustable LED twin spots
- Round lens for open area applications
- Oval lens for escape route applications
- Compact low-profile design
- Long lasting, efficient and ultra bright LEDs
- V-O flame retardant, high impact thermoplastic housing
- IP65 optional




IP65 ENCLOSURE

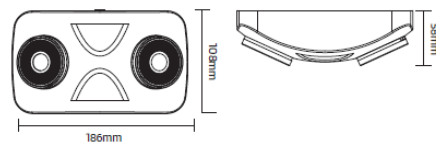


Model	Input Voltage	Mains/Emergency Power	Charge/Discharge Duration	Battery	Test Mode
EPE-EM6-HO-MT-TL-3H	220-240V AC	400lm@4W Max/4W Max	24H/≥3hr	Li-ion 3.74400mAh	AT/MT/DALI
EPE-EM6-IP-Box		IP65 Enclosure			

EPE-EM3 SURFACE MOUNT EMERGENCY BULKHEAD

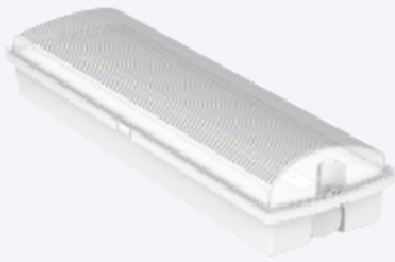

Specifications

Wall or ceiling mount application
 Utilizes an efficient and dependable LED light source
 Switchable between maintained and non-maintained modes

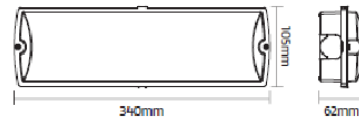

Emergency bulkhead with an IP65 rating for durability.


Model	Input Voltage	Mains/Emergency Power	Charge/Discharge Duration	Battery	Test Mode
EPE-EM3-ST-MT-2H AU	220-240V AC	200lm@6W Max/2W Max	16H/≥2hr	LIFEPO4 6.4V 1500mAh	AT/MT/DALI

EPE-EM7 EMERGENCY TRACK LIGHT



Specifications

Innovative downlight with modular design
 Seamlessly integrates into current track lighting setups
 Switchable between maintained and non-maintained modes
 Ideal for commercial spaces like galleries, museums, clothing and jewelry stores for example

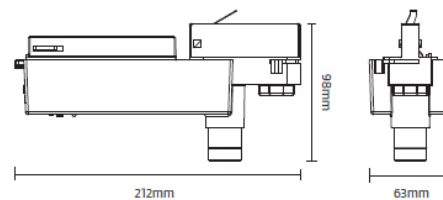

Compatible with four-wire, three circuit tracks.

Model	Input Voltage	Mains/Emergency Power	Charge/Discharge Duration	Battery	Test Mode
EPE-EM7-MT-3H	220-240V AC	220lm@3.5W Max/2W Max	24H/≥3hr	LIFEPO4 6.4V 1500mAh	AT/MT

lightstudio

V01 SEPT2024

t 04 567 8830

e info@lightstudio.co.nz

w www.lightstudio.co.nz

a PO Box 38-876 Wellington, New Zealand