


# supamag<sup>®</sup> : PLAIN ANISOTROPIC MAGNETIC SHEET



## Thicker & stronger for those more demanding applications

- Manufacturing process: calendered
- Material composition: 90% high grade anisotropic ferrite powder, 10% synthetic binder, free of PVC & phthalates
- Adhesive: N/A
- Magnetisation: one face only, UV coated
- Pole pitch: 2mm to 4.5mm travelling down the roll length
- Density: 3.6g/cm<sup>3</sup>
- Colour: dark brown
- Hardness: (Shore-D) 33±5
- Working Face: the UV coated face, with approx. 15% leakage on the reverse face
- Magnetic stability: immune to magnetic damage in normal use
- Working temperature: -10°C to 60°C above which performance will reduce
- Storage temperature: between 10°C and 40°C
- Compliance: conforms to European toy safety standard, EN71 part 3 and is REACH & RoHS approved
- Packaging: rolls supplied in cartons (wound on a 3" core). Cut sheets will be in cartons or on pallets

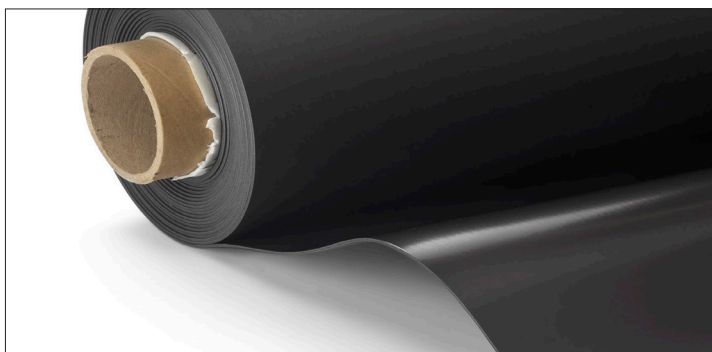

## MORE INFORMATION

[www.anchormagnets.com/pages/supamag-superior-magnetic-sheet](http://www.anchormagnets.com/pages/supamag-superior-magnetic-sheet)

### Disclaimer:

Published technical information concerning our products is based upon research, which, to the best of our company's knowledge & belief, is accurate & reliable.

Whilst the guidelines above will assist the purchaser in considering the suitability & performance of the product for each intended use, it remains the user's responsibility to satisfy themselves as to the suitability of such information for each particular use.

Therefore, Anchor Magnets Ltd & Anchor Magnets Europe, accepts no liability in the event of improper use or processing beyond our guidelines.