


**SETTING TODAY'S STANDARDS
IN PERFORMANCE, QUALITY
AND RELIABILITY.**

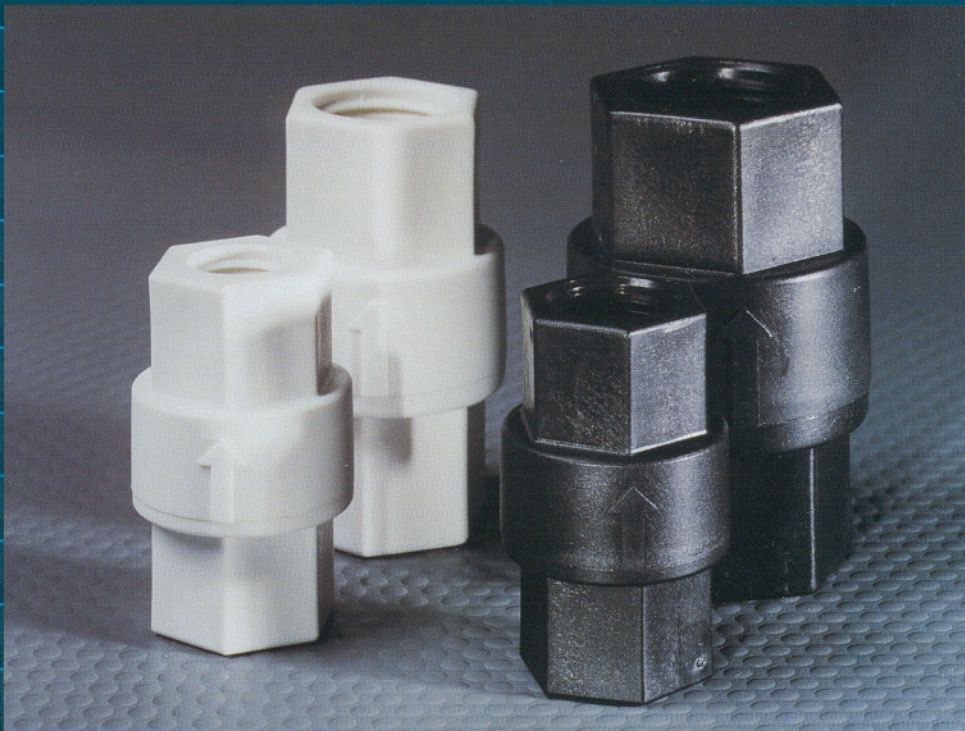

Female Pipe x Female Pipe

MODEL	END CONN.	END CONN.	A	B	C	MAX PRESSURE	OPENING DIA.	APPROX C.V.	WATER G.P.M. @ 10 PSI
694-4F4F	1/4 F.N.P.T.	1/4 F.N.P.T.	.938	2.02	1.44	125	.438	6	17
693-6F6F	3/8 F.N.P.T.	3/8 F.N.P.T.	.938	2.02	1.44	125	.562	8	25
685-8F8F	1/2 F.N.P.T.	1/2 F.N.P.T.	1.125	2.50	1.75	125	.625	10	34
687-12F12F	3/4 F.N.P.T.	3/4 F.N.P.T.	1.125	2.75	1.75	125	.812	17	56

CODE IDENTIFICATION

(F) F.N.P.T. Female


SEAL

- (B) Buna-N
- (E) Ethylene Propylene
- (F) Fluoroelastomer
- (N) Neoprene

MATERIALS

(PP) Polypropylene

PP 685 - 8 F 8 F - B

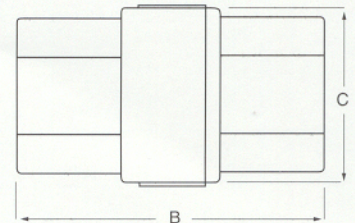

- The 685/687 series polypropylene check valve operates in any position, horizontal or vertical.
- Standard cracking pressure less than 1p.s.i. with a maximum operating pressure of 125p.s.i. and a maximum operating temperature 140°F.
- Buna-N seals standard, ethylene propylene or fluoroelastomer seals available.
- Easily disassembled for repair or replacement of seals.
- Stainless steel spring, with guided polypropylene poppet. Hastelloy springs available.
- For Technical Assistance, custom springs, seals, and end combinations please call or fax our Customer Service Department.



V0406985M4321