


supaferro[®] : SELF-ADHESIVE CHALK VINYL FERRO SHEET (SSF)

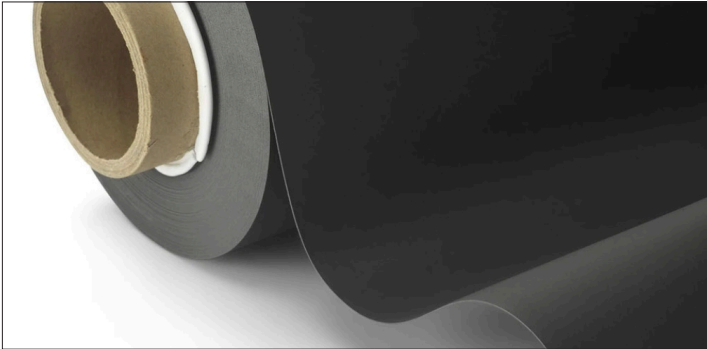

Self-adhesive / ferrous chalkboard surface for bonding to smooth rigid surfaces

- Manufacturing process: calendered ferro with laminated adhesive & chalk vinyl
- Material composition: 90% oxidised iron powder, 10% thermo plastic binder, free of PVC & phthalates, laminated one side with double sided adhesive & on second side with chalk vinyl
- Adhesive: acrylic double-sided P.S.A with filmic release liner
- Magnetisation: N/A
- Pole pitch: N/A
- Density: 3.6g/cm³
- Colour: Black
- Hardness: (Shore-D) 33±5
- Working Face: the chalkboard surface
- Magnetic Stability: N/A
- Working Temperature: 10°C to 30°C
- Storage Temperature: 10°C to 35°C
- Compliance: **Supaferro[®]** (SSF) conforms to European toy safety standard, EN71 part 3 & is REACH & RoHS approved
- Packaging: Rolls supplied in cartons (wound on a 3" core). Cut sheets will be in cartons or on pallets

MORE INFORMATION

www.anchormagnets.com/pages/supaferro-flexible-iron-media

Disclaimer:

Published technical information concerning our products is based upon research, which, to the best of our company's knowledge & belief, is accurate & reliable.

Whilst the guidelines above will assist the purchaser in considering the suitability & performance of the product for each intended use, it remains the user's responsibility to satisfy themselves as to the suitability of such information for each particular use.

Therefore, Anchor Magnets Ltd & Anchor Magnets Europe, accepts no liability in the event of improper use or processing beyond our guidelines.