

LSPU8653X

Product family Width Commercial height Installation N° baskets Engine EAN code

Dishwashers 24" 86 cm Under counter built-in 3, FlexiDuo Single phase 8017709303754



Programs / Functions

| Number of programs | 10+1 | Daily (half load) | Yes |
|----------------------|--------------------------|-------------------|-----|
| Washing temperatures | 100, 113, 122, 130, 150, | Delicates | Yes |
| | 158, 167 °F | Auto | Yes |
| Soak | Yes | Crystal & China | Yes |
| Express 27' | Yes | Eco express | Yes |
| Mix | Yes | Pots & Pans | Yes |
| Self Clean | Yes | | |
| Sterilize | Yes | | |

Options



Dry Assist option Delay start Yes Up to 24 hours FlexiZone half-load Yes option Yes

Baskets

Basket components finish Upper basket Upper basket height adjustment

3 foldable racks On 3 levels

Gray

Lower basketWith 4 foldable racksLower basket with anti-
drip insertsYesLargest loadable dish in
lower basket13 3/4 inches



Sliding Guides Extra Yes Glide Largest loadable dish in 7 inches upper basket Colour Inner Components Cutlery basket Blue

Yes


Technical Features

| Width | 23 9/16 " | Flood protection system | Total Aquastop |
|-------------------------------|--|--|--|
| Depth | 22 7/16 " | Max water hardness | 100°fH;58°dH |
| Display type | OLED | Drying system | Natural condenser drying, |
| Height | 32 3/16 " | | with Dry Assist automatic |
| Display | Delay start, Program progress indicator, Time-to- | | door opening system at the end of the cycle |
| | end indicator | Internal lighting | White LED |
| Program symbols | Symbols | Tub material | Stainless steel |
| On/off indicator | Yes | Filter | Stainless steel |
| Salt indicator | Light | Concealed heating | Yes |
| Rinse aid indicator | Light | element | |
| Program progress indicator | Yes | Hinges | Self-balancing with variable hinges |
| End-of-cycle indicator | On display, with acoustic signal | Min. and max plinth height | 3.9" - 6.6" |
| Washing system | Planetarium | Adjustable feet | 2 3/4", from 33 7/8" to 36 5/8" |
| Third spray arm | Single | Additional gaskets | Yes |
| Water softener | With electronic setting | Back cover | Yes |
| Turbidity sensor Aquatest | Yes | Depth of dishwasher with open door (mm) | 1146 |
| | | Top cover | Metal sheet |

Electrical Connection

| Plug | (A) USA & Mexico | Frequency (Hz) | 60 Hz |
|-----------------|------------------|--------------------|--------------|
| Connected power | 1800 W | Connection type | Single-phase |
| Current | 10 A | Power supply cable | 55 " |
| Voltage | 110-120 V | length | |



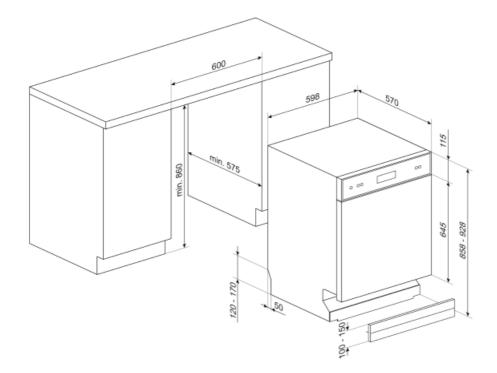



Not included accessories

KITPL60N



Toekick Kit in Black colour with adjustable height and deepness. Can be installed over all the fully integrated and underbench models with variable fulcrum or flexifit hinges.



KITPL60B

Toekick Kit in White colour with adjustable height and deepness. Can be installed over all the fully integrated and underbench models with variable fulcrum or flexifit hinges.

KITGH



Kit glass holder. It has to be fitted on the first basket but only if there are foldable racks



Toekick Kit in Stainless Steel with adjustable height and deepness. Can be fitted over all the fully integrated and underbench models with variable fulcrum or flexifit hinges.

KITPLV2

Kit extension for dishwasher and washing machine: lenght mt. 2



Symbols glossary (TT)




Aquatest measures the clarity of the water during an auto program, and automatically ensures the minimum consumption of water and energy.



COMM_HEIGHT_86_72dpi



LED display: to show programmes, functions and options selected and the time to the end of the cycle.



separate and moveable modules. The new ExtraGlide guide system, available on top of the range models, makes the second

basket even smoother and softer. In fact, it facilitates the extraction of the introduction, even at full load and, for the greater excursion, the insertion of crockery is also facilitated in the rear part.



65°

PLANETARIUM_WASHING_SYSTEM_72dpi

1/2 load: This program is designed for washing dishes not heavily soiled with partial load of the dishwasher.



Normal programme: The normal programme is suitable for normal degrees of dirt for everyday use.



Rapid 27 Mins: The rapid 27 mins quick program takes just 27 minutes to wash a load.



Total Acquastop: In addition to the partial Acquastop protection present in all Smeg dishwashers, some models have an electronic device fitted to the water intake hose, which monitors water levels in the machine, detects leaks in the hose and switches off the water supply immediately when necessary.



Anti-drip: Some models of dishwashers are equipped with special polymer nozzles anti-drip, that improve the process of drying.




Delay Timer: The delay timer can postpone the start of the program by up to 24 hours.




Enersave: At the end of the drying cycle a special device slowly automatically opens the door a few centimeters, to ensure perfect drying and to save up to 20% of energy on some models.



FlexiZone: The 1/2 load flexizone allows you to wash a reduced load saving energy, water and time and there are no restrictions on where the items are placed.



Noise Level: Excellent insulation and special devices keep noise to a minimum.



for delicate dishes which are not heavily soiled.



Delicate: Delicate washing program is designed for delicate dishes which are not heavily soiled.



Soak programme: The soak programme provides a rinse to prevent dirt from drying.



The symbols show the number of plate settings of the dishwasher.

