

STU8612



Product family	Dishwashers
Width	24"
Commercial height	86 cm
Installation	Fully-integrated built-in
N° baskets	2
Engine	Single phase
EAN code	8017709303631



Programs / Functions



Number of programs	5	Delicates	Yes
Washing temperatures	113, 122, 150, 158 °F	Normal	Yes
Mix	Yes	Pots & Pans	Yes
Daily (half load)	Yes		

Options



Delay start	3-6-9 hours	Extra-dry option	Yes
-------------	-------------	------------------	-----

Baskets



Basket color	Gray	Lower basket with anti-drip inserts	Yes
Upper basket	Central fixed racks	Largest loadable dish in lower basket	13 3/4 inches
Upper basket height adjustment	On two height levels	Colour Inner Components	Blue
Largest loadable dish in upper basket	7 inches	Cutlery basket	Yes
Lower basket	Fixed racks		


Technical Features



Width	23 9/16 "	Tube material	Stainless steel
Depth	21 5/8 "	Filter	Stainless steel
Height	33 3/4 "	Hinges	Self-balancing with fixed hinges
Program symbols	Symbols	Min. and max. frontal panel weight	4.4 - 17.6 lbs
Rinse aid indicator	Light	Min. and max plinth height	4" - 9"
End-of-cycle indicator	Acoustic signal	Adjustable feet	2 3/4", from 33 7/8" to 36 5/8"
Washing system	Standard	Additional gaskets	Yes
Third spray arm	Single	Back cover	Yes
Flood protection system	Single Aquastop	Depth of dishwasher with open door (mm)	1186
Max water hardness	100°FH;58°dH	Top cover	Metal sheet
Drying system	Natural condensation drying		

Electrical Connection

Plug	(A) USA & Mexico	Frequency (Hz)	60 Hz
Connected power	1800 W	Connection type	Single-phase
Current	13 A	Power supply cable length	55 "
Voltage	115 V		

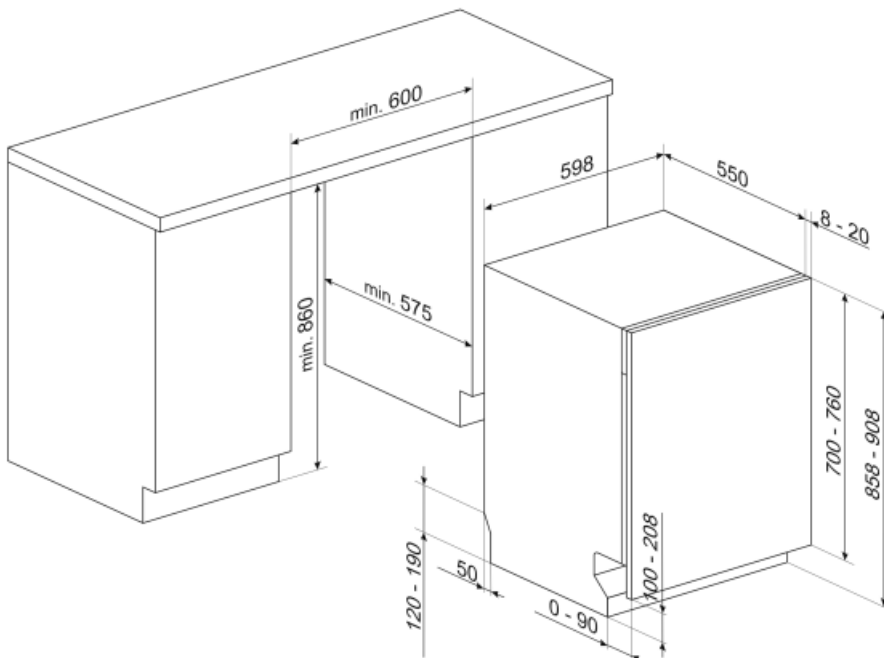

Not included accessories



KIT86CX-1

Door kit, stainless steel, Canali handle, fully integrated dishwasher h.86 cm
Compatible with models with Flexifit and fixed fulcrum hinges.

KITOH

Classic aesthetics handle 22 mm.



KITPL60FABX

Toekick Kit in Stainless Steel with adjustable height. Can be fitted over all the fully integrated and underbench models with Fixed Fulcrum. Can be installed also on the models with variable fulcrum or flexifit hinges.

KITPL60FABN

Toekick Kit in Black colour with adjustable height. Can be fitted over all the fully integrated and underbench models with Fixed Fulcrum. Can be installed also on the models with variable fulcrum or flexifit hinges.



KIT86PORTAN

Anthracite panel with Portofino handle. Can be fitted on the fully integrated dishwashers H86 with no Flexifit hinges. It is not possible to install it on the models with stainless steel panel



KIT86PORTWH

white panel with Portofino handle. Can be fitted on the fully integrated dishwashers H86 with no Flexifit hinges. It is not possible to install it on the models with stainless steel panel



KITPL60FABB

Toekick Kit in White colour with adjustable height. Can be fitted over all the fully integrated and underbench models with Fixed Fulcrum. Can be installed also on the models with variable fulcrum or flexifit hinges.



KIT86X

stainless steel panel with holes for Canali or Opera handle. Can be fitted on the fully integrated dishwashers H86 with no Flexifit hinges. It is not possible to install it on the models with stainless steel panel



KIT86VX

stainless steel panel with Victoria handle. Can be fitted on the fully integrated dishwashers H86 with no Flexifit hinges. It is not possible to install it on the models with stainless steel panel



KIT86PORTX

stainless steel panel with Portofino handle. Can be fitted on the fully integrated dishwashers H86 with no Flexifit hinges. It is not possible to install it on the models with stainless steel panel



KITCH












classic aesthetics handle 14 mm.



KITPLV2

Kit extension for dishwasher and washing machine: lenght mt. 2

Symbols glossary (TT)

	Acquastop: Some Smeg dishwashers are equipped with a simple Acquastop: float sensor in the bottom which is necessary to prevent an accidental leakage of water inside the appliance.		Anti-drip: Some models of dishwashers are equipped with special polymer nozzles anti-drip, that improve the process of drying.
	COMM_HEIGHT_86_72dpi		Delay Timer: The delay timer can postpone the start of the program by up to 24 hours.
	Noise Level: Excellent insulation and special devices keep noise to a minimum.		1/2 load: This program is designed for washing dishes not heavily soiled with partial load of the dishwasher.
	Delicate: Delicate washing program is designed for delicate dishes which are not heavily soiled.		Normal programme: The normal programme is suitable for normal degrees of dirt for everyday use.
	The symbols show the number of plate settings of the dishwasher.		System WaterSave ensures the best washing results with minimal water consumption depending on the model of dishwasher.
	...		