
FLOCK CHANDELIER

Product Specification

Tom Raffield

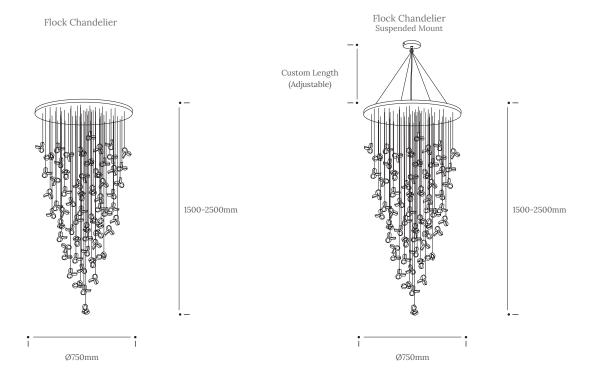

Featherlight curlicues dance in the air. Evoking a murmuration of starlings sweeping across the sky, our Flock Chandelier casts shapes and shadows at every turn.

Wooden wings of sustainable ash, oak and walnut, weightless to the eye, soar together. Each individual steam bent component is handcrafted by our skilled workshop team and suspended from a solid oak top plate to create show-stopping impact. Illuminated by three filament bulbs, each piece of the intricate design is in constant motion, creating a wooden chandelier unlike any other.

To ensure your Flock Chandelier is the perfect fit for your space, please provide us with your preferred drop length (from the ceiling plate to the bottom of the chandelier) when ordering. Your bespoke piece will then be made to this custom height. If you have any questions regarding this or any other feature, please email sales@tomraffield.com for assistance. Please note this is a bespoke handmade product and once it is commissioned it is non-returnable.

Product Type : Chandelier	SKU	Wood types	Dimensions L x W x H (mm)		Weight (kg)	
			Unboxed	Boxed	Unboxed	Boxed
Flock Chandelier	TR-FLCK	Ash, Oak and Walnut - Oak top plate	Ø750 x h1500-2500	710 x 710 x 490	8	14.4
Flock Chandelier Suspended Mount	TR-FLCK-SUS	Ash, Oak and Walnut - Oak top plate	Ø750 x h1500-2500 + Custom height of tension wire	710 x 710 x 490	8.2	14.6
Materials	Ash	Oak	Walnut		Other materials	
					Steel tension wire (Suspended Mount)	
Finish	Finished with a blend of natural wax oils to give a protective, hardwearing and beautiful finish.					
Ceiling kit options	Brass bulb holders	Ceiling kit	Flex		Reccomended light bulbs	
		Brass cord grips	Flex colour: black fabric		Max 25W LED	
		E27 (240v)	Various lengths (Adjustable)			
Care information	Dusting your light regularly and with a light feather duster should keep your light looking clean, otherwise wipe with a damp cloth and remove any moisture with a dry cloth. Gentle furniture polishes can also be used.					
Additional information	Suitable for use on 240v c Installation instructions a					

This product must be installed by a qualified electrician.