
MULLION FLOOR LIGHT

Tom Raffield

Product Specification

Mullion Floor Light

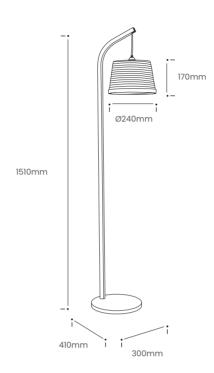

An iconic design classic. The Mullion Floor Light naturally nods to Cornwall's industrial heritage, with simple striking effect.

A single arching curve of steam bent oak rises from an alluring, circular base. An exposed grey flex tracing its silhouette. Suspended underneath, our minimalist, coiling Helix pendant takes shape. Use the Mullion to illuminate specific areas, to layer light or add depth to your interior.

Switch on. Sit back. Let the Mullion make light work of transforming your space.

Product Type : Floor Light			Dimensions I	Dimensions L x W x H (mm)		Weight (kg)	
	SKU	Wood types	Unboxed	Boxed	Unboxed	Boxed	
Mullion Floor Light		Oak	000 (10)510	315 x 315 x 1550	2.65	4.85	
	TR-MUL-FLR-O	Uak	300 x 410 x 1510	313 X 313 X 1330			
Materials					Other materials		
	Oak					Birch ply hanging disk	
Finish	Wooden floor stand - Finished with a blend of natural wax oils to give a protective, hardwearing and beautiful finish. Shade - Non-toxic, hard wearing water based varnish - satin						
Wiring kit options	Brass bulb holder with black inline foot switch and plug	Wiring kit	Flex	Flex		Recommended light bulb	
		Plastic inline foot switch	Flex colour: gre	Flex colour: grey fabric		Max 25W LED	
		E27 (240v)		ble length: 240cm from switch to holder. 115cm from switch to plug.			
Care information	Dusting your light regularly and with a light feather duster should keep your light looking clean, otherwise wipe with a damp cloth and remove any moisture with a dry cloth. Gentle furniture polishes can also be used.						
Additional information	 Suitable for use on 240v circuits. This product can be plugged straight into a 240v outlet. 						
		ch View Business Park, Bickland tomraffield.com +44 (0) 1326					

tomraffield.com contact@tomraffield.com +44 (0) 1326 722725 #tomraffield @tomraffield Due to the character of handcrafted natural products, all dimensions are approximate. Wood colour may slightly vary. All products, prices and leadtimes are correct at time of print and are subject to change without notice.