


FIVE PENDANT

tala.

SKU: CP-WHT-FIV-BP-01-EU

FINISH: BRASS

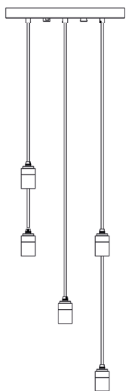

PHYSICAL

Pendant dimension:	L40mm x W40mm x H79mm
Ceiling rose dimension:	L350mm x W350mm x H30mm
Cable length:	3m
Materials:	Powdercoated Steel/Anodised Aluminium
Finish:	White/brass
Weight:	3750 g
IP rating:	IP20
Base:	E27

ELECTRICAL

Appliance class:	Class I
Power:	5 x Max 8 W
Voltage:	220-240 Vac
Frequency:	50/60 Hz



DIMMING

Dimmable 0-100%
Recommended dimmer Varilight V-Pro

WARRANTY

2 years

EAN

5060915715920

Tala Energy Ltd. 25b Vyner Street,
London, E2 9DG, United Kingdom

Tala Europe B.V. Bertus Aafjeshove 40
Nieuwegein 3437 JN

tala.co.uk | hello@tala.co.uk | +44 7700 170343



Specification subject to change without notice. Refer to our website for the most recent product documentation. Tala designs in the EU/UK are protected by registered and or unregistered design rights

FIVE PENDANT

tala.

SKU: CP-BLK-FIV-GP-01-EU

FINISH: GRAPHITE

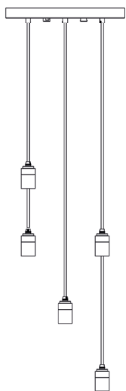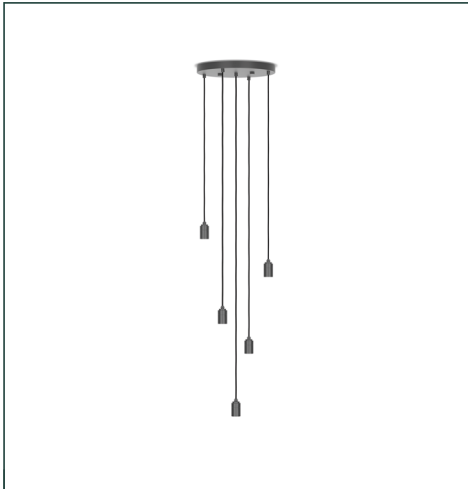

PHYSICAL

Pendant dimension:	L40mm x W40mm x H79mm
Ceiling rose dimension:	L350mm x W350mm x H30mm
Cable length:	3m
Materials:	Powdercoated Steel/Anodised Aluminium
Finish:	Black/graphite
Weight:	3750 g
IP rating:	IP20
Base:	E27

ELECTRICAL

Appliance class:	Class I
Power:	5 x Max 8 W
Voltage:	220-240 Vac
Frequency:	50/60 Hz



DIMMING

Dimmable 0-100%
Recommended dimmer Varilight V-Pro

Tala Energy Ltd. 25b Vyner Street,
London, E2 9DG, United Kingdom

WARRANTY

2 years

Tala Europe B.V. Bertus Aafjeshove 40
Nieuwegein 3437 JN

EAN

5060915715937

tala.co.uk | hello@tala.co.uk | +44 7700 170343

Specification subject to change without notice. Refer to our website for the most recent product documentation. Tala designs in the EU/UK are protected by registered and or unregistered design rights

VORONOI III

5W | 250 lm | 2200K

VORN-III-5W-2200K-E27-T-02

Voronoi III 5W 2200K E27 Tinted LED Bulb, V.2


tala®

The Voronoi III bulb by Tala is noted for its oversized form and dramatic light output. The exposed internal filament mirrors the Fibonacci sequence, wrapping around a central glass column, and the unique glass shape catches the eye and the imagination. Fitted with E27 base cap.




PHYSICAL

Bulb diameter:	195mm
Bulb length:	344mm
Glass shape:	A195*
Base:	E27
Materials:	Glass & nickel
Glass finish:	Tinted
Weight:	355g
Max. working temp.:	-5°C to 40°C
IP rating:	IP54



— C0/C80
— C0/C20

IES/LDT photometry files
and product photography
available on request



ELECTRICAL

Power:	5W
Current:	0.02A
Voltage:	220-240V~
Frequency:	50/60Hz
Power factor:	0.9
Efficiency:	50 lm/W
Lifetime:	15,000 hrs

ILLUMINATION

CCT:	2200K
Lumens:	250 lm
Incandescent equiv.:	25W
Flicker:	<5%
Beam angle:	360°
Light source:	LED
CRI:	95Ra
R9:	80
TM30 - Rg	100
TM30 - Rf	94



DIMMING

Dimmable 0-100%
Recommended dimmer: Varilight V-Pro
(For a full list of recommended and compatible dimmers see website)

LOGISTICAL

Unit Packaging	Outer Carton
PC/Ctn: 1	PC/Ctn: 2
Gross weight: 580	Gross weight: TBC
L 250 x W 250 x H 400mm	L TBC x W TBC x H TBCcm

WARRANTY

2 years

EAN

5060400159666

Tala Energy Ltd. 25b Vyner Street,
London, E2 9DG, United Kingdom

Tala Europe B.V. Bertus Aafjeshove 40
Nieuwegein 3437 JN

tala.co.uk | hello@tala.co.uk | +44 7700 170343

Specification subject to change without
notice. Refer to our website for the most
recent product documentation. Tala
designs in the EU/UK are protected by
registered and or unregistered design rights