


FIVE PENDANT

tala.

SKU: CP-WHT-FIV-BP-01-EU

FINISH: BRASS

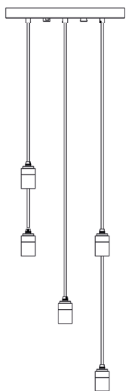

PHYSICAL

Pendant dimension:	L40mm x W40mm x H79mm
Ceiling rose dimension:	L350mm x W350mm x H30mm
Cable length:	3m
Materials:	Powdercoated Steel/Anodised Aluminium
Finish:	White/brass
Weight:	3750 g
IP rating:	IP20
Base:	E27

ELECTRICAL

Appliance class:	Class I
Power:	5 x Max 8 W
Voltage:	220-240 Vac
Frequency:	50/60 Hz



DIMMING

Dimmable 0-100%
Recommended dimmer Varilight V-Pro

Tala Energy Ltd. 25b Vyner Street,
London, E2 9DG, United Kingdom

WARRANTY

2 years

Tala Europe B.V. Bertus Aafjeshove 40
Nieuwegein 3437 JN

EAN

5060915715920

tala.co.uk | hello@tala.co.uk | +44 7700 170343



Specification subject to change without notice. Refer to our website for the most recent product documentation. Tala designs in the EU/UK are protected by registered and or unregistered design rights

FIVE PENDANT

tala.

SKU: CP-BLK-FIV-GP-01-EU

FINISH: GRAPHITE

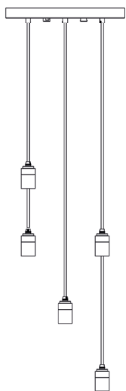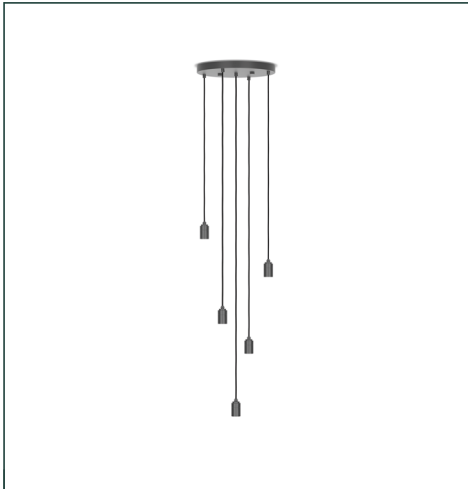

PHYSICAL

Pendant dimension:	L40mm x W40mm x H79mm
Ceiling rose dimension:	L350mm x W350mm x H30mm
Cable length:	3m
Materials:	Powdercoated Steel/Anodised Aluminium
Finish:	Black/graphite
Weight:	3750 g
IP rating:	IP20
Base:	E27

ELECTRICAL

Appliance class:	Class I
Power:	5 x Max 8 W
Voltage:	220-240 Vac
Frequency:	50/60 Hz



DIMMING

Dimmable 0-100%
Recommended dimmer Varilight V-Pro

Tala Energy Ltd. 25b Vyner Street,
London, E2 9DG, United Kingdom

WARRANTY

2 years

Tala Europe B.V. Bertus Aafjeshove 40
Nieuwegein 3437 JN

EAN

5060915715937

tala.co.uk | hello@tala.co.uk | +44 7700 170343

Specification subject to change without notice. Refer to our website for the most recent product documentation. Tala designs in the EU/UK are protected by registered and or unregistered design rights

OVAL II

8W | 720 lm | 2000-2800K

OVAL-II-8W-2000-2800K-E27-MP

Oval II 8W WoD 2000-2800K E27 Matte Porcelain LED Bulb


tala.

Oval II is a larger version of Tala's popular porcelain-style bulb. Optimised to work with Tala's pendants and ceiling light fixtures, the increased size offers a more impressive, eye-catching display.



PHYSICAL


Bulb diameter:	205mm
Bulb length:	174mm
Glass shape:	R205
Base:	E27
Materials:	Glass & nickel
Glass finish:	Matte White
Weight:	290g
Max. working temp.:	-5°C to 40°C
IP rating:	IP54

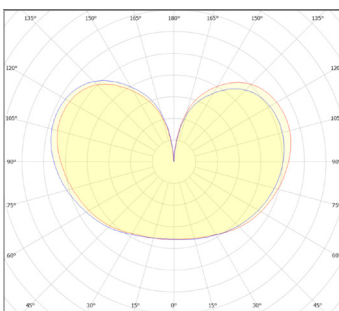

ELECTRICAL

Power:	8W
Current:	0.04A
Voltage:	220-240V~
Frequency:	50/60Hz
Power factor:	0.9
Efficiency:	90
Lifetime:	15,000 hrs

IES/LDT photometry files and product photography available on request



ILLUMINATION

CCT:	2000-2800K
Lumens:	720 lm
Incandescent equiv.:	56W
Flicker:	<5%
Beam angle:	360°
Light source:	LED
CRI:	95Ra
R9:	90
TM30 - Rg	101
TM30 - Rf	95



DIMMING

Dimmable 0-100%
Recommended dimmer: Varilight V-Pro
(For a full list of recommended and compatible dimmers see website)

Tala Energy Ltd. 25b Vyner Street,
London, E2 9DG, United Kingdom

Tala Europe B.V. Bertus Aafjeshove 40
Nieuwegein 3437 JN

LOGISTICAL

Unit Packaging	Outer Carton
PC/Ctn: 1	PC/Ctn: 1
Gross weight: 690g	Gross weight: 0.9kg
L 250 x W 250 x H 260mm	L 270 x W 270 x H 270cm

tala.co.uk | hello@tala.co.uk | +44 7700 170343

Specification subject to change without notice. Refer to our website for the most recent product documentation. Tala designs in the EU/UK are protected by registered and or unregistered design rights

WARRANTY

2 years

EAN

5060915713490