Installation and Maintenance Instructions



Guarantee & Aftercare


When installing or using tools, extra care must be taken to avoid damaging the finish or fitting. To maintain the tap appearance, please ensure it is cleaned regularly using a clean soft damp cloth only. Abrasive cleaners or detergents must not be used as they may cause surface deterioration. The company provides a guarantee against faulty material or manufacturing fault, provided the tap have been installed, maintained and used in accordance with our instructions.

Installation Steps

- 1. Before installation, flush the water supply pipe, Make sure all silt and debris have been removed.
- 2. Screw two (NO. 5) fixing bolts into the M6 screw hole of (NO. 1) tap body, then screw the (NO. 7) two hoses into the two water inlet holes of the tap body respectively And then put the (NO. 2) rubber on the basin mounting hole, finally put the tap body into the basin mounting hole. (Note: do not loss the (NO.2) Rubber washer).
- 3. Install the (NO. 3) Rubber horse shoe washer and (NO. 4) metal horse shoe washer under the basin, then install (NO. 6) fixing nuts, fix the tap body at the middle of the basin with a spanner.
- 4. Connect the G1/2" nuts of two (NO. 7,No8) flexible hoses with the hot water inlet valve and cold water inlet valve respectively.
- 5. Check all joints & connections for leakage.

Maintenance of the product

- 1. When the handle is loose, you can open the cover to tighten the M4 screw with a cross screwdriver. Then, reinstall the cover.
- 2.After using for six months, if the water outlet flow of the tap is reduced, please unscrew the (NO.10) aerator with a (NO.9) plastic spanner. Then, clean the (NO.10) aerator by flushing water through it. Finally, reinstall the (NO.10) aerator.

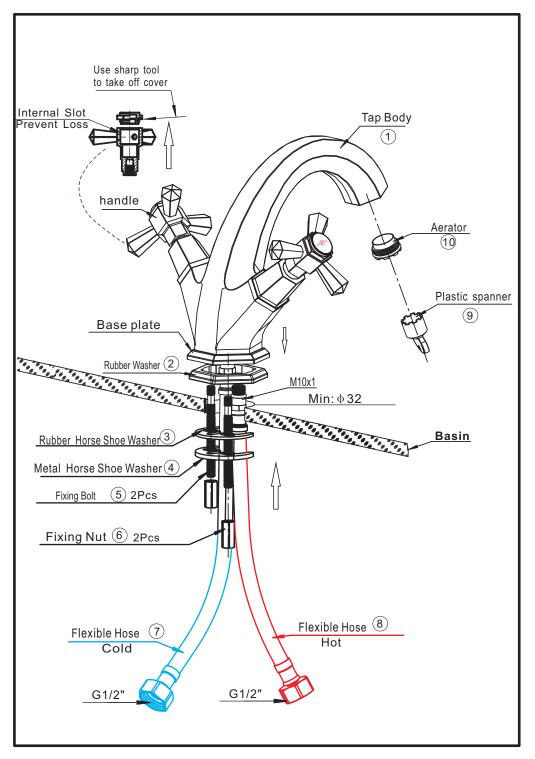

Maintenance/Care and Cleaning Instruction

Maintenance and Cleaning Instructions

The finishes of our products are durable. To keep our products in good condition, the end users are required to regularly maintain and clean all the surfaces based on the following guidelines:

- Warm water or mild soapy water should be used to remove system debris and limescale.
- After cleaning, all soapy water should be removed by water and polished with a clean, soft and dry cloth.
- No abrasive cleaning agents or materials should be used.
- No corrosive cleaning agents should be used, which will cause corrosion.
- More Care should be taken in hard-water areas to ensure all the surfaces are regularly cleaned.
- Failure to do so will invalidate the product warranty.

Care Instructions

Please be careful when installing, using, cleaning and maintaining this product. Any defects or damages like peeling problem at this product due to the following reasons is not covered by the product warranty:

- incorrect installation.
- accidental or wilful misuse.
- inappropriate cleaning products.
- inadequate maintenance.
- Chemical damage caused by system debris and build-up of limescale (any soapy water left on the surface of the product and not cleaned regular will affect the finish of the product.)
- physical damages like scratches.
- damage caused during repair work.
- water quality i.e. rusting water from the pipework need to be fully flushed out after use or water pressure issues.

All products must comply with regulations of Local Water Authority as contained in their by-laws.

If the product is not supplied with balanced pressure, the mixer will not function properly.

Non-return valves should be fitted on both the hot and cold feeds as close to the tap aspossible (non-return valves not provided).