



Item: _____

Quantity: _____

Project: _____

Salamander Broiler

Delux Series

Models: RDSB-24 RDSB-36 RDSB-48



RDSB-36

Gas Type: Natural LP

Elevation (if above 2000 ft.): _____

Range Mount Wall Mount

Range Width: _____"
(Range width necessary to determine bracket type. Width of salamander cannot exceed range width.)

Standard Features

- *Fully welded frame with lifetime warranty*
- *1,200°F mineral wool insulation*
- *Stainless steel interior and exterior*
- *Full width, removable stainless steel crumb pan for easy cleaning*
- *Individually adjustable infra-red burners provide powerful radiant heat*
- *Spring balanced broiler grid moves up and down with positive locking in three positions*
- *Standing pilots for instant safe ignition*
- *Easy loading and unloading with a roll-out carriage*
- *Stainless steel tubing for pilots*


Options and Accessories

- 3/4" gas connection from range to RDSB



2 YEAR LIMITED, PARTS AND LABOR WARRANTY

Salamander Broiler

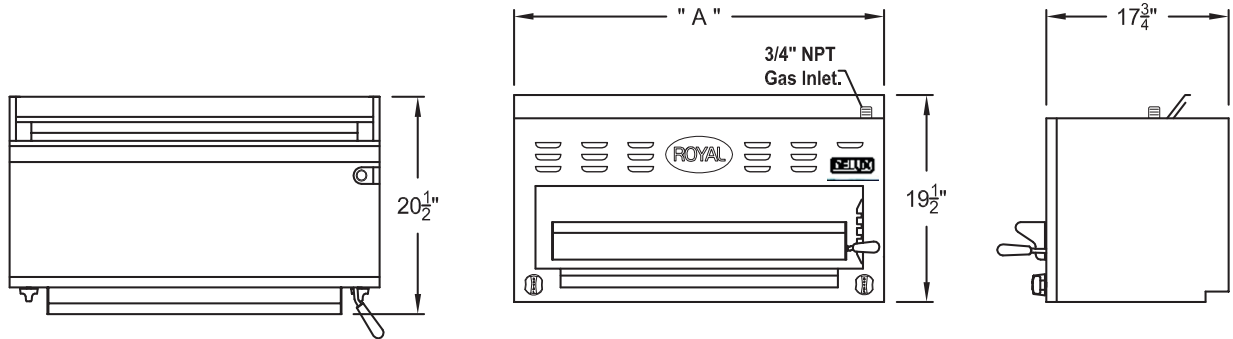

Model Number	Width (A)	Number of Burners	Total BTU	Ship Weight
RDSB-24	24"	1 ¹	17,500	160 lbs.
RDSB-36	36"	2 ¹	35,000	210 lbs.
RDSB-48	48"	2 ²	40,000	252 lbs.

Notes:

1. Infra-red burners rated at 17,500 BTU/hr each.
2. Infra-red burners rated at 20,000 BTU/hr each.

Gas Pressure:

5" W.C.	Natural Gas
10" W.C.	Propane

Gas Connection:

3/4" NPT on the right hand rear of the appliance.
The pressure regulator (supplied) is to be connected by the installer.

Clearances:

	Combustible	Non-Combustible
Rear	4"	0"
Sides	4"	0"

Specify type of gas and altitude, if over 2,000 feet, when ordering.

Due to continuing product development to ensure best possible performance, these specifications are subject to change without prior notification.

Royal Range of California, Inc.
3245 Corridor Dr. • Eastvale, CA 91752 • (800) 769-2414 • (951) 360-1600
Fax: (951) 360-7500 • www.royalranges.com • sales@royalranges.com