

Item:	
Quantity:	
Project: _	

# Royal Series

Models: ☐ RECOD-1 ☐ RECOD-2



**RECOD-1** with optional casters

## Standard Features

- Accommodates full size sheet pans front to back and side to side
- 3 heating elements for a total of 12 KW power
- Electric thermostat adjustable from 150°-500° F
- Two speed motor
- Cool touch controls set back for protection
- Glass window in the right hand door
- Two interior lights
- Oven interior is porcelain coated for easy cleaning
- Doors feature 3 brass bushings per door hinge for perfect door alignment
- Oven doors swing open 135° for easier access for loading and removing pans
- 5 Chrome plated racks standard with 11 positions
- All S/S front, sides, and top construction
- Oven interior useable space: 29" W x 26½" D x 24" H
- Unique stackable design

Voltage:	

<b>☐ 208 - 1 Phase</b>	208 - 3 Phase
<b>□ 240 - 1 Phase</b>	240 - 3 Phase


# **Options and Accessories**

- ☐ Stacking kit to stack two single deck units (includes 6" legs)
- ☐ 5" swivel casters (set of four 2 locking)
- ☐ Extra oven racks (Qty: \_\_\_\_)
- ☐ Glass view door for left side (right is standard)
- ☐ Pan rack (RECOD-1 Only)
- ☐ 480 Voltage 3 Phase
- Moisture injection







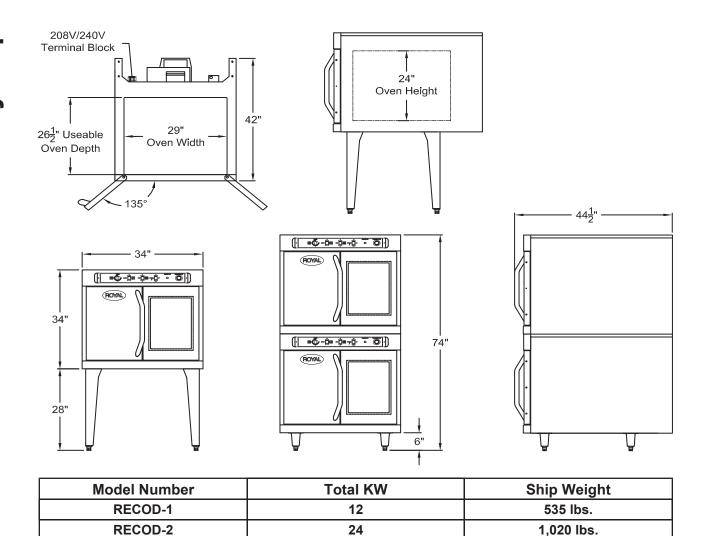

Electrical: Two speed motor (1725/1140 rpm) 230 V, 50/60 Hz,  $\frac{1}{2}$  HP Terminal block for power cord connection with ground lug.

## **Heating Elements:**

14.14. 0.0		=	
Voltage (V)	Phase	Total KW	Current (Amps)
208	1	12	60
208	3	12	L1-35, L2-34, L3-34
240	1	12	50
240	3	12	L1-30, L2-29, L3-29
480	3	12	L1-16. L2-15. L3-15

#### Clearances:

	Combustible	Non-Combustible
Rear	0"	0"
Sides	0"	0"

Due to continuing product development to ensure best possible performance, these specifications are subject to change without prior notification.