


# Installation and operation instruction

1. Prior to installation please ensure all the supply pipes have been through to remove any debris, avoid cartridge damage and blocking .
2. Put flange over the spout.
3. Wrap PTFE tape on the G 1/2 thread (or glue it), then screw on female G 1/2 thread in the wall.
4. Push flange close to the wall.

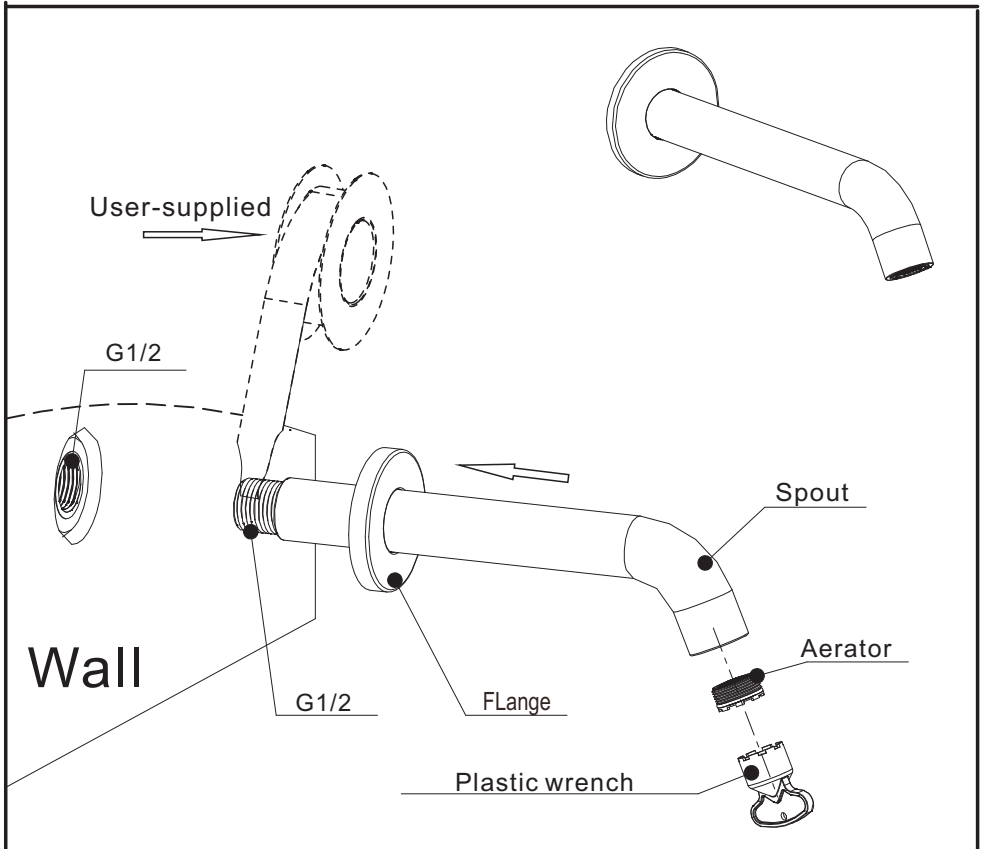

**All products must comply with regulations of Local Water Authority as contained in their by-laws.**

**If the product is not supplied with balanced pressure, the mixer will not function properly. Non-return valves should be fitted on both the hot and cold feeds as close to the tap as possible (non-return valves not provided).**

---