

# UK/EU CORE RECESSED TRIM DOWNLIGHT WET AND FIRE RATED WITH GU10


tala®

SKU: CORE-DL-WT-GU10-2200K-02-EU

CORE-DL-WT-GU10-2700K-02-EU

CORE-DL-WT-GU10-2000-3000K-02-EU

FINISH: WHITE

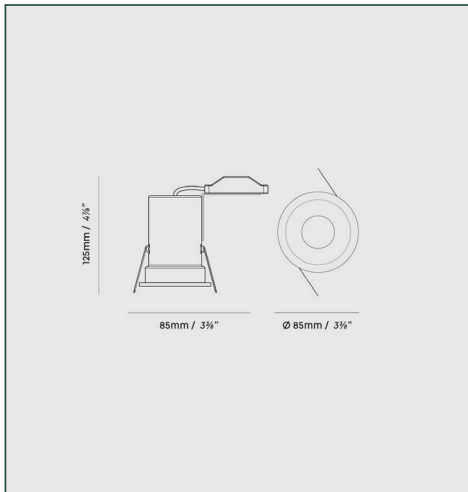

## FIXTURE - PHYSICAL

Fixture dimension:	L 85mm x W 85mm x H 125mm
Materials:	Aluminium
Finish:	White
Weight:	314g
IP rating:	IP56
Base:	GU10

## FIXTURE - ELECTRICAL

Power:	7W
Voltage:	220-240V~
Frequency:	50/60Hz



**WARRANTY** 2 years

**EAN**  
GU10 2200K - 5061046294018  
GU10 2700K - 5061046294025  
GU10 2000-3000K - 5061046294032

Tala Energy Ltd. 25b Vyner Street,  
London, E2 9DG, United Kingdom

Tala Europe B.V. Bertus Aafjeshove 40  
Nieuwegein 3437 JN

tala.co.uk | hello@tala.co.uk | +44 7700 170343

# GU10

7W | 520 lm | 2200K

GU10-7W-2200K-36DEG


GU10 7W 2200K CRI 95 LED Downlight with 36 degree beam angle 240V

tala®



## PHYSICAL

Bulb diameter:	49 mm
Bulb length:	54 mm
Glass shape:	GU10
Base:	GU10
Materials:	ceramic and polycarbonate
Glass finish:	Clear
Weight:	63g
Max. working temp.:	Max. 40°C
IP rating:	IP20




## ELECTRICAL

Power:	7W
Current:	0.03 A
Voltage:	220-240V~ V
Frequency:	50/60Hz
Power factor:	0.9
Efficiency:	75 lm/W
Lifetime:	30000 hrs

## ILLUMINATION

CCT:	2200K
Lumens:	520 lm
Incandescent equiv.:	43W
Flicker:	<5%
Beam angle:	36°
Light source:	LED
CRI:	95Ra
R9:	85
TM30 - Rg	100
TM30 - Rf	90

IES/LDT photometry files  
and product photography  
available on request



## DIMMING

Dimmable 0-100%  
Recommended dimmer: Varilight V-Pro  
(For a full list of recommended and compatible  
dimmers see website)

Tala Energy Ltd. 25b Vyner Street,  
London, E2 9DG, United Kingdom

Tala Europe B.V. Bertus Aafjeshove 40  
Nieuwegein 3437 JN

## WARRANTY

2 years

tala.co.uk | hello@tala.co.uk | +44 7700 170343

## EAN

5061046292090

Specification subject to change without  
notice. Refer to our website for the most  
recent product documentation. Tala  
designs in the EU/UK are protected by  
registered and or unregistered design rights

# GU10

7W | 580 lm | 2700K

GU10-7W-2700K-36DEG

GU10 7W 2700K CRI 95 LED Downlight with 36 degree beam angle 240V

tala.



## PHYSICAL

Bulb diameter:	49 mm
Bulb length:	54 mm
Glass shape:	GU10
Base:	GU10
Materials:	ceramic and polycarbonate
Glass finish:	Clear
Weight:	63g
Max. working temp.:	Max. 40°C
IP rating:	IP20




## ELECTRICAL

Power:	7W
Current:	0.03 A
Voltage:	220-240V~ V
Frequency:	50/60Hz
Power factor:	0.9
Efficiency:	85 lm/W
Lifetime:	30000 hrs

## ILLUMINATION

CCT:	2700K
Lumens:	580 lm
Incandescent equiv.:	47W
Flicker:	<5%
Beam angle:	36°
Light source:	LED
CRI:	95Ra
R9:	75
TM30 - Rg	100
TM30 - Rf	90

IES/LDT photometry files  
and product photography  
available on request



## DIMMING

Dimmable 0-100%  
Recommended dimmer: Varilight V-Pro  
(For a full list of recommended and compatible  
dimmers see website)

Tala Energy Ltd. 25b Vyner Street,  
London, E2 9DG, United Kingdom

Tala Europe B.V. Bertus Aafjeshove 40  
Nieuwegein 3437 JN

## WARRANTY

2 years

tala.co.uk | hello@tala.co.uk | +44 7700 170343

## EAN

5061046292083

Specification subject to change without  
notice. Refer to our website for the most  
recent product documentation. Tala  
designs in the EU/UK are protected by  
registered and or unregistered design rights

# GU10

7W | 600 lm | 2000-3000K

GU10-7W-2000-3000K-36DEG


GU10 7W 2000K to 3000K LED Downlight with 36 degree beam angle 240V

tala®



## PHYSICAL

Bulb diameter:	49 mm
Bulb length:	54 mm
Glass shape:	GU10
Base:	GU10
Materials:	ceramic and polycarbonate
Glass finish:	Clear
Weight:	63g
Max. working temp.:	Max. 40°C
IP rating:	IP20




## ELECTRICAL

Power:	7W
Current:	0.03 A
Voltage:	220-240V~ V
Frequency:	50/60Hz
Power factor:	0.9
Efficiency:	85 lm/W
Lifetime:	30000 hrs

## ILLUMINATION

CCT:	2000-3000K
Lumens:	600 lm
Incandescent equiv.:	48W
Flicker:	<5%
Beam angle:	36°
Light source:	LED
CRI:	95Ra
R9:	85
TM30 - Rg	100
TM30 - Rf	90

IES/LDT photometry files  
and product photography  
available on request

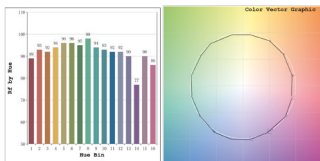

## DIMMING

Dimmable 0-100%  
Recommended dimmer: Varilight V-Pro  
(For a full list of recommended and compatible  
dimmers see website)

Tala Energy Ltd. 25b Vyner Street,  
London, E2 9DG, United Kingdom

Tala Europe B.V. Bertus Aafjeshove 40  
Nieuwegein 3437 JN

## WARRANTY

2 years

tala.co.uk | hello@tala.co.uk | +44 7700 170343

## EAN

5061046292175

Specification subject to change without  
notice. Refer to our website for the most  
recent product documentation. Tala  
designs in the EU/UK are protected by  
registered and or unregistered design rights