



AUS/NZL

Mountain Buggy Australasia 102-112 Daniell Street Newtown, Wellington 6021 New Zealand +64 4 3800 833

GBR

Mountain Buggy UK 4 Airedale Close Flitwick, Bedfordshire MK45 1FA United Kingdom

EUR/FRA


Mountain Buggy Spain Calle Linaje, 3 Malaga 29001, Spain +34 91 290 1482

Designed in New Zealand. Made in China Conçu en Nouvelle Zélande. Fabriqué en Chine


Conforme aux exigences de sécurité

protect™ **i-Size** instructions


for detailed instructions please visit: mountainbuggy.com



8508-01

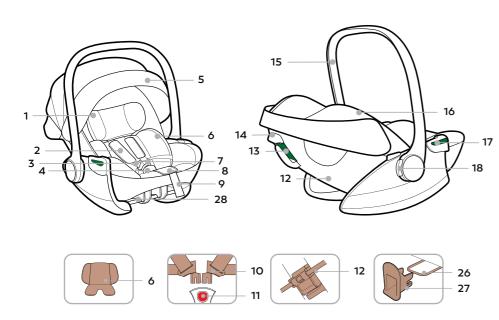



Protect v5 infant carrier Enhanced Child Restraint System (ECRS)




- Shoulder Straps
- Crotch Pad
- 5 Sunhood
- 6 Newborn Insert
- 7 Harness Buckle
- 8 Adjustment Button

- 9 Adjustment Strap
- 10 Buckle Tongues
- 11 Red Release Button
- 12 Headrest Height Adjuster
- 13 Shoulder Belt Guidance
- 14 Recline Handle
- 15 Handle
- 16 Seat Cover
- 17 Lap Belt Guidance
- 18 Adjustment Buttons
- 19 Rotation Adjuster
- 20 Support Leg
- 21 Adjustment Buttons
- 22 Base Indicators
- 23 Release Button
- 24 ISOFIX Buttons
- 25 ISOFIX Locking Arms
- 26 ISOFIX Fastening Points (vehicle)
- 27 ISOFIX Insertion Aids (optional)
- 28 Metal Bars
- 29 Separate Blackout Cover (not pictured)











Handle 1 2 Sunhood

















Separate Blackout Cover (29)



★ WARNING! Use only under parent supervision. Monitor child to avoid overheating, especially in sunny weather and when using in the vehicle.

safe recline use



approval

These instructions use the following symbols:


| Symbol | Keyword | Explanation |
|-------------|----------|--------------------------------|
| \triangle | DANGER! | RISK of severe personal injury |
| \triangle | WARNING! | RISK of minor personal injury |
| \triangle | CAUTION! | RISK of material damage |
| 1 | TIP! | Useful notes |
| | | |

The protect $\!\!\!^{_{\! 12}}\!\!\!$ is exclusively intended to secure your child in your vehicle.

| Rearwa | Never use the | |
|-------------------|-----------------------------------|---------------------------------|
| Body Size | Installation method | infant carrier facing forwards. |
| 40-87CM; ≤13kg | ISOFIX + Support leg + Harness | |

This infant carrier has been designed, tested and approved according to the requirements of the European Standard for Child Safety Equipment R129/04. This infant carrier may only be used to secure a child in the vehicle.





This ECRS is suitable for vehicles equipped with the ECE R14 requirements. The car seat base is only for use with an ISOFIX anchorage system.

Handle

1. Hold down both **Adjustment Buttons** (18). Adjust **Handle** (15) to desired position, then release **Adjustment Buttons** (18). Ensure that the **Handle** (15) is locked with a clicking sound.

- 2. You can adjust the **Handle** (15) in four positions:
- A, B, C and D as shown:
- A For inside/outside and when travelling in the car.
- B For child access
- C For placing your child.
- D For setting the infant carrier down safely outside the car.

2 Sunhood

The **Sunhood** (5) protects your child's head from harsh sunlight.

Extend to open and push back to close.

The **Blackout Cover** (29) provides more protection and is a breathable cover for sleep and privacy.

3 Seat Angle

1. You can adjust the **Recline Handle** (14) in four recline positions 1, 2, 3 and 4 as shown:

1-2 For travelling in the car.

- 1-4 For outside the car or attached to a stroller.
- 2. Pull the **Recline Handle** (14) and pull the seat outward, then the infant Carrier can be adjusted.

4. Rotation

- 1. Pull the **Rotation Adjuster** (19), rotate the seat shell to 90° for easy loading and unloading of the child.
- 2. After loading, rotate the seat shell so it is facing backwards until it engages with a clicking sound.
- ▲ DANGER! The seat MUST be engaged in the rearward facing position before driving the vehicle.



ISOFIX base

Facing backwards (40-87cm) Installation

Install the Base with ISOFIX + Support leg.

- 1. Extend the **Support Leg** (20) out from inside the bottom of the base of the child safety seat.
- 2. If your vehicle is not fitted with ISOFIX Insertion Aids as standard, clamp the two ISOFIX Insertion Aids (27), (which are included), with the opening pointing upwards, to the two ISOFIX Fastening

Points (26) of your vehicle. If you don't have ISOFIX Insertion Aids (27), please ignore this step.

- TIP! The ISOFIX fastening points are located between the surface and the backrest of the vehicle seat.
- 3. Press the **ISOFIX Buttons** (24) to push out the two **ISOFIX Locking Arms** (25) from the seat base.
- 4. Push back the Base until the Base is firmly against the vehicle seat then you will hear a clicking sound which indicates they are fully engaged. Ensure the ISOFIX indicators turn from red to green on both sides.
- Press both Adjustment Buttons (21) and pull out the Support Leg (20) until it makes firm contact with vehicle floor and the support leg indicators are green.

Make sure the base is installed at correct angle of $45^{\circ}\pm 5^{\circ}$ for the infant carrier seat back.

Securing your baby

1. Loosen the **Shoulder Straps** (3) by pressing the **Adjustment Button** (8) and pull both shoulder straps forwards.

- 2. Press Red Release Button (11) to open the Harness Buckle (7). Move the harness straps to the side to place the child in the seat.
- 3. Bring both **Buckle Tongues** (10) together. Lock **Buckle Tongues** (10) in **Harness Buckle** (7) with a clicking sound.
- 4. Pull the Headrest Height Adjuster (12), select the correct height of the Headrest (1) and engage it in a position that fits your child by releasing the adjuster. Make sure the distance between child's shoulder and the bottom of the headrest is less than one finger.
- 5. Pull the **Adjustment Strap** (9) until the strap lies flat and snug on your child's body. Make sure **Shoulder Straps** (3) are slightly higher or equal to child's shoulders.

 ★ WARNING! Place shoulder straps tight to the child's body.

Installation of the infant carrier

1. Put the infant carrier on the base, insert the **Metal Bars** (28) into slot, then you will hear a clicking sound. Ensure that both sides of the **Base Indicators** (22)

turn from red to green. Never use the infant carrier facing forwards.

2. If using without the base, check the horizontal logo on the lower part of infant carrier and make sure the green line on the logo is parallel with the vehicle seat.

When the car is driving, the handle should be in the A position.

WARNING! Before each car journey, in order to ensure your child's safety. make sure that:

The seat base is fastened in the ISOFIX fastening points on both sides with the ISOFIX locking arms and both ISOFIX buttons are fully green:

The infant carrier is securely fastened;

The harness of the infant carrier is fitted snugly to the child's body without being constricting and should not be twisted:

The shoulder straps are correctly adjusted and the straps are not twisted:

The shoulder pads are in the correct position on your child's body:

The infant carrier is facing in the right direction for your child's age/size;

The buckle tongues are inserted into the harness buckle.

Remove from vehicle

Lift the **Release Button** (23), ensure the **Handle** (15) is in position B then remove the infant carrier.

- 1. Shorten **Support Leg** (20): Press the **Adjustment Buttons** (21) to push back into **Support Leg** (20).
- 2. Release ISOFIX Button (24) towards each other to loosen the ISOFIX Fastening Points (26) on both sides. Move the ISOFIX Locking Arms (27) back into the seat base.
- 3. Remove the base and secure **Support Leg** (20) into the base.

6. Clean

Fabric cover

Only use authentic seat covers. The **Seat Cover** (16) is an integral part of the child safety seat and is key to ensure the trouble-free functionality of the system. Replacement seat covers are available from your retailer.

- 1. Open the Harness Buckle (7).
- 2. Remove Shoulder Pads (2) and Crotch Pad (4).

3. Lift a corner of the **Sunhood** (5) then you can remove the **Seat Cover** (16).

The cover can be removed and washed with a mild detergent in a washing machine.

The **Newborn Insert** (6) can be washed in the same way as the cover. Remove all foam parts from the top and bottom sections before washing. These must not be washed.

TIP! When you use infant carrier, make sure the newborn insert sits underneath the shoulder straps. Make sure that the newborn insert is in contact with the backrest of the infant carrier.

▲ WARNING! Use the newborn insert when your baby is 40-60cm. Remove the newborn insert when your baby is >60cm.

Harness Buckle

1. Remove the strap from the plastic bar, then remove **Harness Buckle** (7) from base.

To ensure the safety of your child, it is absolutely essential that the harness buckle continues to function correctly.

Harness buckle malfunctions are usually caused by a build-up of soiling or by external objects:

- When you press the Red Release Button (11), it takes a long time for the Buckle Tongues (10) to be ejected.
- The **Buckle Tongues** (10) no longer engage (i.e. when you try to push them in, they pop out again).
- The Buckle Tongues (10) engage without a clicking sound.
- The **Buckle Tongues** (10) are difficult to push in (If you feel a certain amount of resistance).
- The Harness Buckle (7) only opens if extreme force is applied.

Remedy: Soak the harness buckle in warm water containing washing-up liquid for at least an hour. Rinse the buckle thoroughly and dry it.

The plastic parts and the harnesses can be cleaned with soapy water. Do not use any caustic cleaning agents (such as solvents).

disposal

Please observe the waste disposal regulations in your country.

| Disposal of packaging | Container for cardboard boxes |
|-----------------------|--|
| Seat cover | Residual waste, waste incineration |
| Plastic parts | To be placed in the corresponding container according to labelling |
| Metal parts | Container for metals |
| Belt straps | Container for polyester |

safety notes

NOTICE

Notice regarding i-Size category Enhanced Child Restraint Systems (40-87cm)

This is an i-Size Enhanced Child Restraint System. It is approved according to UN Regulation No. 129, for use in, i-Size compatible vehicle seating positions as indicated by vehicle manufacturers in the vehicle user's manual.

If in doubt, consult either the Enhanced Child Restraint System manufacturer or the retailer.

↑ DANGER!

Please carefully read and make sure you understand all instructions in this manual and in the vehicle handbook relating to child safety seats. Install and use the child safety seat as described in the instruction manual. Failure to do this could result in serious injury or even death of your child. Keep the instructions together with the ECRS for future reference.

△ DANGER!

Because of potential medical issues inherent to low birth weight and premature infants, always have a trained professional doctor or hospital staff assess the suitability of the ECRS prior to leaving the hospital or using the ECRS.

MAKE SURE any straps holding the ECRS to the vehicle are tight. Any straps restraining the child should be adjusted to the child's body. Make sure straps are not twisted.

HOT! The child seat should be kept away from sunlight if the seat is not provided with a textile cover, otherwise it may be too hot for a child's skin.

DO NOT leave your child unattended in this restraint even for a short time.

DO NOT leave your child in this restraint with harness undone

DO NOT leave your child unsupervised in the vehicle, for the temperature in a vehicle can rise dangerously quickly. Take breaks and take the child out of the infant carrier as often as possible, if you are on long journeys. It will be good for your child's spine.

MAKE SURE any luggage or other objects liable to cause injuries in the event of a collision are properly secured.

A) DO NOT use the ECRS without the cover.

B) **DO NOT** replace seat cover with any other than the one recommended by the manufacturer, because the cover constitutes an integral part of the restraint performance.

ONLY use rearward facing installation (refer to instruction).

MAKE SURE the rigid items and plastic parts of an ECRS are located and installed so that they are not liable, during everyday use of the vehicle, to become trapped by a movable seat or in a door of the vehicle.

MAKE SURE the ECRS is changed when it has been subject to violent stresses in an accident.

DO NOT make any alteration or additions to the ECRS without the approval of the Type Approval Authority, and it may be dangerous if you do not closely follow the installation instructions provided by the ECRS manufacturer.

⚠ WARNING!

The safest place for your baby is the rear of your car. Airbags are designed to protect adults. The use of a front airbag with an infant carrier can lead to fatal injuries.

warranty

All of our products have a 3 year limited warranty from date of purchase against defects in material and workmanship. To receive this warranty, you must register your product online with us, within 30 days of purchase, at mountainbuggy.com/register "you may be entitled to other rights in some countries.

© 2025 Phil and Teds Design Limited.

Phil and Teds Design Limited owns the intellectual property rights in the brands, designs and inventions featured in this publication as licensed to Phil and Teds Most Excellent Buggy Company Limited. These include, without limitation, the Mountain Buggy, life without limit trade marks and product names. Phil and Teds actively pursue people who infringe on its intellectual property.