



supamag[®] : SUPERIOR MAGNETIC TAPE

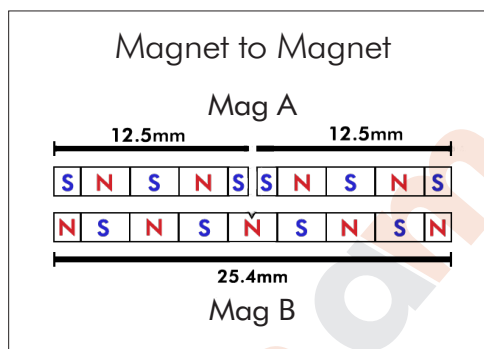

Magnetically aligned, specifically for magnet to magnet use

- Manufacturing process: extruded
- Material composition: 90% ferrite, 10% thermoplastic binder, free of PVC & phthalates
- Adhesive: N/A (See separate adhesive document)
- Magnetisation: one face only, UV coated
- Pole pitch: 3.125mm (MAG A) with (MAG B)
- Density: 3.6g/cm³
- Colour: dark brown with clear UV coating applied to magnetic face
- Hardness: (Shore-D) 33±5
- Working Face: (MAG A) the plain UV face, (MAG B) the grooved UV face
- Magnetic stability: immune to magnetic damage in normal use
- Working temperature: -10°C to 60°C above which, performance will reduce
- Storage temperature: between 10°C and 40°C
- Compliance: **supamag**[®] tape conforms to EN71, part 3 and is REACH & RoHS approved
- Packaging: normally in dedicated cartons

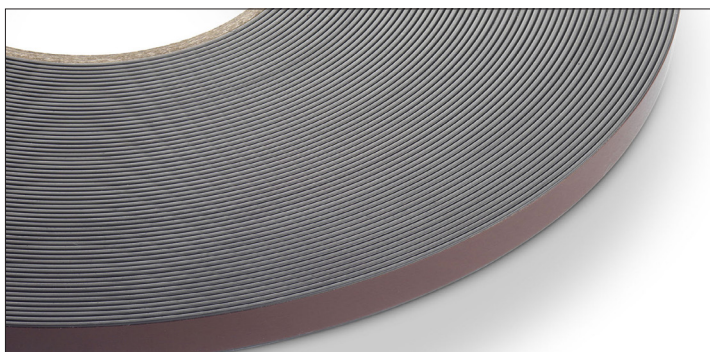

MORE INFORMATION

www.anchormagnets.com/pages/supamag%C2%AE-superior-magnetic-tape

Disclaimer:

Published technical information concerning our products is based upon research, which, to the best of our company's knowledge & belief, is accurate & reliable.

Whilst the guidelines above will assist the purchaser in considering the suitability & performance of the product for each intended use, it remains the user's responsibility to satisfy themselves as to the suitability of such information for each particular use.

Therefore, Anchor Magnets Ltd & Anchor Magnets Europe, accepts no liability in the event of improper use or processing beyond our guidelines.