



SLZ12V100S

LiFePO₄ 12V 100Ah

SPECIFICATION / TECHNICAL SHEET

Specifications		
Nominal Voltage	12.8V	
Nominal Capacity (25°C, 0.33C)	100Ah	
Dimensions	Length	306±3mm
	Width	167±3mm
	Height	211±3mm
	Total Height	211±3mm
Approx. Weight	12.8kg	
Characteristics		
Terminal type	M8	
Max Charge Voltage	14.6V±0.2V	
Standby Voltage	13.8±0.2V	
Cut-off Voltage	10V	
Max. Discharge Current	100A	
Max Pulse Discharge Current (3 sec)	300A	
Max Charge Current	100A	
Recommended Charge Current	< 50A	
Cycle Life (100% DoD)	1800+	
Operating Temp - Charge	0°C - 45°C	
Operating Temp - Discharge	-20°C - 60°C	
Short Circuit Release	Yes	
Max. Series / Parallel Configuration	4S or 4P	
Cell Type	Prismatic	
Cell Chemistry	Lithium Iron Phosphate (LiFePO ₄)	
BMS Protection	Yes	
Warranty	5 Years	
Applications		
<ul style="list-style-type: none">• Deep-cycle• 4x4 Vehicles• Recreational Vehicles• Caravan / Camping• Fast Recharge Requirements• Low Weight Applications• Marine• Golf Carts• Personal Power• Non-Starting		



About Zeal Lithium

Zeal lithium is an economical 12V Lithium Iron Phosphate (LiFePO₄) solution by Sealed Performance Batteries (SPB) which provides the core performance and safety advantages of a modern lithium battery in a well-built design.

Backed by SPB, a company with over 25 years of experience in the energy storage industry, and designed to the best possible specifications, you can be confident that Zeal lithium has had every detail thoroughly examined in delivering a high-value solution.

Safe And Stable

Zeal provides a high degree of safety by utilising light-weight aluminum encased LiFePO₄ prismatic cells, which are among the safest and most stable lithium cells available.

It is also supported by an integrated BMS that protects against overcharge/discharge, temperature and short circuit events for complete confidence when in operation.

Core Lithium Advantages

A perfect AGM replacement, Zeal comes complete with a 5 year warranty and all the features you would expect from a LiFePO₄ product including fast recharge capabilities, low self-discharge rate, long runtime and more usable capacity for power when you need it most.

Need a larger solution? Up to 4 batteries can also be connected in parallel or series configurations to meet the needs of more demanding systems.




SPB National Head Office: 1 Ant Road, Yatala, Brisbane, QLD 4207, Australia
SPB Melbourne Office: 3, 35 Dunlop Road, Mulgrave, VIC, 3170, Australia
SPB Sydney Office: 12/28 Prime Drive, Seven Hills, NSW, 2147, Australia
T 1300 001 772 E info@spb.net.au W spb.net.au




SLZ12V100S

LiFePO₄ 12V 100Ah


Discharge Curve at Different C Rates

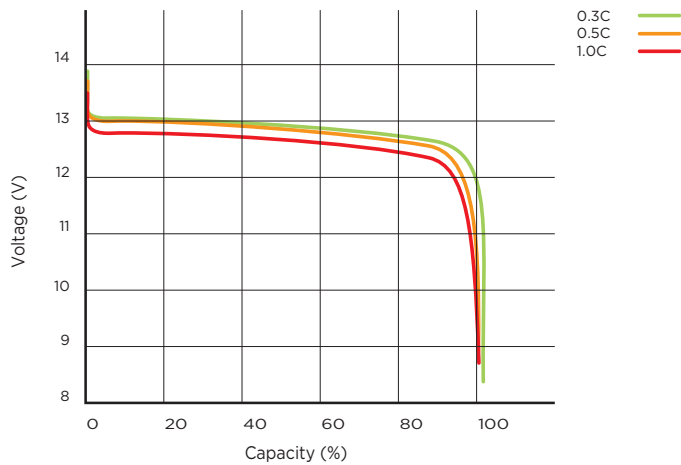


Charging Characteristic (25°C @ 0.33C)

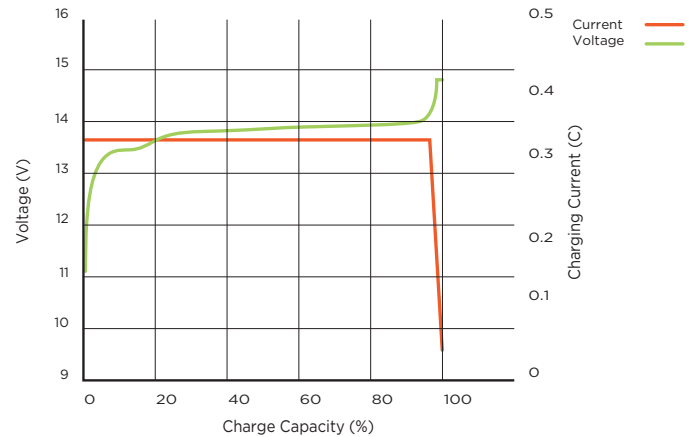

Cycle Life at Different DoD

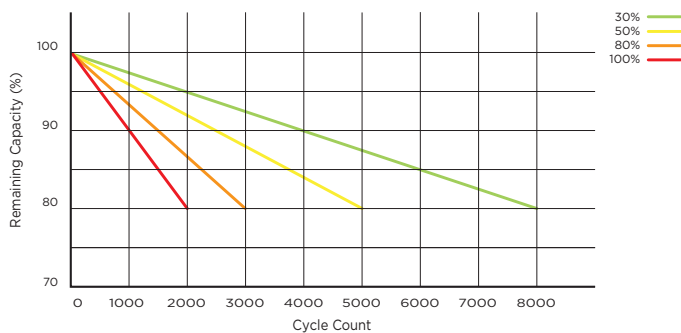

Discharge Curve at Different Ambient Temperature (0.33C)

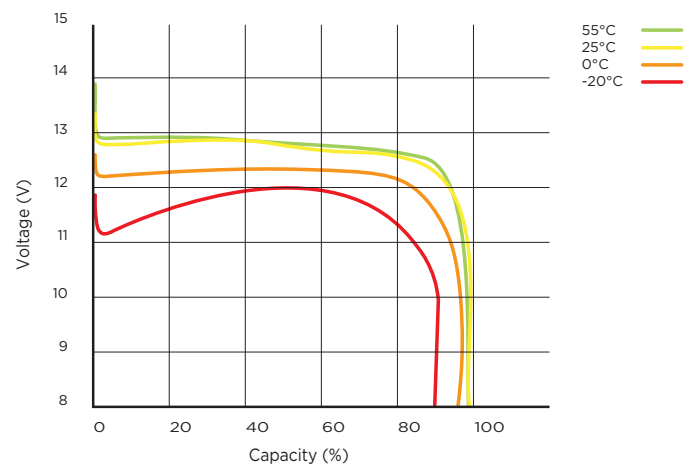

For pricing and availability please contact the team at
SPB on 1300 001 772 or sales@spb.net.au



SPB National Head Office: 1 Ant Road, Yatala, Brisbane, QLD 4207, Australia
SPB Melbourne Office: 3, 35 Dunlop Road, Mulgrave, VIC, 3170, Australia
SPB Sydney Office: 12/28 Prime Drive, Seven Hills, NSW, 2147, Australia
T 1300 001 772 E info@spb.net.au W spb.net.au