



PS-12850 12 Volt 85.0 AH

Rechargeable Sealed Lead Acid Battery



Features

- Absorbent Glass Mat (AGM) technology for superior performance
- Valve regulated, spill proof construction allows safe operation in any position
- Power/volume ratio yielding unrivaled energy density
- Rugged impact resistant ABS case and cover (UL94-HB)
- Integrated ABS carrying handles for ease of movement
- Approved for transport by air. D.O.T., I.A.T.A., F.A.A. and C.A.B. certified
- U.L. recognized under file number MH 20845

Performance Specifications

Nominal Voltage 12 volts (6 cells)

Nominal Capacity

20-hr. (5A to 10.50 volts)	94.0 AH
10-hr. (9.2A to 10.50 volts)	86.0 AH
5-hr. (15.8A to 10.20 volts)	73.0 AH
1-hr. (55.2A to 9.00 volts)	49.0 AH
15-min. (175A to 9.00 volts)	39.0 AH

Approximate Weight 68.00 lbs. (30.84 kg)

Energy Density (20-hr. rate) (106.62W-h/l)

Specific Energy (20-hr. rate) (36.58 W-h/kg)

Internal Resistance (approx.) 5 milliohms

Max Discharge Current (7 Min.) 375.0 amperes

Max Short-Duration Discharge Current (10 Sec.)..... 725.0 amperes

Shelf Life (% of nominal capacity at 68 °F (20 °C))

1 Month	97%
3 Months.....	91%
6 Months	83%


Operating Temperature Range

Charge..	-4 °F (-20 °C) to 122 °F (50 °C)
Discharge.....	-40 °F (-40 °C) to 140 °F (60 °C)

Case ABS Plastic

Power-Sonic Chargers.....PSC-1210000A-C


Physical Dimensions: in (mm)

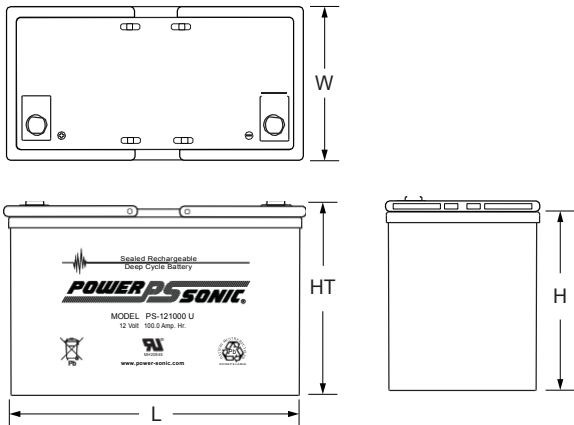


L: 12.00 (305) W: 6.60 (168) H: 8.15 (207) HT: 8.98(228)

Tolerances are +/- 0.04 in. (+/- 1mm) and +/- 0.08 in. (+/- 2mm) for height dimensions. All data subject to change without notice.

Discharge Time vs. Discharge Current

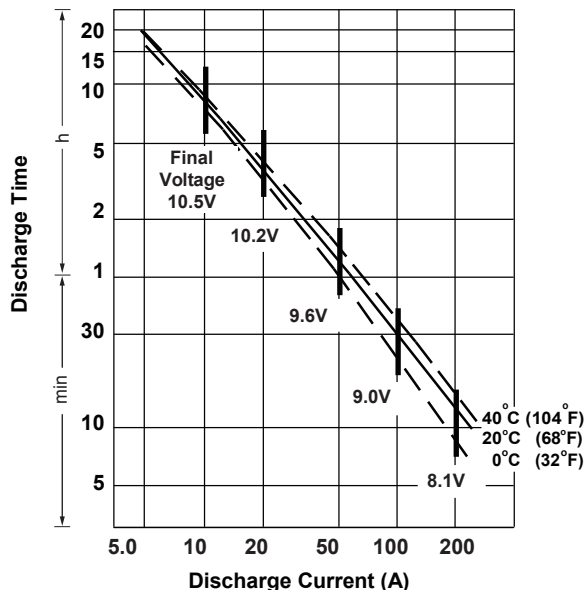

Discharge Characteristics

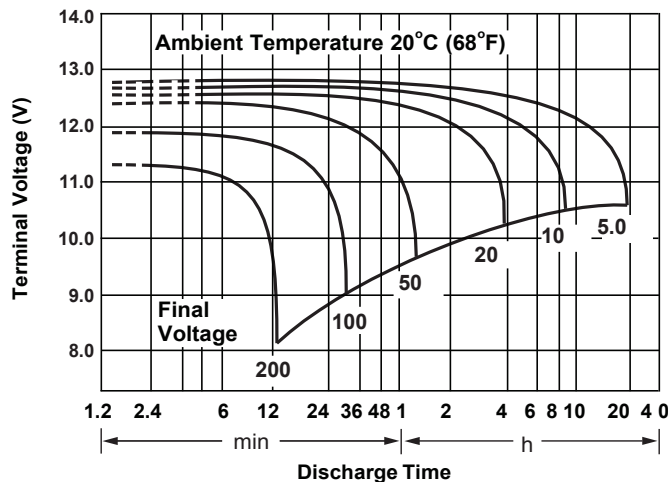


Charging

Cycle Applications: Limit initial current to 20A. Charge until battery voltage (under charge) reaches 14.4 to 14.7 volts at 68°F (20°C). Hold at 14.4 to 14.7 volts until current drops to under 1A. Battery is fully charged under these conditions, and charger should be disconnected or switched to “float” voltage.

“Float” or “Stand-By” Service: Hold battery across constant voltage source of 13.5 to 13.8 volts continuously. When held at this voltage, the battery will seek its own current level and maintain itself in a fully charged condition.

Note: Due to the self-discharge characteristics of this type of battery, it is imperative that they be charged within 6 months of storage, otherwise permanent loss of capacity might occur as a result of sulfation.

Shelf Life & Storage

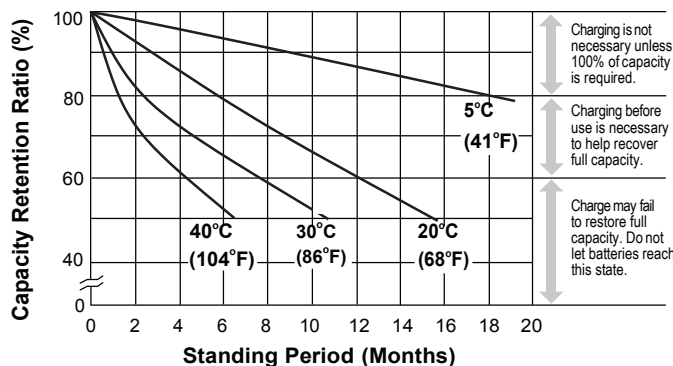

Chargers

Power-Sonic offers a wide range of chargers suitable for batteries up to 100AH. Please refer to the Charger Selection Guide in our specification sheets for “C-Series Switch Mode Chargers” and “Transformer Type A and F Series”. Please contact our Technical department for advice if you have difficulty in locating suitable models.

Further Information

Please refer to our website www.power-sonic.com for a complete range of useful downloads, such as product catalogs, material safety data sheets (MSDS), ISO certification, etc..



Sealed Performance Batteries

Brisbane, National Head Office
1 Ant Road, Yatala
Queensland, 4207
Australia

Melbourne
3/35 Dunlop Road, Mulgrave
Victoria, 3170
Australia

Sydney
1/1 Forge St, Blacktown
New South Wales, 2148
Australia

Tel: 1300 001 772
Email: sales@spb.net.au

Further Information

Please refer to our website www.spb.net.au for a complete range of useful downloads, such as product catalogs, material safety data sheets (MSDS), ISO certification, etc.

*Product available on request
**To ensure safe and efficient operation always refer to the latest edition of our Technical Manual, as published on our website.
© 2018, Power-Sonic Corporation. All rights reserved. All trademarks are the property of their respective owners.
All data subject to change without notice. E&O.E