



PL-86A23TS

Single Handle
Bath Shower

Features

- NPT Connection
- Premium Metal Construction with Easy Clean Surface
- Single Lever Handle Allows for On/Off Activation
- 2.5 gal/min (9.5 l/min) Maximum Flow Rate [Max at 80 psi (5.6 bar)]
- Adjustable Temperature Limit Stop to Control Maximum Hot Water Temperature
- Hot/Cold Indexing on Handle
- Flexible Supplies for Simplified Installation



Material

- Premium Metal Construction
- Finishing Resists Corrosion and Tarnishing






Available Color/Finishes

Intended for reference only

Installation


- Includes Valves for Installation

Color	Description
	Chrome
	Brushed Nickel
	Matte Black

6140 Ulmerton Road Clearwater, FL 33760
Phone: (727) 388-9895
Fax: (727) 362-1281

For the most current Specification Sheet, go to www.pelicansinks.com



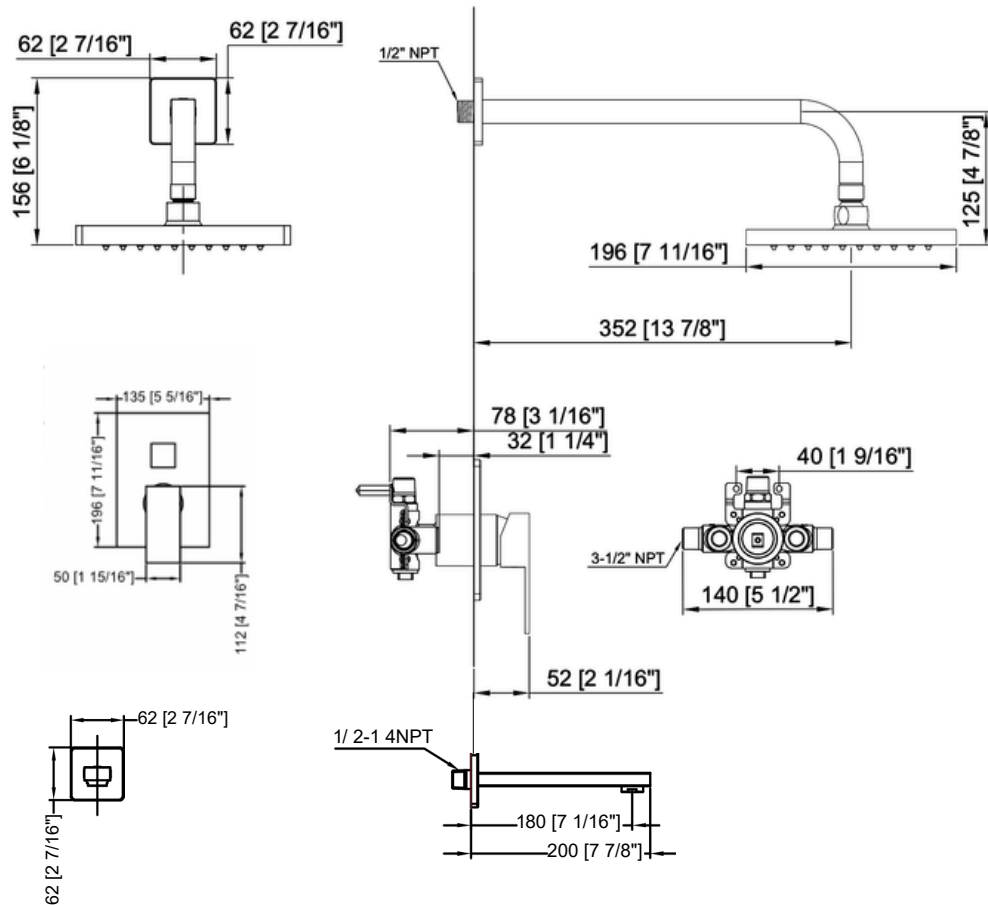

Technical Information

All product dimensions are nominal

Spout

Spout Length: 13 7/8"

Tub Spout Reach: 7 1/16"

Faucet

Shower Flow Rate: Max 2.5 gal/min (9.5 l/min)

Pressure: 80 psi (5.6 bar)

Spout Flow Rate: Min 2.4 gal/min (9.0 l/min)

Pressure: 20 psi (1.4 bar)

Valve Body: Lead Free Brass

Installation Information

Install this product according to the installation instructions.

Limited Lifetime Warranty

See website for detailed warranty information.

JOB INFORMATION

JOB NAME: _____ MODEL SPECIFIED: _____ QUANTITY: _____
 DATE: _____ ARCHITECT/ENGINEER: _____
 CUSTOMER: _____ CONTRACTOR: _____

6140 Ulmerton Road Clearwater, FL 33760

Phone: (727) 388-9895

Fax: (727) 362-1281

For the most current Specification Sheet, go to www.pelicansinks.com