



## PL-86S22TS

Single Handle  
Bath Shower

### Features

- 1/2-14NPT Connection
- Shower Head / Hand Shower Flow Rate: Max 2.5gpm/80psi
- Spout Flow Rate 2.4gpm/20psi
- Premium Metal Construction with Easy Clean Surface
- Single Lever Handle Allows for On/Off Activation
- Flow Rate Complies with WaterSense Guidelines
- Adjustable Temperature Limit Stop to Control Maximum Hot Water Temperature
- Hot/Cold Indexing on Handle
- Flexible Supplies for Simplified Installation





### Material

- Premium Metal Construction
- Finishing Resists Corrosion and Tarnishing

### Available Color/Finishes

Intended for reference only

Color	Description
	Chrome
	Brushed Nickel

### Installation

- Includes Valves for Installation

6140 Ulmerton Road Clearwater, FL 33760  
Phone: (727) 388-9895  
Fax: (727) 362-1281


For the most current Specification Sheet, go to [www.buildpelican.com](http://www.buildpelican.com)





# PL-86S22TS

## Single Handle Bath Shower

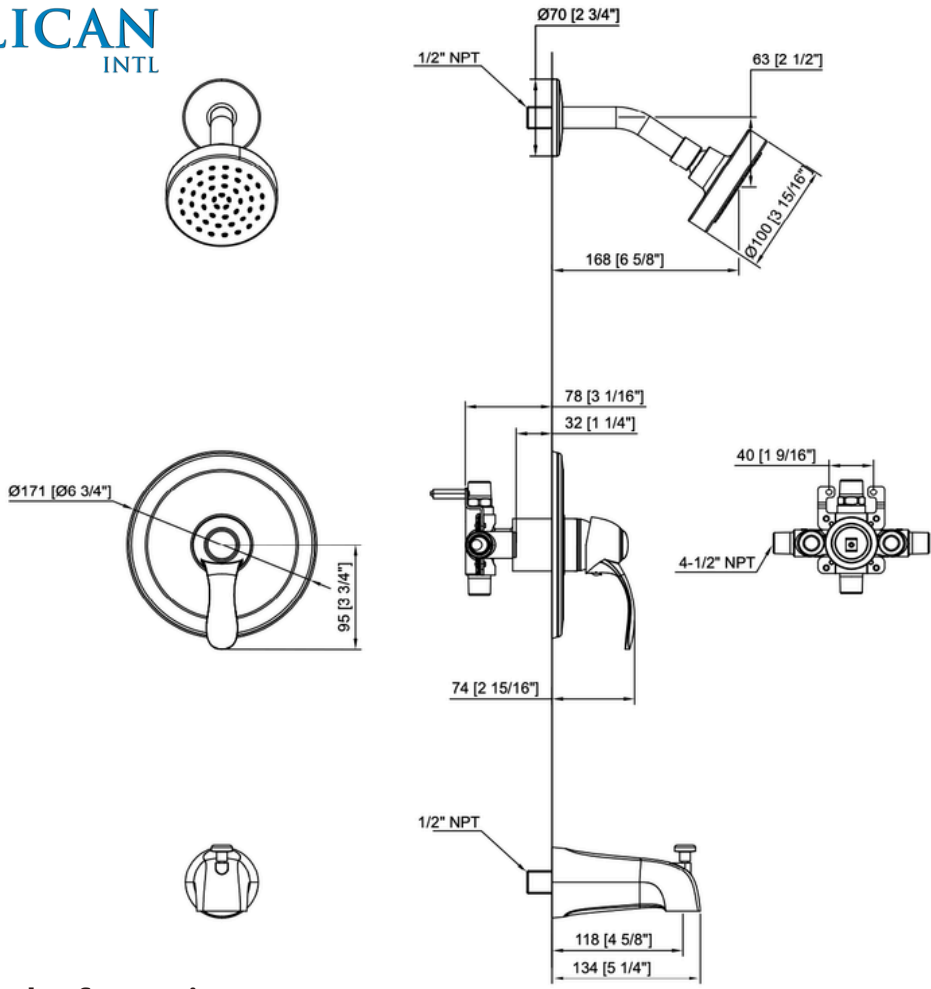

### Technical Information

All product dimensions are nominal

Valve Body: Lead Free Brass

#### Spout

Spout Length: 6 5/8"

#### Faucet

Shower Flow Rate: Max 2.5gpm / 80psi

Hand Shower Flow Rate: Max 2.5gpm / 80psi

Spout Flow Rate: 2.4gpm / 20psi

### Installation Information

Install this product according to the installation instructions.

### Limited Lifetime Warranty

See website for detailed warranty information.

### JOB INFORMATION

JOB NAME: \_\_\_\_\_ MODEL SPECIFIED: \_\_\_\_\_ QUANTITY: \_\_\_\_\_  
 DATE: \_\_\_\_\_ ARCHITECT/ENGINEER: \_\_\_\_\_  
 CUSTOMER: \_\_\_\_\_ CONTRACTOR: \_\_\_\_\_

6140 Ulmerton Road Clearwater, FL 33760  
 Phone: (727) 388-9895  
 Fax: (727) 362-1281

For the most current Specification Sheet, go to [www.buildpelican.com](http://www.buildpelican.com)

