

PAIRING BLUETOOTH® MIC

The pairing button on the base unit blinks red when it has power, but the mic is not on or connected.

Once the BT mic connects, the pairing button on the base will blink green. If the wired mic is connected and turned on, the pairing button on the base turns off.

When the BT mic is turned on, it will display the POWER ON screen with a blinking BT indicator and red blinking RX/TX indicator.

After it connects with the base, there is a "Base Unit Connected" voice prompt, the BT indicator on the display lights steady, and the red blinking RX/TX indicator turns off. Additionally, all channel information is displayed.

MIDLAND®

Follow us:



5900 Parretta Drive, Kansas City, MO 64120

Features and specifications subject to change without notice.

Visit midlandusa.com for more information on genuine Midland accessories for all Midland MicroMobile® products.

©2026 Midland Radio Corporation. All Rights Reserved.



QUICK START GUIDE MXT295



Quick Start Guide


RADIO SETUP

1. Attach the antenna cable to the radio's antenna jack.
2. Place the antenna at the highest point on the vehicle.
3. Connect the 12V power cable to the back of the radio's power cable connector.
4. Plug the power cable into the vehicle's 12V accessory port.

RADIO OPERATION

1. Rotate the Power/Volume Knob clockwise to turn the radio on. A "Base Unit Connected" voice prompt will be heard when the Bluetooth® microphone connects to the radio base.
2. Rotate the Power/Volume Knob further clockwise to increase the radio volume or counterclockwise to decrease the radio volume. The monitor function may be engaged to generate audible noise to aid in setting the volume. Press and hold the WX/MON button to toggle the monitor function on and off. (Figure A)
3. Use the UP and DOWN buttons on the radio microphone to select the radio channel. (Figure B)
4. Press and hold the PTT button and speak into the microphone to initiate communication. Release the PTT button to hear the reply.
5. Press and release the WX/MON button to enter or exit weather mode.
6. Rotate the Power/Volume Knob fully counterclockwise to turn the radio off.


Note: If using the wired microphone, insert the microphone's plug into the radio's microphone jack. Line up the connector key with the slot, push in, and twist the locking ring clockwise.

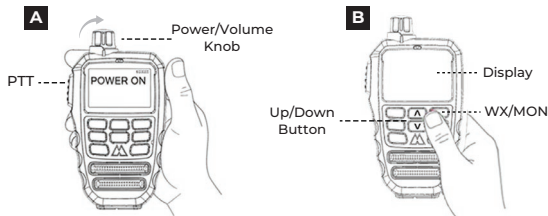

PAIRING BLUETOOTH® MIC

The radio and included Bluetooth microphone are paired from the factory. If a different microphone needs to be paired to the radio, use the following procedure.

1. Turn the microphone on. Since the microphone is not yet paired with the radio, it will pause at the POWER ON screen.
2. From the Power On screen, press and hold both the UP and DOWN buttons on the microphone until the RX/TX LED begins to blink red, green, and blue.
3. Press and hold the pairing button on the base unit for five seconds.
4. After the pairing button is released, the pairing button will blink red and green until the pairing process completes.

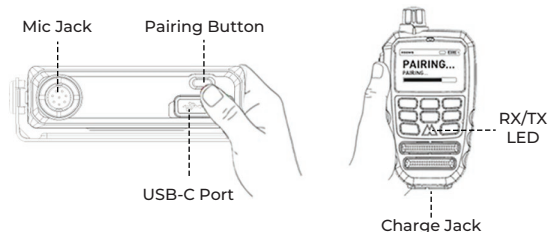

(Cont'd)