

# BAKERLUX SHOP.Pro™ LED

Easy-to-use convection oven designed for everyday use in pastry shops



## FEATURES

- LED control panel (IPX4)
- Interior LED lighting
- 1-3 Baking steps
- Timer 0 min. to ∞
- Program up to 99 recipes
- 0/20/40/60/80/100% humidity
- 2 fan speeds
- Proofer control\*
- Fan shut-off when door is opened

\*Proofer sold separately

## STEAM.Plus

Instantly produces humidity inside the baking chamber, for excellent results with every batch

## AIR.Plus


Bi-directional fan(s) guarantee perfect air and heat distribution within the baking chamber for uniform results at every point throughout every tray

## DRY.Plus

Humid air is expelled from the baking chamber to help the internal structure of the product form properly, creating a texture that remains perfect for hours

## EFFICIENT.Power

Best-in-class convection efficiency: 60°C to 260°C (140°F to 500°F) in 5 minutes. Low-e glass lining and high-performance insulation ensure reduced energy consumption

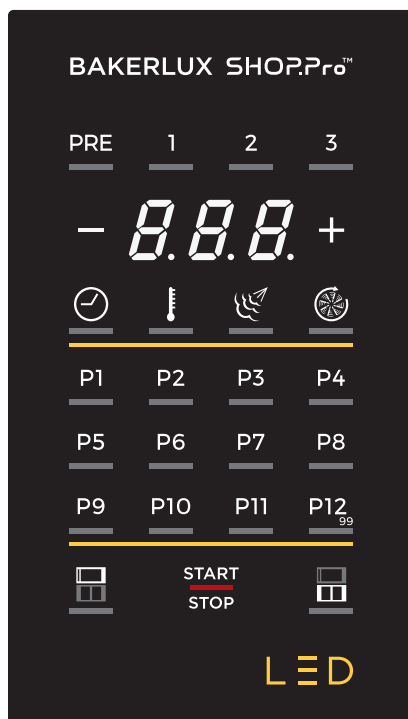


	XAFT-04FS-ELD V
DIMENSIONS	FULL SIZE (18" X 26")
SHELVES*	4
SHELF CLEARANCE	3"
POWER	208-240V, 7600W, 25.2A, 6-50P
FANS	2
DOOR SWING	TOP TO BOTTOM
TEMP. RANGE	0 - 260°C 32 - 500°F
CHAMBER DIM.	17.4" L X 27.4" W X 13.2" H
CHAMBER CAP.	3.6 CUFT
EXTERIOR DIM.	33.9" L X 31.5" W X 19.7" H
NET WEIGHT	126 LBS
SHIP DIM.	38.2" L X 44.1" W X 26" H
SHIP WEIGHT	161 LBS

\*Wire shelves included

# BAKERLUX SHOP.Pro™ LED

## CONSTRUCTION

- Stainless steel housing & cooking chamber
- Double-pane glass door
- Insulated baking cavity for thermal efficiency and user safety

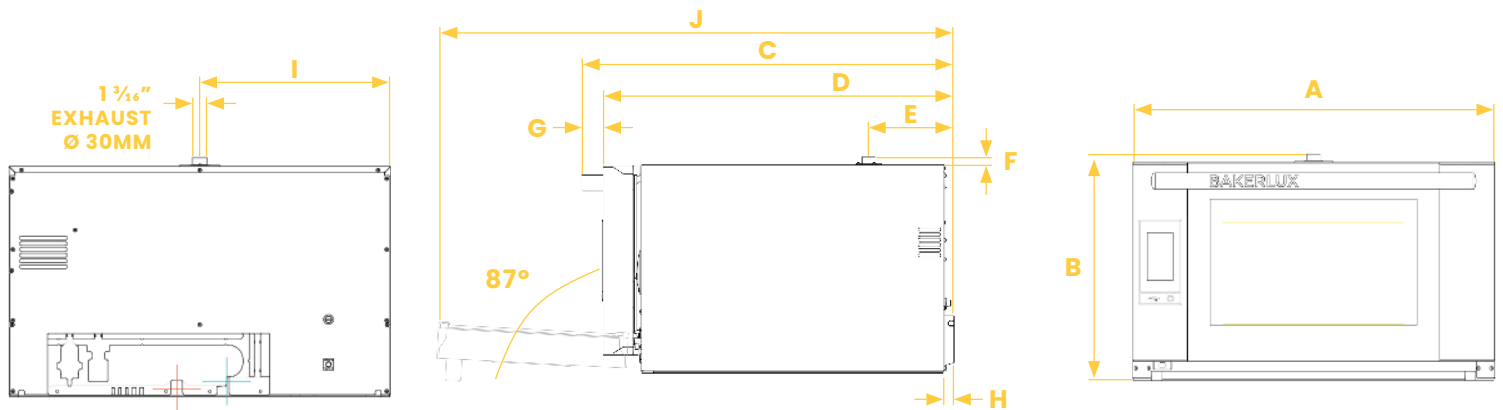

Oven must be min. 2" from the wall on both sides (left and right).

	A	B	C	D	E	F	G	H	I	J
XAFT-04FS-ELD.V	31.5"	19.7"	33.9"	31.9"	7.8"	.7"	2.0"	.9"	15.7"	47.0"

ONE YEAR WARRANTY ON PARTS AND LABOR (GLASS DOOR NOT INCLUDED)

