

GLASS DOOR MERCHANDISER, LARGE STORAGE CAPACITY FREEZERS

MODEL: MXGDM-30FBHC MXGDM-50FBHC MXGDM-73FBHC



MXGDM-30FBHC



MXGDM-50FBHC



MXGDM-73FBHC



Maxx Cold Glass Door Merchandiser Large Storage Capacity Freezers provide nominal storage capacity from 30, 50 and 70 cubic feet and are ideal for restaurants and hospitality applications. The bottom mount, glass door merchandisers are energy efficient with CFC free foam refrigerant and the triple pane glass doors that are effective at clearly displaying contents and regulating temperature to preserve freshness and prolong shelf life of food & beverage products. Installation is easy because freezers are equipped with integrated condensate evaporator therefore no drain line connection is needed. Simple-to-use, programmable solid-state digital controls deliver accurate temperature regulation and for added security the self-closing doors are provided with a lock and key set.

FEATURES AND CONSTRUCTION

- Constructed of a powder coated steel black exterior and white interior
- Interior LED lighting
- Low-e triple pane glass doors
- Bottom mounted compressor
- Four (4) adjustable heavy-duty PE-coated wire shelves per door, include pricing strips
- Four (4) rollers (2 with leveling feet) - 1 Door & 2 Door models
- Six (6) rollers (3 with leveling feet) - 3 Door models
- Electronic thermostat and digital LED temperature display provide accurate and easy reading
- Self-closing doors are provided with lock and key set for security
- Magnetic gasket can be replaced without tools
- CFC free refrigerant and foam
- Automatic defrost system, equipped with integrated condensate pan therefore no drain line connection is needed

ELECTRIC

115V / 60Hz / 1Ph (MXGDM-30FBHC & MXGDM-50FBHC)

115-230V / 60Hz / 1Ph (MXGDM-73FBHC)

6' (2m) power cord set included



120V NEMA 5-15P



115/120V NEMA L14-20

3RD PARTY APPROVALS



Intertek

Certified to ANSI NSF 7



Intertek

Certified to ANSI UL 471



Zero Ozone Depletion Potential

MAXX COLD WARRANTY (USA / CANADA)

Contact Maxx Cold for warranty statement at
 TechnicalServices@TheLegacyCompanies.com or 877.368.2797

NOMINAL STORAGE CAPACITY

MXGDM-30FBHC..... 30 Cu Ft (850 L)


MXGDM-50FBHC..... 50 Cu Ft (1416 L)

MXGDM-73FBHC..... 73 Cu Ft (2067 L)

TEMPERATURE

Holding temperature -4°F to 10°F (-20°C to -12°C)

- Oversized refrigeration system delivers optimum storage temperature and rapid temperature recovery

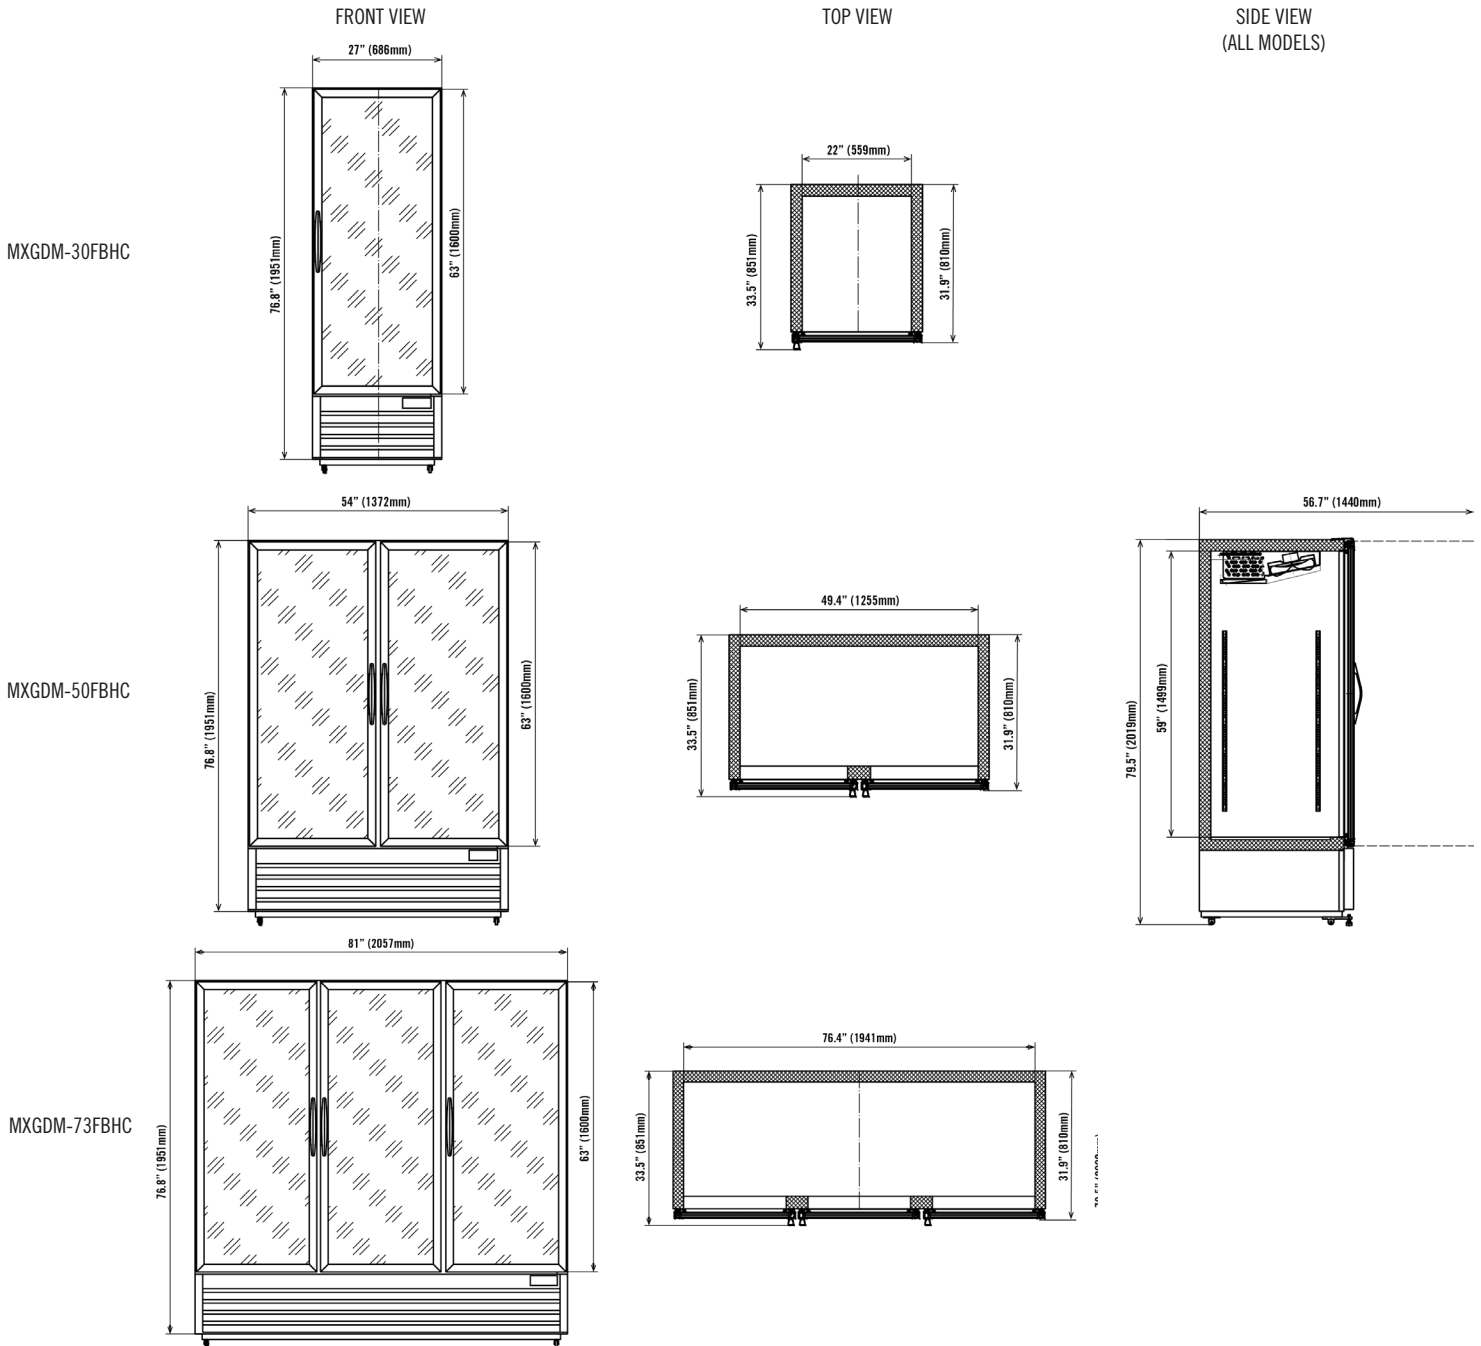

MODEL	EXTERNAL DIMENSIONS	INTERNAL DIMENSIONS	NOMINAL CAPACITY	HOLDING TEMPERATURE RANGE	AMP DRAW	SHIPPING WEIGHT	REFRIGERANT AND CHARGE SIZE	DOORS / SHELVES	ELECTRICAL
MXGDM-30FBHC	27" x 33.5" x 79.5" (686 x 851 x 2019 mm)	22" x 26.5" x 52.25" (559 x 673 x 1327 mm)	30 Cu Ft (850 L)	-4°F to 10°F (-20°C to -12°C)	8.0A	353 lbs (161 kg)	R-290A 3.88 oz (110 g)	1 Swing / 4 Shelves	115V / 60Hz / 1Ph
MXGDM-50FBHC	54" x 33.5" x 79.5" (1372 x 851 x 2019 mm)	49.4" x 26.5" x 52.25" (1255 x 673 x 1327 mm)	50 Cu Ft (1416 L)	-4°F to 10°F (-20°C to -12°C)	9.0A	567 lbs (257 kg)	R-290A 5.29 oz (150 g)	2 Swing / 8 Shelves	115V / 60Hz / 1Ph
MXGDM-73FBHC	81" x 33.5" x 79.5" (2057 x 851 x 2019 mm)	76.4" x 26.5" x 52.25" (1941 x 673 x 1327 mm)	73 Cu Ft (2067 L)	-4°F to 10°F (-20°C to -12°C)	9.0A	829 lbs (376 kg)	R-290A 5.29 oz (150 g)	3 Swing / 12 Shelves	115-230V / 60Hz / 1Ph

INSTALLATION

- Units are equipped with roller wheels and leveling feet.
- Door Handles are removable if unit is needed to fit through a 32" width door frame.