



Project Name: \_\_\_\_\_

Location: \_\_\_\_\_

Item #: \_\_\_\_\_ Qty: \_\_\_\_\_

Model: \_\_\_\_\_

## BOTTOM MOUNT REACH-IN FREEZERS

MODEL:  MCF-23FDHC  MCF-49FDHC  MCF-72FDHC



MCF-23FDHC



MCF-49FDHC



MCF-72FDHC


Maxx Cold reach-in freezers are constructed from stainless steel, engineered with digital controls and polyurethane insulation for optimal temperature control and easy maintenance. Available in 1, 2 and 3 door configurations, each model features recessed handles, door locks and PE coated wire shelving with storage space for full size sheet pans.

### FEATURES AND CONSTRUCTION

- Stainless steel exterior and interior
- Self-closing door(s) with easy to grip recessed handle(s)
- Field reversible door on single door model
- Automatic interior lighting
- Lock and key set for security
- Adjustable heavy-duty wire shelves (3 per section/door)
- Four (4) or six (6) 5" diameter swivel casters
- Electronic control panel with digital display
- Automatic defrost system
- Open door alert beeps if door has been open for five minutes
- Equipped with integrated condensate evaporator therefore no drain line connection is needed
- Polyurethane foam insulation provides outstanding thermal regulation and energy efficiency

### ELECTRIC

115V / 60Hz / 1Ph  
(230V / 50-60Hz / 1Ph is available as an option)  
6' (2m) NEMA 5-15P cord set included



NEMA 5-15P

### 3RD PARTY APPROVALS



Intertek

Certified to ANSI NSF 7



Intertek

Certified to ANSI UL 471



Meets Energy Star Guidelines

### TEMPERATURE

Holding temperature ..... -10°F to 10°F (-23°C to -12°C)


- Digital control system maintains optimum temperature
- Large evaporator and condenser for quick cooling and greater efficiency

### MAXX COLD WARRANTY (USA / CANADA)

Contact Maxx Cold for warranty statement at  
TechnicalServices@TheLegacyCompanies.com or 877.368.2797



# MAXX COLD BOTTOM MOUNT REACH-IN FREEZERS

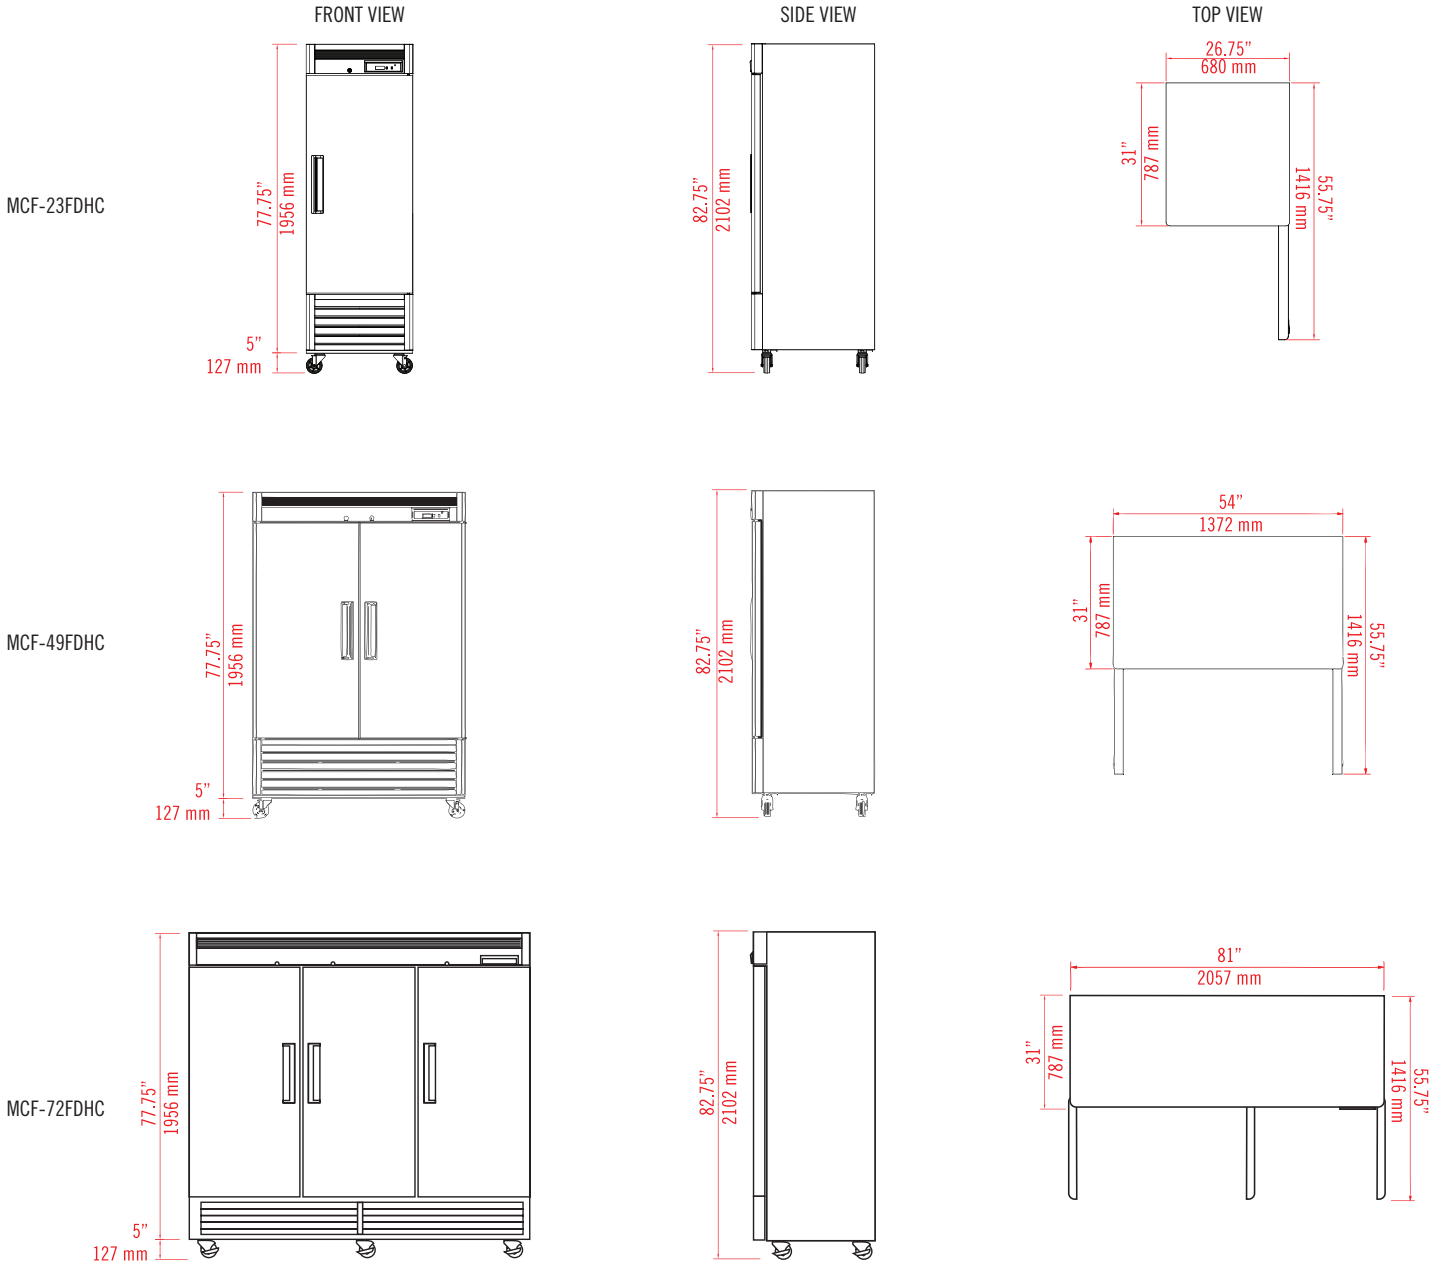

| MODEL      | EXTERNAL DIMENSIONS                            | INTERNAL DIMENSIONS                             | NET CAPACITY           | HOLDING TEMPERATURE RANGE         | AMP DRAW | HP  | UNIT WEIGHT         | REFRIGERANT AND CHARGE SIZE | DOORS / SHELVES | ELECTRICAL        |
|------------|--|---|------------------------|-----------------------------------|----------|-----|---------------------|-----------------------------|-----------------|-------------------|
| MCF-23FDHC | 26.75" x 31" x 82.75"<br>(680 x 787 x 2102 mm) | 22.8" x 24.1" x 53.7"<br>(578 x 613 x 1364 mm)  | 18.9 Cu Ft<br>(535 L)  | -10°F to 10°F<br>(-23°C to -12°C) | 5.6A     | 1/2 | 284 lbs<br>(129 kg) | R-290a<br>2.33 oz (66 g)    | 1 / 3           | 115V / 60Hz / 1Ph |
| MCF-49FDHC | 54" x 31" x 82.75"<br>(1372 x 787 x 2102 mm)   | 49.8" x 24.1" x 53.7"<br>(1264 x 613 x 1364 mm) | 42.8 Cu Ft<br>(1212 L) | -10°F to 10°F<br>(-23°C to -12°C) | 4.6A     | 1/2 | 403 lbs<br>(183 kg) | R-290a<br>4.44 oz (126 g)   | 2 / 6           | 115V / 60Hz / 1Ph |
| MCF-72FDHC | 81" x 31" x 82.75"<br>(2057 x 787 x 2102 mm)   | 77.3" x 24.1" x 53.7"<br>(1963 x 613 x 1364 mm) | 66.7 Cu Ft<br>(1889 L) | -10°F to 10°F<br>(-23°C to -12°C) | 9.9A     | 1   | 650 lbs<br>(295 kg) | R-290a<br>5.08 oz (144 g)   | 3 / 9           | 115V / 60Hz / 1Ph |

## INSTALLATION

- Shorter caster options are available to lower the overall height of the unit

09/20/21

Due to periodic changes in designs, methods, procedures, policies and regulations, the specifications contained in this document are subject to change without notice. While we exercise good faith efforts to provide information that is accurate, we are not responsible for errors or omissions in information provided or conclusions reached as a result of using the specifications. By using the information provided, the user assumes all risks in connection with such use.