



Project:

Item Number:

Quantity:

**SO218X HIGH CAPACITY FROZEN BEVERAGE DISPENSER**

SO218X High Capacity Frozen Beverage Dispenser



**ITEMS**

- SO218X-302B** Air-cooled, single-phase

**ACCESSORIES & OPTIONS**

- 2204650** SO218B Autofill Ready Kit - Includes hopper cover, tubing, mix probes, and solenoid. Requires autofill system.
- 4177349** Fill-O-Matic II Autofill System - Electric Pumps up to 60 gallons per hour.
- 4177370** Fill-O-Matic III Autofill System - Gas Pumps up to 45 gallons per hour.

**FEATURES**

- Bottle racks with plastic bottles and pumps are included.
- Simplified design for quick assembly after cleaning.
- Automatic defrost cycle prevents large ice crystal formation to maintain consistent product.
- Fast dispense for quick fill of pitchers, or controlled dispense for drinks by the glass.
- Efficient freezing cylinder and auger design delivers a consistent uniform product with small ice crystals and a quick recovery time.
- Single switch for simple operation and cleaning.



**DESCRIPTION**

High-capacity, gravity-fed floor model machines are equipped with fully-automatic controls to provide a uniform product. The SO218X operates with almost any type of frozen beverage mix.

The SO218X includes a bottle rack kit with seven flavor dispensers.

	<p>Every machine includes Stoelting's White Glove Service. One call does it all – customer service, technical service, parts or warranty information, installation, startup, sales, on-site service dispatch and much more. Available 24 hours a day, seven days a week year-round.</p>
--	---


*Continuous research leads to ongoing product improvements; therefore, these specifications are subject to change without notice and should not be used as installation specifications.*

Approvals	Date

Stoelting Foodservice Equipment

# SO218X HIGH CAPACITY FROZEN BEVERAGE DISPENSER

## DIMENSIONS

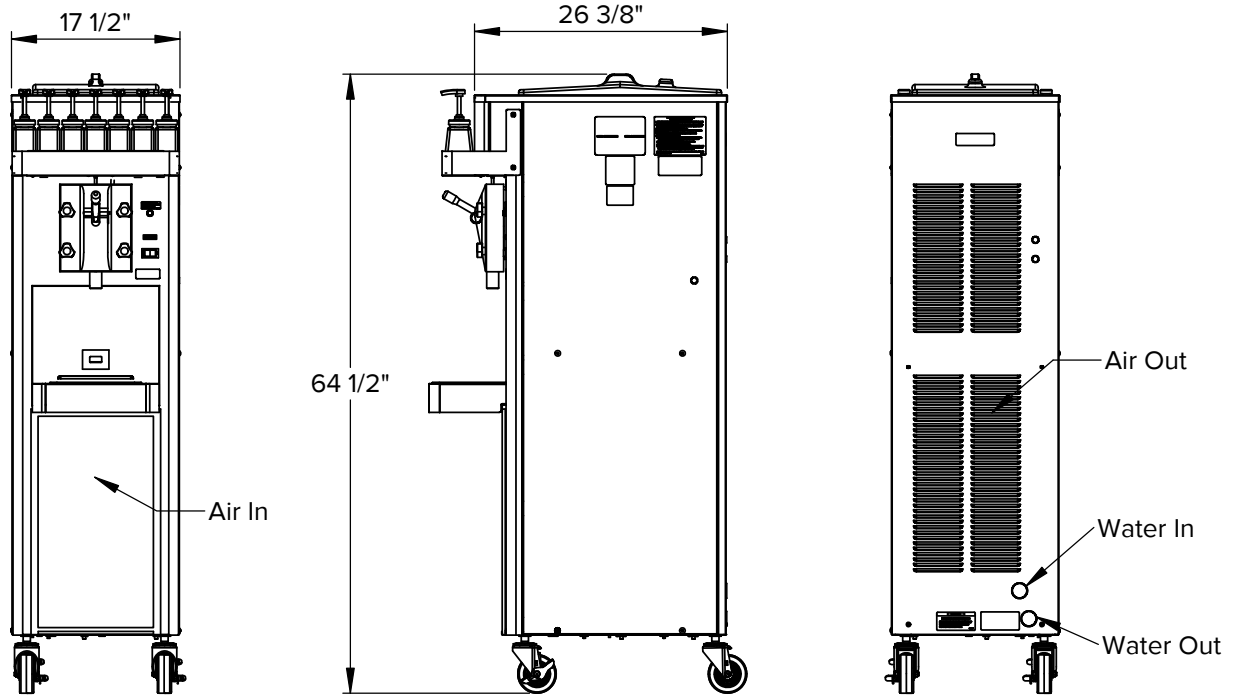

## GENERAL SPECIFICATIONS

Model	Freezing Cylinder			Hopper Capacity gallon (L)	Drive Motor (hp)	Weight lb (kg)	Crated Weight lb (kg)	
	Capacity gallon (L)	Compressor						
		Btu/hr	Refrigerant	Charge (oz)				
SO218X	2 (7.57)	14,000	R-448A	36 oz	7 (26.5)	1/2	315 (142.9)	420 (190.5)

- Indoor use only.
- Maximum ambient temperature: 100°F (37.8°C).
- Requires one dedicated electrical circuit per barrel.
- Air cooled units require: 3" (7.6 cm) air space at the front and back.
- Water cooled units require: 3/8" N.P.T. water and drain fittings. Maximum water pressure of 130 psi. Minimum water flow rate of 3 GPM per barrel. Ideal EWT of 50°-70°F.
- Details on CAD Revit Symbols Libraries are available on [www.stoelting.kclcad.com](http://www.stoelting.kclcad.com) website.

## ITEM NUMBER SPECIFICATIONS

Model Number	Cooling	Phase	Volts	Hz	Running Amps	Cord with Plug (Included)
SO218X-302B	Air	1	220-240	50	13	NA



**Service Information**  
 800-319-9549 (U.S. Toll Free)  
 920-894-2293 (Outside the U.S.)  
[www.stoeltingfoodservice.com](http://www.stoeltingfoodservice.com)  
[www.vollrath.com](http://www.vollrath.com)