

SOLID TOP CHEST FREEZERS

MODEL: MXSH3.4SHC MXSH5.2SHC MXSH7.0SHC



MXSH3.4SHC



MXSH5.2SHC



MXSH7.0SHC


Maxx Cold Select Series Chest Freezers with a solid hinged lid top is ideal for safely storing frozen food products such as meat, packaged foods, ice cream, vegetables, desserts and bagged ice. Interior storage basket(s) allow you to organize your products and quickly retrieve what you need. The oversized refrigeration system keeps your products safely stored even in extreme low or high ambient temperatures.

FEATURES AND CONSTRUCTION

- White powder coated steel exterior and aluminum interior
- Locking hinged top lid with integrated handle
- Environmentally friendly, CFC-free urethane foam insulation helps store contents safely for up to 2 days in the event of a power outage
- Equipped with one (1) heavy-duty coated wire storage basket
- Equipped four (4) with 1.3" rollers for mobility
- Adjustable wire shelves (one per section/door)
- Integrated condensate evaporator pan eliminates the need for a floor drain connection
- Manual defrost

ELECTRIC

115V / 60Hz / 1Ph
 (230V / 50-60Hz / 1Ph is available as an option)
 6' (2m) NEMA 5-15P cord set included



NEMA 5-15P

TEMPERATURE

Holding temperature -11.2°F to -1°F (-24°C to -18°C)

- Efficient, cold wall system delivers even temperature regulation throughout the storage compartment
- Easily adjustable control system
- Oversized refrigeration and efficient foam insulation provides rapid recovery and excellent temperature regulation

3RD PARTY APPROVALS



Intertek

Certified to ANSI NSF 7



Intertek

Certified to ANSI UL 471




DOE 2017 Compliant

MAXX COLD WARRANTY (USA / CANADA)

Contact Maxx Cold for warranty statement at
 TechnicalServices@TheLegacyCompanies.com or 877.368.2797

MAXX COLD SOLID TOP CHEST FREEZERS

SELECT SERIES

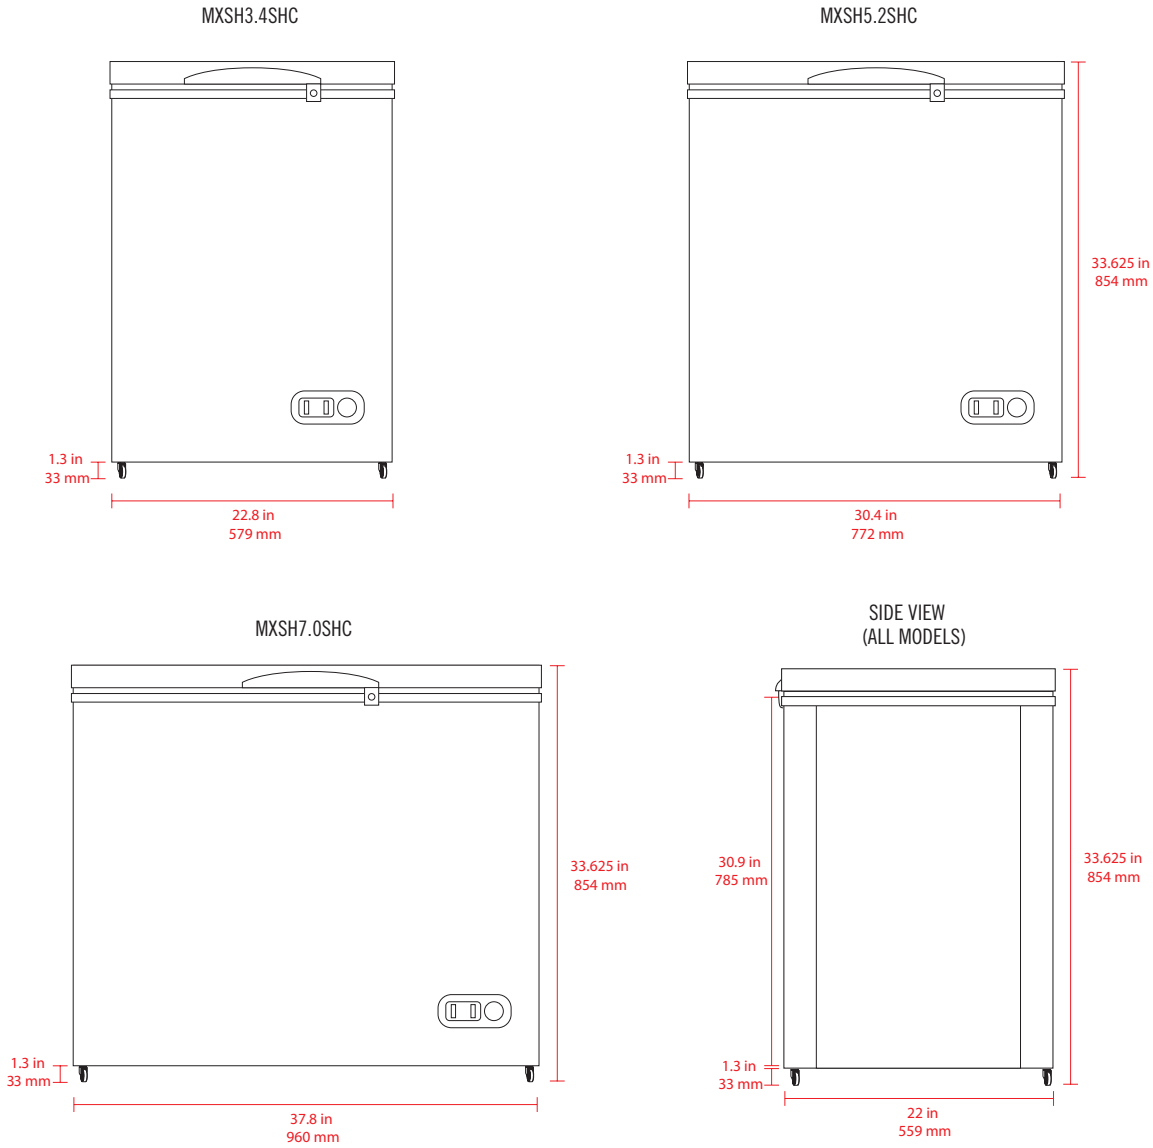

| MODEL | EXTERNAL DIMENSIONS | INTERNAL DIMENSIONS (W x D x H / Compressor Height) | CAPACITY | HOLDING TEMPERATURE RANGE | AMP DRAW | SHIPPING WEIGHT | REFRIGERANT AND CHARGE SIZE | LIDS/BASKETS | ELECTRICAL |
|------------|--|--|----------------------|-------------------------------------|----------|---------------------|-----------------------------|--------------|-------------------|
| MXSH3.4SHC | 22.8 x 22 x 33.625 579 x 559 x 854 mm | 17.24 x 14.72 x 26.44 / 8.70 438 x 374 x 672 / 221 mm | 3.4 Cu Ft (96 L) | -11.2°F to -1°F (-24°C to -18°C) | 1.0A | 75 lbs (34 kg) | R-600a 1.76 oz (50 g) | 1 / 1 | 115V / 60Hz / 1Ph |
| MXSH5.2SHC | 30.4 x 22 x 33.625 772 x 559 x 854 mm | 24.64 x 14.72 x 26.44 / 8.70 626 x 374 x 672 / 221 mm | 5.2 Cu Ft (147 L) | -11.2°F to -1°F (-24°C to -18°C) | 1.0A | 92.6 lbs (42 kg) | R-600a 1.98 oz (56 g) | 1 / 1 | 115V / 60Hz / 1Ph |
| MXSH7.0SHC | 37.8 x 22 x 33.625 960 x 559 x 854 mm | 32.01 x 14.72 x 26.44 / 8.70 813 x 374 x 672 / 221 mm | 7.0 Cu Ft (198 L) | -11.2°F to -1°F (-24°C to -18°C) | 5.6A | 99.2 lbs (45 kg) | R-600a 1.90 oz (54 g) | 1 / 1 | 115V / 60Hz / 1Ph |

INSTALLATION

- Unit may be installed in a non-air conditioned space such as a garage or basement without effecting performance