

# UNDERCOUNTER REFRIGERATORS

MODEL:  MXSR29UHC  MXSR48UHC  MXSR60UHC



MXSR29UHC



MXSR48UHC



MXSR60UHC


Maxx Cold Select Series Undercounter Refrigerators are designed for performance – holding your products at their ideal storage conditions. These undercounter refrigerators make the most of available space and provide excellent service. The stainless steel exterior provides durability and ensures years of reliable service if properly maintained. The unit's foam insulation and forced air cooling system deliver an outstanding food storage environment.

## FEATURES AND CONSTRUCTION

- Exterior Material: Durable, easy to clean stainless steel
- Interior Material: Easy to clean painted aluminum
- Environmentally friendly, CFC-free urethane foam insulated walls and doors
- Heavy duty epoxy coated shelves for easy access and minimal maintenance without disrupting air flow
- Rear-accessed utility compartment provides space efficiency as well as easier servicing while conserving energy consumption
- Easily replaceable dart-style magnetic compression gaskets
- Easy to grip, stainless steel, self-closing doors with integrated door handles
- Four (4) 5.5" casters (2 locking) for mobility
- Adjustable wire shelves (one per section/door)
- Integrated condensate evaporator pan eliminates the need for a floor drain connection

## ELECTRIC

115V / 60Hz / 1Ph  
 (230V / 50-60Hz / 1Ph is available as an option)  
 6' (2m) NEMA 5-15P cord set included



NEMA 5-15P

## 3RD PARTY APPROVALS



Intertek

Certified to ANSI NSF 7



Intertek

Certified to ANSI UL 471



DOE 2017 Compliant


## MAXX COLD WARRANTY (USA / CANADA)

Contact Maxx Cold for warranty statement at  
 TechnicalServices@TheLegacyCompanies.com or 877.368.2797

## TEMPERATURE

Holding temperature ..... 33°F to 41°F (1°C to 5°C)

- Efficient, forced-air refrigeration system delivers even temperature regulation throughout the storage compartment
- Easily adjustable solid state control scheme with digital temperature display
- Oversized refrigeration and efficient foam insulation provides rapid recovery and excellent temperature regulation

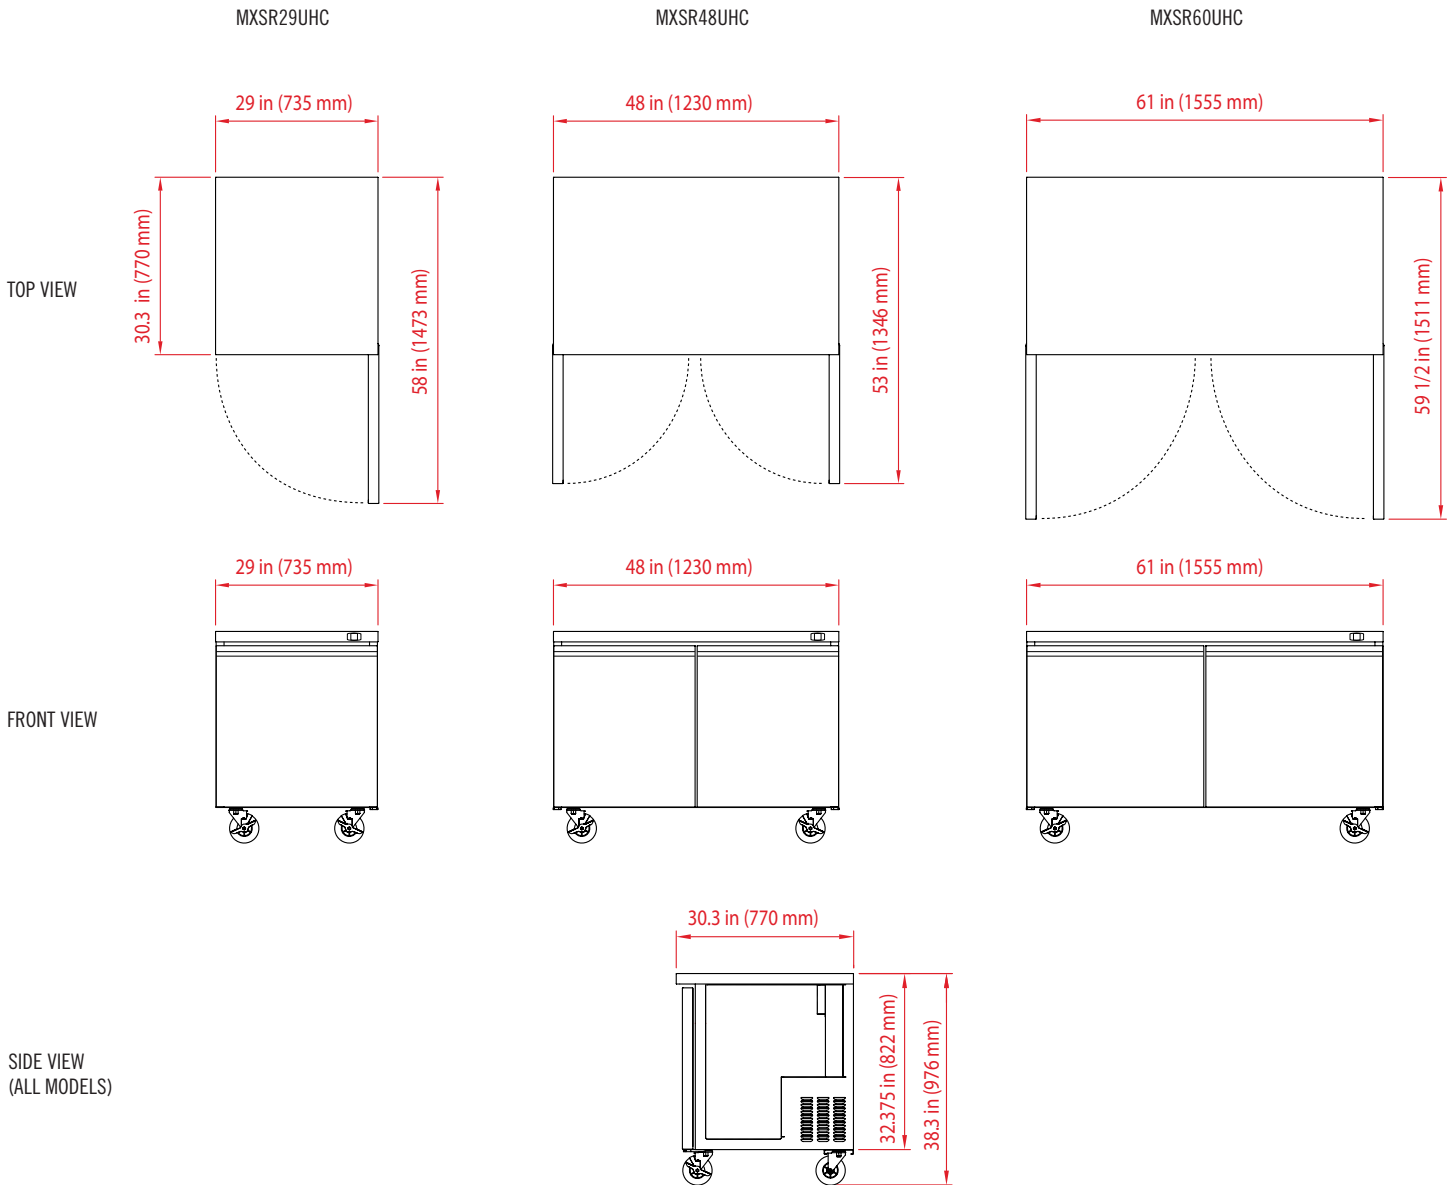

MODEL	EXTERNAL DIMENSIONS	INTERNAL DIMENSIONS	NET CAPACITY	HOLDING TEMPERATURE RANGE	AMP DRAW	UNIT WEIGHT	REFRIGERANT	DOORS / SHELVES	ELECTRICAL
MXSR29UHC	29" x 30.3" x 38.3" (735 x 770 x 976 mm)	24" x 23.4" x 26.6" (610 x 636 x 676 mm)	6.7 Cu Ft (184 L)	33°F to 41°F (1°C to 5°C)	3.6A	143 lbs (65 kg)	R-290a	1 / 1	115V / 60Hz / 1Ph
MXSR48UHC	48" x 30.3" x 38.3" (1230 x 770 x 976 mm)	43" x 23.4" x 26.6" (1105 x 636 x 676 mm)	11.1 Cu Ft (340 L)	33°F to 41°F (1°C to 5°C)	4.3A	242 lbs (110 kg)	R-290a	2 / 2	115V / 60Hz / 1Ph
MXSR60UHC	61" x 30.3" x 38.3" (1555 x 770 x 976 mm)	56" x 23.4" x 26.6" (1430 x 636 x 676 mm)	14.1 Cu Ft (439 L)	33°F to 41°F (1°C to 5°C)	5.6A	265 lbs (120 kg)	R-290a	2 / 2	115V / 60Hz / 1Ph

## INSTALLATION

- Shorter caster options are available to lower the overall height of the unit