

Project Name:	
Location:	
Item #:	Qty:
Model:	

15 INCH COUNTERTOP OR BUILT-IN ICE MAKER

MODEL:

MIMC15C



MIMC15C

ELECTRIC -

115V / 60Hz / 1Ph International voltage available 6' (2m) NEMA 5-15P cord set included



3RD PARTY APPROVALS -



MAXX ICE WARRANTY (USA / CANADA) -

Contact Maxx Ice for warranty statement at TechnicalServices@TheLegacyCompanies.com or 877.368.2797

The Legacy Companies • 3355 Enterprise Avenue, Suite 160 • Fort Lauderdale, FL 33331 Sales: 954.202.7419 • Sales@TheLegacyCompanies.com • www.maxx-ice.com

The Maxx Ice MIMC15C produces up to 15 pounds of crescent ice cubes per day, up to 4 times as much as your standard household freezer ice maker. Its compact front-breathing design make it suitable for built-in applications while the fact that it does not need a drain line gives you even more flexibility to install in a wide variety of locations with ease. The stylish stainless steel reversible door and finished black exterior will look great anywhere.

FEATURES AND CONSTRUCTION ——

- Produces up to 15 lbs of ice per day, up to 4x as much as a standard household freezer ice maker
- Ice storage bin holds up to 12 lbs and is removable for easy access to the ice
- The interior is a freezer so the ice stays frozen no drain required
- Compact design with a height of 24.8" allows installation under a counter and is also ADA Compliant
- Stainless steel door is stylish and field-reversible for left or right handed operation
- Door-close assist feature forms a strong seal when door is closed and also prevents accidental opening
- Simple and worry-free On/Off switch with automatic shutoff when the ice bin is full
- Adjustable feet for leveling the unit and installing at the perfect height
- The unit must be periodically manually defrosted
- Includes ice scoop and water inlet hose

DAILY ICE PRODUCTION -

ICE BIN STORAGE CAPACITY —


MIMC15C 12 lbs (5.4 kg)


OPERATING REQUIREMENTS -

Ambient Air Temperature Range..... 50° to 100°F (10° to 38°C)
Water Temperature Range....... 40° to 90°F (4° to 32°C)
Water Usage per 100 lbs of ice...... 12.6 Gallons (47.7L)
Water Supply Line Connection....... 1/4" 0.D. Compression
Water Pressure Range:


Min PSI............. 20 Max PSI 80*
Min Bar 1.0 Max Bar 5.5


*Above 75 PSI requires a regulator Energy Consumption per 100 lbs of ice:

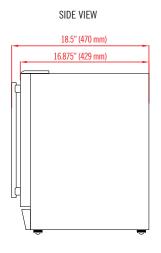



FRONT VIEW

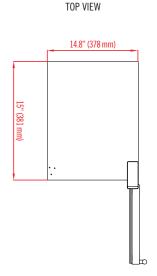

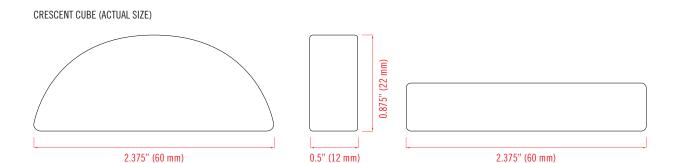

MODEL	EXTERNAL Dimensions	DAILY ICE PRODUCTION (70°F Air / 50°F Water)	ICE BIN STORAGE Capacity	NET WEIGHT / Shipping Weight	AMP DRAW (Making / Harvesting)	REFRIGERANT And Charge Size	ELECTRICAL
MIMC15C	14.8" x 18.5" x 24.8" (378 x 470 x 632 mm)	15 lbs (11.3 kg)	12 lbs (5.4 kg)	50 lbs (23 kg) 55 lbs (25 kg)	1.2A / 2.7A	R-600a 3.88oz (110g)	115V / 60Hz / 1Ph

INSTALLATION -

- All ventilation from front, limited vent in the back of unit no additional clearance required around sides of unit
- Requires incoming water line no drain required