



Project Name: _____

Location: _____

Item #: _____ Qty: _____

Model: _____

UNDERCOUNTER HIGH-TEMP DISHWASHER

MODEL: UC-18-1 UC-18-3



UC-18-1 / UC-18-3

RACK SIZES:

Dish Rack	20 in x 20 in	508mm x 508mm
Dish Max Height	12.25 in	311mm
Plates Diameter	12.75 in	324mm

WATER CONSUMPTION

Per Rack	0.60 – 0.74 (gal)	2.27 – 2.8 (L)
----------	-------------------	----------------

OPERATING CYCLES:

Cycle 1	120 sec
Cycle 2	180 sec

OPERATING CAPACITY

Racks per hour	30 / 20
Wash Tank Capacity	7.1 (gal) 26.88 (L)
Booster Capacity	1.5 (gal) 5.68 (L)

CYCLE TEMPERATURES

Wash	160°F	71.1°C
Rinse	185°F	85°C

WATER REQUIREMENTS

Inlet Temperature	140°F	60°C
Inlet Water Pressure	25-60psi	1.8 – 4.2kg/cm ²
Flow Pressure	15-25psi	1.0 – 1.8kg/cm ²

All specifications are dependent on water pressure and temperature

3RD PARTY APPROVALS



BLAKESLEE WARRANTY (USA / CANADA)

Blakeslee dishwashers are warrantied for one year from date of installation against defective materials and workmanship.

Contact Blakeslee USA for details at service@blakesleeinc.com or 630.532.5021



Blakeslee's undercounter dishwasher is ideal for bars, pubs, restaurants and hotels. A beautifully redesigned machine at a reasonable price.

FEATURES AND CONSTRUCTION

- 30 rack per hour / 2 minute cycle
- 20 rack per hour / 3 minute cycle
- Built-in 6.5 Kw booster
- 2.7 Kw wash tank heater
- 180-degree sanitizing rinse every cycle
- Built-in detergent and rinse aid dispensers with hook-up provided
- Removable wash and rinse arms (upper and lower)
- Triple filtering system to capture soil and debris
- Built-in 6530 watt booster heater for 180 degree final rinse water Perfecta-Rinse™. Extends the wash cycle time to ensure 180 degree final rinse
- Top mounted controls
- Easy to read and simple to operate
- Double skin stainless steel door with security micro-switch
- Double skin stainless steel interior with deep formed rack supports
- Internal cavity and exterior panels – 304 stainless steel
- Noise – 59.3 dB(A)
- Built in drain pump provides versatility for installation locations
- 43W hMAX 31 1/2" (10, 56 gal(US)/min**)
 - ** Maximum Flow Rate
- Pump power – 0.75 HP/ 560W (89.8 gal (US) / min***)
 - *** Maximum Flow Rate



UNDERCOUNTER HIGH-TEMP DISHWASHER

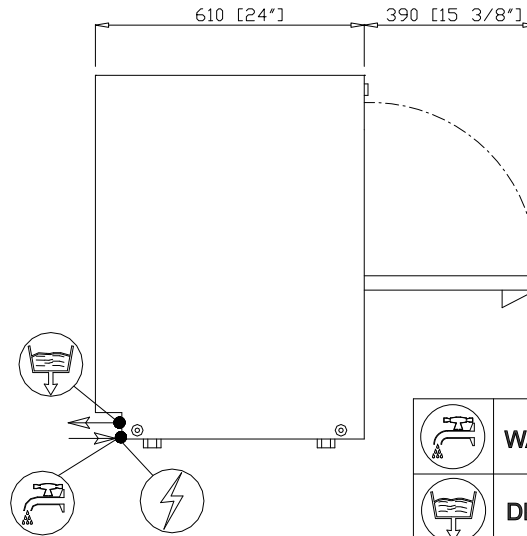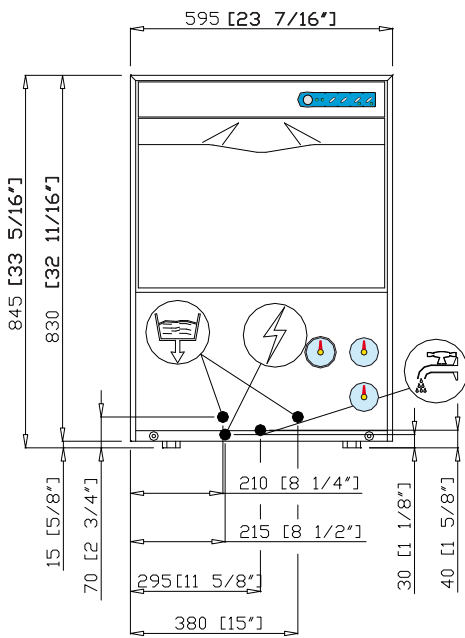

	WATER CONNECTION 3/4" G
	DRAINING 15/16 inch
	ELECTRICAL SUPPLY

MODEL	DIMENSIONS	RACK SIZE	RACKS PER HOUR	ELECTRICAL	KW POWER	WEIGHT
UC-18-1	34" x 30" x 44" (836 x 762 x 1118 mm)	20" X 20" (500 X 500mm)	30 / 20	220-240V/60Hz/1Ph	29.5A - 32.2A / 7,090 Watt	190 lbs (86.18 kg)
UC-18-3	34" x 30" x 44" (836 x 762 x 1118 mm)	20" X 20" (500 X 500mm)	30 / 20	220-240V/60Hz/3Ph	17.1A - 18.6A / 7,090 Watt	190 lbs (86.18 kg)

All specifications are dependent on water pressure and temperature

*Other voltages available - contact factory