



Project Name: _____

Location: _____

Item #: _____ Qty: _____

Model: _____

RACK CONVEYOR TYPE DISHWASHER

MODEL: RC-86 RC-86DR RC-86HR



RACK SIZES:

Dish/Glass Rack	20 in x 20 in	500mm x 500mm
Cutlery Basket	19.25 in x 7 in	500mm x 500mm
Trays Basket	20 in x 2 0in	500mm x 500mm

WATER CONSUMPTION

Per Hour	137.4 (gal)	520.1 (L)
----------	-------------	-----------

OPERATING CYCLE AND CAPACITY:

Racks per hour (Min/Max)	240 / 340
--------------------------	-----------

TANK CAPACITY

Pre-Wash	22.45 (gal)	85 (L)
1st Chemical Wash	22.45 (gal)	85 (L)

CYCLE TEMPERATURES

Pre-Wash	115°F	46.1°C
1st Chemical Wash	165°F	72°C
Pre-Rinse	165°F	72°C
Rinse	180°F	82°C

WATER REQUIREMENTS

Inlet Temperature	140°F	60°C
Inlet Temperature	110°F	43°C
		(requires 28kW booster)
Inlet Water Pressure	30-87psi	2.11- 6.12kg/cm ²
Flow Pressure	15-25psi	1.0-1.8kg/cm ²

All specifications are dependent on water pressure and temperature

3RD PARTY APPROVALS



BLAKESLEE WARRANTY (USA / CANADA)


Blakeslee dishwashers are warrantied for one year from date of installation against defective materials and workmanship.

Contact Blakeslee USA for details at service@blakesleeinc.com or 630.532.5021

Blakeslee rack machines are state of the art machines designed to deliver superior cleaning performance and productivity, using the least amount of energy, water and chemicals. This machine is also available with optional blower dryer or an integrated heat recovery system. The top line model with the integrated heat recovery system offers energy savings of 20% over non equipped models depending on operational and site factors.

FEATURES AND CONSTRUCTION

- Double rinse system granting high efficiency with low consumption
- Self-cleaning vertical wash pump, protected from electrical overloads
- Two speed traction system with built-in clutch preventing derailment.
- Removable Stainless steel washing and rinsing arms for easier cleaning operation
- Stainless steel surface filters on every tank, easily removable without detaching washing arms, to keep the water clean and free from soil and debris
- Radial wash tank sloped to help emptying
- Economizers to allow operation only when the rack is detected on that specific area, avoiding any waste of water and energy
- Pressure reducer stabilizes water pressure for an optimal final rinse
- Available with blower dryer and blower dryer + heat recovery options
- Built in 18kW final rinse booster heater
- Optional 28kW final rinse booster available for a 70°F rise
- Low voltage, electronic soft touch panel with IPX5 security level
- User-friendly and easy-to-clean
- Auto timer switches off the rack conveyor motor, as well as other machine options. Limits operating expense
- Stainless steel AISI 304 structure
- Stainless steel AISI 316 tank and booster, fully insulated boiler to reduce thermal losses
- Insulated double skin door, counterbalanced, equipped with anti-drop safety system
- Break Tank safety system to fill tank and prevent backflow contamination
- Vacuum Breaker to fill the booster and prevent the backflow of water, and avoid any contamination of the water supply in case of external depression

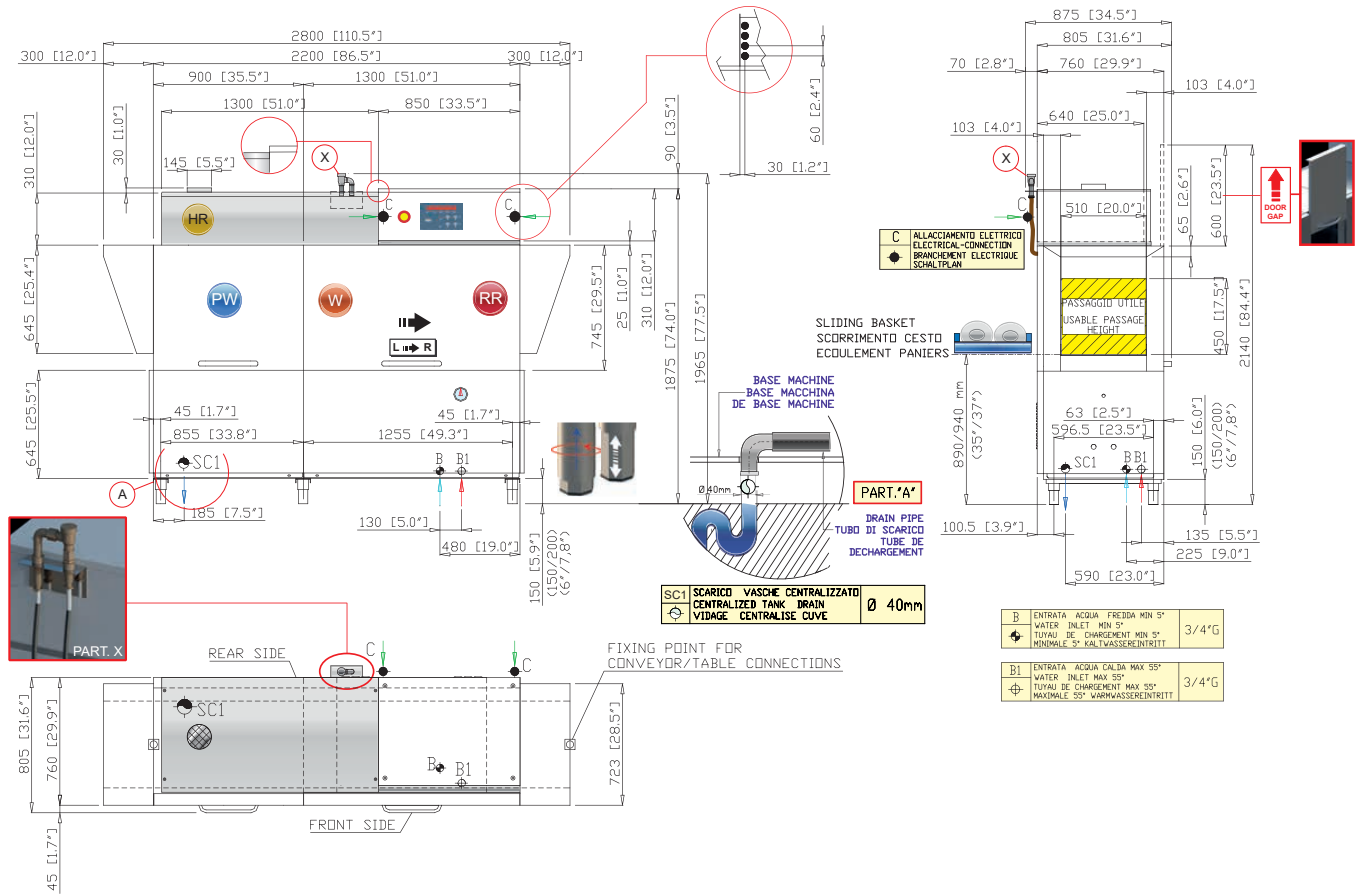

RATED POWER

(incoming water temperature at 140°F)

Pre-Wash	Pump Rated Power	1.9 kW
1st Chemical Wash	Pump Rated Power	1.9 kW
.....	Tank Heating Element	14 kW
Pre-Rinse	Pump Rated Power	0.2 kW
.....	Pre-Rinse Heating Element	9 kW
Final Rinse	Total Booster Power	18 kW

(incoming water temperature at 110°F – requires optional 28kW booster)

Final Rinse..... Total Booster Power 28 kW

GENERAL SPECIFICATIONS	RC-86-3	RC-86-3 DR24	RC-86-3 HR	RC-86-3 HR + DR69
140°F (HIGH TEMP - 40° RISE CONFIGURATION)				
Total Installed Power (kW)	45.13	54.50	Hot Water Input is Not an Option; Cold Water Input Only	Hot Water Input is Not an Option; Cold Water Input Only
Amperage at 208v 3 Phase (AMP)	130.60	156.70		
Amperage at 220-240v 3 Phase (AMP)	124.20	149.20		
Amperage at 480v 3 Phase (AMP)	59.20	70.90		
110°F (70° RISE CONFIGURATION)				
Total Installed Power (kW)	55.13	64.50	69.18	78.55
Amperage at 208v 3 Phase (AMP)	158.40	184.50	197.50	223.60
Amperage at 220-240v 3 Phase (AMP)	150.40	175.40	187.30	212.30
Amperage at 480v 3 Phase (AMP)	71.20	82.90	88.30	100.00