



Project Name: _____


Location: _____

Item #: _____ Qty: _____


Model: _____

PICA EXTRA DEEP PROOFING CABINETS (NON-INSULATED & INSULATED)

MODEL: PICA70-32-AED PICA70-32INS-AED

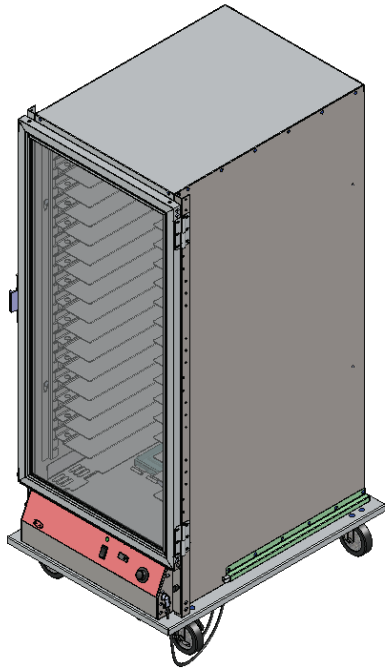

PICA70-32-AED
Non-Insulated

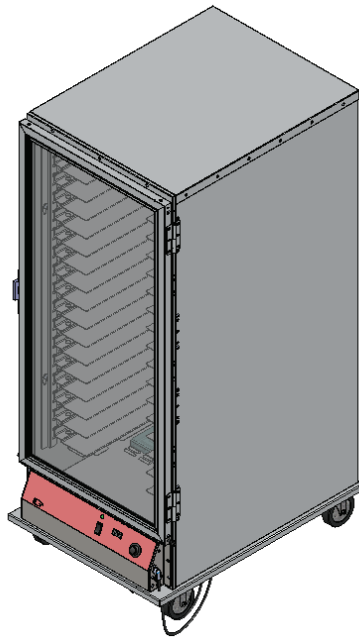

PICA70-32INS-AED
Insulated

ELECTRIC

120V / 60Hz / 1Ph
(208-230V / 50-60Hz / 1Ph is available as an option)
8' NEMA 5-15P cord set included



NEMA 5-15P

3RD PARTY APPROVALS



BevLes Extra Deep Proofing Cabinets are constructed of aluminum and feature universal extruded pan supports and extended space to accommodate a wide variety of pans and screens, including 23" x 32" screens. Each unit features clear Lexan doors with heavy-duty hinges, positive closing latches and full perimeter gaskets. User-friendly, bottom mounted controls feature independent heat and humidity adjustment.

FEATURES AND CONSTRUCTION


- Body: .063 Formed aluminum
- Door: clear Lexan with an extruded aluminum frame
- Door latch and hinges: positive action door latch with heavy-duty stainless steel hinges
- Door gasket: closed cell foam
- Base: .125 Formed aluminum
- Rear (air duct) panel: .063 Formed aluminum

FEATURES

- Extra deep to accomdate 32" x 23" pans
- Fully insulated top, sides and back on PICA70-32INS-AED
- Extruded pan supports accept a variety of pans and screens
- Removable heating module
- Easy to operate controls feature digital thermostat, variable humidity control and LED display
- Maintains uniform temperature/humidity throughout cabinet
- 5 quart (4.7 liter) cast water reservoir
- "Cast-in" humidity system prevents element burnout from water spills and potential injury from accidental contact with exposed heating element
- Temperature adjustable from 60°F (15.6°C) to 120°F (48.9°C)
- Self-draining feature collects excess moisture into a standard bun pan (not included) below the base of the cabinet
- Completely removable interior components make cleaning quick and easy
- Heavy-duty plate casters with 5" neoprene wheels, front two with brakes



PICA EXTRA DEEP PROOFING CABINETS (NON-INSULATED & INSULATED)

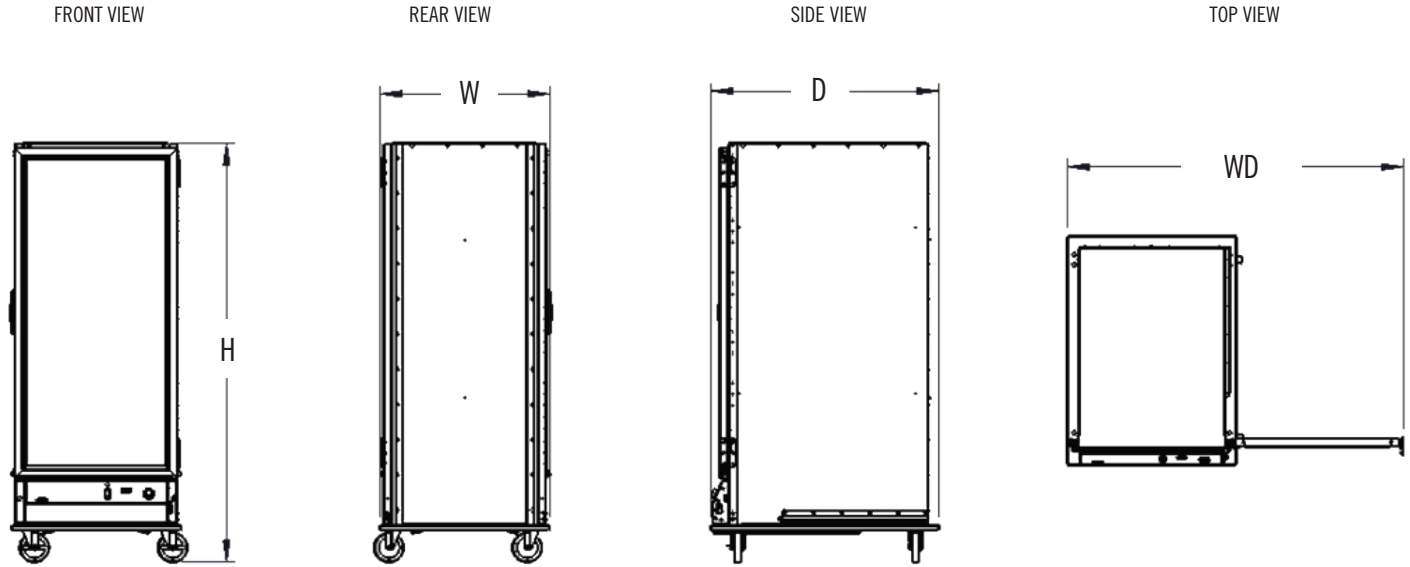

MODEL	CAPACITY 18x26 / 12x20 / *SPACING	WIDTH (W)	DEPTH (D)	HEIGHT (H)	WIDTH WITH DOOR OPEN (WD)	INTERNAL HEIGHT	VOLTAGE	WATTS	AMPS	PLUG	UNIT WEIGHT / SHIPPING WEIGHT	CLEARANCES
PICA70-32-AED	16 / 32 / 3"	29" 740 mm	39" 991 mm	71.5" 1820 mm	57.5" 1460 mm	57" 1450 mm	120V / 60Hz / 1 Ph	1400	13	NEMA 5-15P	230 lbs / 105 kg 290 lbs / 132 kg	Zero Clearance Cabinet
PICA70-32INS-AED	16 / 32 / 3"	29" 740 mm	39" 991 mm	71.5" 1820 mm	57.5" 1460 mm	55" 1400 mm	120V / 60Hz / 1Ph	1400	13	NEMA 5-15P	270 lbs / 123 kg 330 lbs / 150 kg	Zero Clearance Cabinet

* Adjustable on 1.50" centers. Also accommodates 19" x 19" and 23" x 23" screens, or 18" x 26" pans

AVAILABLE OPTIONS & ACCESSORIES

- Reverse door hinging
- Solid door
- Corner bumpers of gray non-marking vinyl (set of 4)
- Perimeter bumper of gray non-marking vinyl
- Additional extruded universal pan supports
- 6" stainless steel legs with adjustable feet for stationary floor installation *
- 6" casters with soft rubber wheels
- 18" x 26" chrome electroplated wire racks