



Project Name: _____

Location: _____

Item #: _____ Qty: _____

Model: _____

CLIMATE SELECT HEATED HOLDING CABINETS

MODEL: HCSS44W6 HCSS60W9 HCSS74W12



HCSS44W6



HCSS60W9



HCSS74W12

Climate Select Heated Holding Cabinets offer reliable temperature control in a fully insulated cabinet that holds prepared foods at consistent temperature by providing independent, operator-controlled convection heat and moisture settings. Heat and moisture gently surround food, reducing waste, increasing holding time and keeping food safe, hot and appetizing.

CONSTRUCTION

- Exterior: 20 ga 304 #3 finish stainless steel
- Interior: 22 ga 304 2B finish stainless steel
- Exterior door panel: 20 ga 304 #3 stainless steel
- Interior door panel: 22 ga 400 BA finish stainless steel
- Internal framework: 18 ga 304 stainless steel
- .125 formed aluminum base with welded corners
- 22 ga 304 2B stainless steel side air ducts
- Fully insulated doors, back, sides, top and base
- Heavy-duty field reversible doors with self-closing lift off hinges and magnetic latches

FEATURES

- Adjustable welded wire 304 stainless steel pan supports on 1.5" centers
- Holding temperature range: 70°F (21°C) to 215°F (102°C)
- Recessed stainless steel side mounted pull grips provide easy mobility (front and rear)
- Cool-to-touch handle(s) and turn knob lock
- Magnetic NSF approved Santoprene door gaskets
- Removable interior components for quick and easy cleaning
- Drip trough drains into pan located under base
- Top mounted dual coil heating unit elements rated at 600 watts @120v, or 1000 watts @ 208-230v
- 4 gal. water pan with separate 750 watt heating element
- Easy to operate controls feature precision variable thermostat, variable humidity control and dial thermometer
- Low water level indicator light
- Heavy-duty plate casters, with 5" neoprene wheels; all swivel, with wheel brakes on front two casters

ELECTRIC

120V / 60Hz / 1Ph
(208-230V / 50-60Hz / 1Ph is available as an option)
8' NEMA 5-20P cord set included




NEMA 5-20P

3RD PARTY APPROVALS





CLIMATE SELECT HEATED HOLDING CABINETS

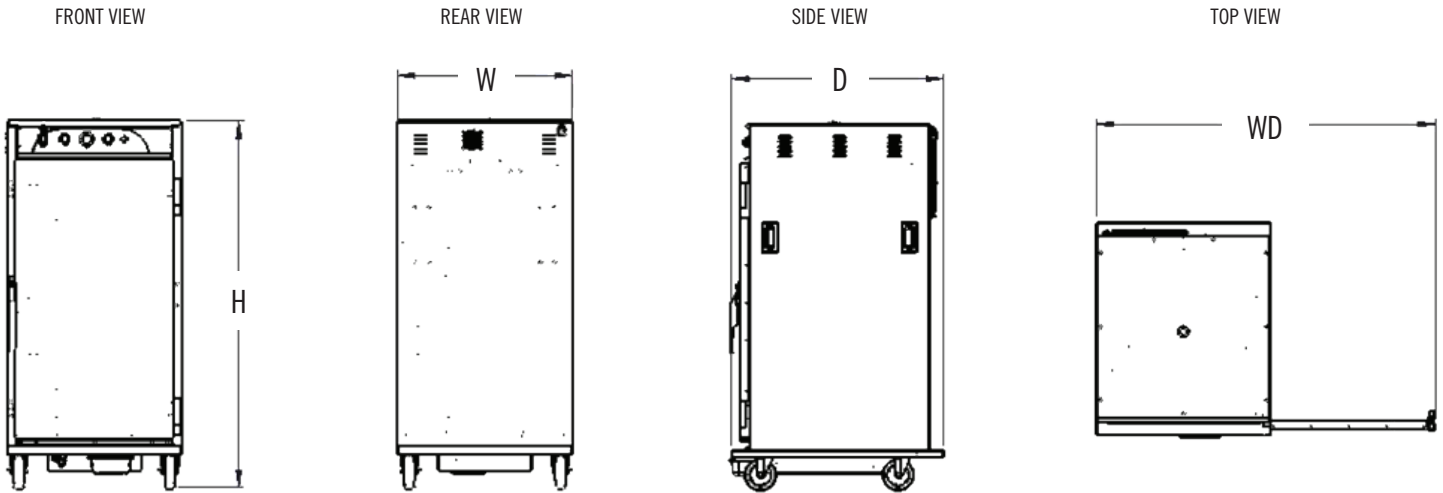

MODEL	CAPACITY 18x26 / 12x20 / *SPACING	WIDTH (W)	DEPTH (D)	HEIGHT (H)	WIDTH WITH DOOR OPEN (WD)	INTERNAL HEIGHT	VOLTAGE	WATTS	AMPS	PLUG	UNIT WEIGHT / SHIPPING WEIGHT	CLEARANCES
HCSS44W6	6 / 12 / 4.5"	28" 710 mm	34" 870 mm	43.5" 1110 mm	54.25" 137.8 mm	28" 710 mm	120V / 60Hz / 1 Ph	1950	16	NEMA 5-20P	245 lbs / 111 kg 295 lbs / 134 kg	Zero Clearance Cabinet
HCSS60W9	9 / 18 / 4.5"	28" 710 mm	34" 870 mm	58.5" 1490 mm	54.25" 137.8 mm	43" 1090 mm	120V / 60Hz / 1 Ph	1950	16	NEMA 5-20P	285 lbs / 130 kg 335 lbs / 152 kg	Zero Clearance Cabinet
HCSS74W12	12 / 24 / 4.5"	28" 710 mm	34" 870 mm	73.75" 1870 mm	54.25" 137.8 mm	58" 1480 mm	120V / 60Hz / 1Ph	1950	16	NEMA 5-20P	335 lbs / 152 kg 385 lbs / 175 kg	Zero Clearance Cabinet

* Adjustable on 1.5" centers. Also accommodates 19" x 19" and 23" x 23" screens

AVAILABLE OPTIONS & ACCESSORIES

- Left hand door hinging
- Stainless steel push handles
- Magnetic latch with key lock
- Corner bumpers of gray non-marking vinyl (set of 4)
- Perimeter bumper of gray non-marking vinyl
- Additional universal pan supports
- 6" stainless steel legs with adjustable feet for stationary floor installation *
- 6" casters with soft rubber wheels
- 8" x 26" chrome electroplated wire racks
- 208-230-50/60Hz electrical service