


## SPIKA MS700-22

115 V / 60 Hz

### MODULAR 22 INCH ICE CUBE MACHINE





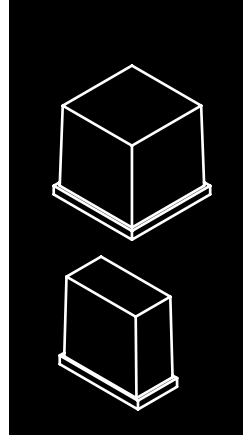






**3 YEARS WARRANTY**  
PARTS & LABOR



#### FEATURES

- ▶ PRODUCES FULL DICE OR HALF DICE ICE CUBES
- ▶ HIGH EFFICIENCY EVAPORATOR
- ▶ SMART WATER DISTRIBUTOR THAT IMPROVES DROP-OFF EFFICIENCY
- ▶ EASY ACCESS FOR SERVICE BY REMOVING THE PANELS WITH A SINGLE SCREWDRIVER
- ▶ SMART ELECTRONIC BOARD CONTROLS EVERY PARAMETER IN THE MACHINE AND SHOWS THE DIAGNOSIS OF POSSIBLE INCIDENCES
- ▶ HIGH RESISTANCE EXTERNAL FRAME IN AISI 304 STAINLESS STEEL



	 24 H	 70°F/20°C lbs (Kg)	 50°F/10°C lbs (Kg)	 90°F/32°C lbs (Kg)	 70°F/21°C lbs (Kg)	 in (mm)	 in (mm)	 <b>SPIKA HALF DICE</b> 0,9" (W) x 0,4" (D) x 1" (H) 23 mm (W) x 11 mm (D) x 26 mm (H) Average dimensions	 <b>SPIKA FULL DICE</b> 1" (W) x 0,9" (D) x 1" (H) 26 mm (W) x 23 mm (D) x 26 mm (H) Average dimensions
SPIKA MS700-22 H		<b>668</b> (303)	<b>553</b> (251)	Width <b>22"</b> (559)	Width <b>25.6"</b> (650)	Depth <b>24.45"</b> (621)	Depth <b>27.96"</b> (710)		
SPIKA MS700-22 F		-	-	Height <b>25.95"</b> (659)	Height <b>32.29"</b> (820)				

#### ACCESSORIES

##### INCLUDED



SCOOP

##### NOT INCLUDED



DOUBLE 10" FILTER  
ANTI-LIMESCALE + ANTI-CHLORINE  
CS102



10" REPLACEMENT CARTRIDGE  
ANTI-LIMESCALE + ANTI-CHLORINE  
CS10



ADAPTER PLATES



SCALE KLEEN

#### RECOMMENDED BINS

##### RECOMMENDED



S400  
+  
SPIKA  
MS700-22



SCS350  
+  
SPIKA  
MS700-22

##### OTHER POSSIBLE OPTIONS



S500  
+  
SPIKA  
MS700-22



S750  
+  
SPIKA  
MS700-22



S900  
+  
SPIKA  
MS700-22



S1050  
+  
SPIKA  
MS700-22



SCS700  
+  
SPIKA  
MS700-22



SCD900  
+  
1/2 SPIKA  
MS700-22




SCD1350  
+  
1/2 SPIKA  
MS700-22



SCD1800  
+  
1/2 SPIKA  
MS700-22

# TECHNICAL SCHEME

SPIKA MS700-22

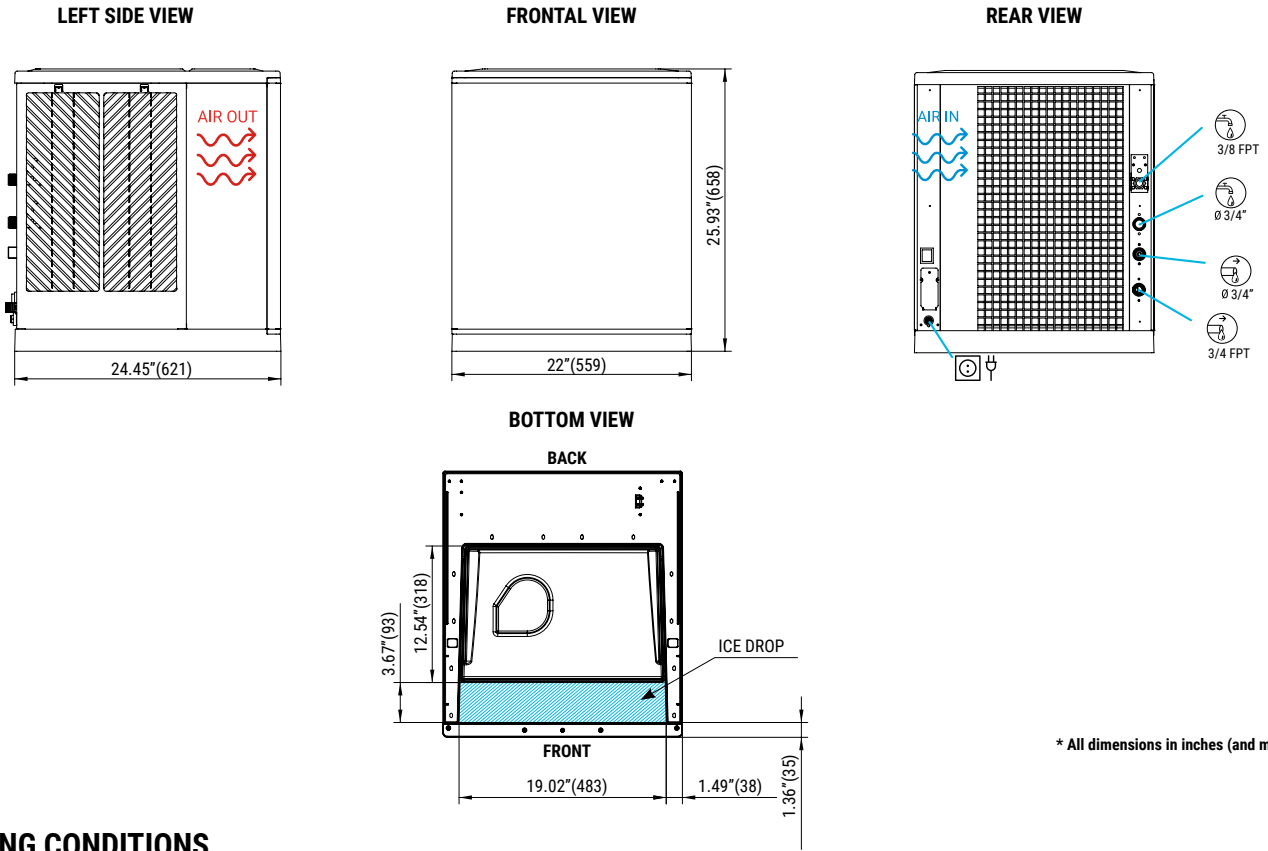

\* All dimensions in inches (and mm)

## OPERATING CONDITIONS

PRODUCTION (LBS) 60Hz

±10% V

41°F/109°F

41°F/95°F

14.5 psi (1 bar) / 87 psi (6 bar)

240/480 Ice cubes/cycle

V	Hz	ph
115	60	1N



24 H	HALF DICE					FULL DICE				
	50° 10°	60° 15°	70° 21°	86° 30°	SPDK	50° 10°	60° 15°	70° 21°	86° 30°	SPDK
10°	745	705	683	679	100	707	703	647	567	100
21°	68° 727	683	661	657	100	676	678	625	546	100
32°	90° 672	628	613	602	100	613	602	527	483	100
43°	109° 551	507	498	480	100	472	462	416	378	100

## MODELS

MODEL	ASHRAE CONDITIONS (BTu/h)	(W)	(W) 109°F	(AWG/mm <sup>2</sup> ) (n.)	FUSE	100lbs (Kwh/100 lbs) (90°F / 70°F)	gal (l/h)	HEAT REJECTED (BTu/h) (W)	(lbs)	(lbs)			
SPIKA MS700-22 A	13,853	4,060	1,300	14/2.5	3	25	4.92	17	4.5	9,076	2,531	155.21	180
SPIKA MS700-22 W	13,853	4,060	1,070	14/2.5	3	25	-	-	-	8,636	2,531	155.21	180



ITV Ice Makers, Inc.  
9550 Satellite Blvd, Suite 100  
Orlando, FL 32837  
Phone: 1 407 826 1860 | Fax: 1 407 826 1861  
Toll Free: 1 888 488 1423  
sales@itvice.com | www.itvice.com



SERVICE  
service@itvice.com  
Skype: service@itvice.com  
PHONE: +1 888 488 1423  
FROM 8AM TO 5PM EST



2 ADDITIONAL YEARS  
ON COMPRESSOR &  
EVAPORATOR  
Read our warranty policy  
to know more about  
limitations and exclusions

