



ICE QUEEN IQ F 1200 220 V / 60 Hz

MODULAR FLAKE ICE MACHINE

3 YEARS
WARRANTY
PARTS & LABOR

FEATURES

- ▶ PRODUCES FLAKE ICE
 - ▶ HIGH EVAPORATOR EFFICIENCY: LOWER ENERGY CONSUMPTION AND HIGHER ICE PRODUCTION
 - ▶ FRONT LED DISPLAY FOR QUICK DIAGNOSTICS
 - ▶ I-CHECK SMART SYSTEM CONTROLS AND DETECTS PARAMETERS AND FAULTS
 - ▶ ELECTRONIC CONTROL. ON/OFF LIGHTED SWITCH IN FRONT PANEL
 - ▶ STAINLESS STEEL AUGER TO MAXIMIZE LIFESPAN
 - ▶ POWERFUL GEAR MOTOR
 - ▶ AISI 304 STAINLESS STEEL BODY
 - ▶ OPTICAL PINPOINT CONTROL SYSTEM TO SET ICE STOCK LEVEL
 - ▶ EASY ACCESS FOR SERVICE AND INSTALLATION
- !** THE INSTALLATION OF AN ANTI-SCALE FILTER AND PERIODIC CLEANING ARE RECOMMENDED IN AREAS WITH MEDIUM OR HIGH LIMESCALE CONTENT (HARD WATER)



	lbs 24 H	70°F/21°C 50°F/10°C	90°F/32°C 70°F/21°C		
		lbs (Kg)	lbs (Kg)	in (mm)	in (mm)
IQ F 1200 A		1250 (567)	930 (422)	Width 22.01" (559) Depth 24.49" (622) Height 28.04" (712)	Width 25.04" (636) Depth 27.37" (695) Height 32.88" (835)
IQ F 1200 W		-	-		



FLAKE ICE
85% ICE HARDNESS FACTOR

ACCESSORIES

NOT INCLUDED (OPTIONAL)



10" FILTER
ANTI-LIMESCALE + ANTI-CHLORINE
CS-101 K



10" REPLACEMENT CARTRIDGE
ANTI-LIMESCALE + ANTI-CHLORINE
CS10



SCALE KLEEN

RECOMMENDED BINS



S400-22 + IQ F 1200

S500 + IQ F 1200

S750 + IQ F 1200

S900 + IQ F 1200

S1050 + IQ F 1200

SCS350 + IQ F 1200

SCS700 + IQ F 1200





SCD900 + IQ F 1200

SCD1400 + IQ F 1200

SCD1800 + IQ F 1200

TECHNICAL SCHEME

ICE QUEEN F 1200

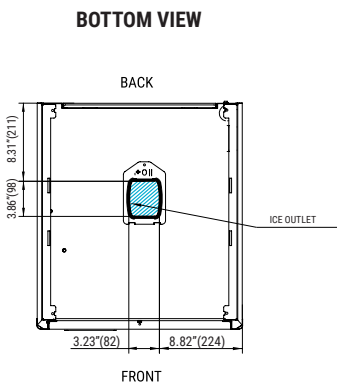

* All dimensions in inches (and mm)

OPERATING CONDITIONS

PRODUCTION (LBS) 60Hz

Voltage	Temperature	ASHRAE Conditions	R404	IQ F 1200 AIR COOLED				IQ F 1200 WATER COOLED			
				50°F	60°F	70°F	86°F	50°F	60°F	70°F	86°F
±10% V	50°F/109°F	CONDICIONES ASHRAE		1290	1259	1208	1111	-	-	-	-
50°F/109°F	41°F/100°F			1250	1186	1078	981	-	-	-	-
41°F/100°F	14.5 psi (1 bar) / 87 psi (6 bar)			1087	992	930	842	-	-	-	-
14.5 psi (1 bar) / 87 psi (6 bar)				930	827	688	628	-	-	-	-

MODELS

Model	Temp. Ev. (°F)	ASHRAE (BTU/h)	(W)	(W) 109°F	(AWG/mm²)	(n.)	FUSE	100lbs (Kwh/100 lbs)	gal/100lbs (l/h)	HEAT REJECTED (BTU/h)	(W)	(lbs)	(lbs)
IQ F 1200 A	5°	10,315	3,023	1,830	16/1.5	3	20	4.36	12 17.6	13,502	3,997	185	205
IQ F 1200 W	-	-	-	-	-	-	-	-	-	-	-	-	-



ITV Ice Makers, Inc.
9550 Satellite Blvd, Suite 100
Orlando, FL 32837
Phone: 1 407 826 1860 | Fax: 1 407 826 1861
Toll Free: 1 888 488 1423
sales@itvice.com | www.itvice.com



SERVICE
service@itvice.com
Skype: service@itvice.com
PHONE: +1 888 488 1423
FROM 8AM TO 5PM EST



2 ADDITIONAL YEARS ON COMPRESSOR & EVAPORATOR
Read our warranty policy to know more about limitations and exclusions

