

**MODEL: IRR-AGN300CR
 IRR-AGN600CR**

Slimline Reach-in Refrigerators



General Strengths

- ✓ **Sanitation.** The interior cabinet is built with rounded corners (extensive radius for easy cleaning). Quick ability to take off shelves and slides for interior cleaning. Each cabinet has a drain at the bottom of the unit. When cleaning the unit make sure the drain hose is routed to a floor drain.
- ✓ **Doors.** Self-closing door system with permanent pressure. Stay open feature included when door remains open after 95 degrees. All doors include triple chamber door gaskets, easy to remove and snap in. Doors are field reversible.
- ✓ **Control systems.** Higher precision in managing temperature settings. Greater ability for the adjustment of temperatures ranges as per the end user's requirement.
- ✓ **100% Tested.** All condenser units are tested 100%, in helium chambers to refrigerant leak detections.
- ✓ **Lighting.** LED lighting in cabinet sides reduces the energy consumption by 80% and 90% compared to a traditional bulb. Provides a much better light quality.
- ✓ **Certified.** Audited and Certified by INTERTEK for compliance with UL 471 and NSF 7.



Revision:01 Date: 02/05/2024 IRR-AGN300_600CR

ETL LISTED TO UL471 STANDARD AND SANITATION CLASSIFIED TO NSF7 – WE RESERVE THE RIGHT TO CHANGE SPECIFICATIONS WITHOUT PRIOR NOTICE

MODEL: IRR-AGN300CR
IRR-AGN600CR

Slimline Reach-in Refrigerators

STANDARD FEATURES

➤ **Exterior**

- AISI 304 Stainless Steel.
- Completely injected compact structure.

➤ **Interior**

- AISI 304 Stainless Steel.
- Wide rounded corners to aid cleaning.
- LED lighting, RGB.
- Internal drain.

➤ **Door**

- Self-closing with stay open feature.
- Integrated door handles.
- Stainless Steel covered hinges.
- Triple chamber snap in door seals for easy removal.
- Door lock provided.
- Double pane glass door, tempered and low-e.

➤ **Insulation**

- CFC- Free polyurethane insulation, entire cabinet structure is foamed-in using a high-density polyurethane insulation.
- Low GWP & Zero ODP effect.

➤ **Casters**

- 4" diameter casters.
- Locks provided on front set.

➤ **Shelving**

- (4/8) Three plastic coated wire shelves single door with stainless steel tray slides included.
- Dimensions WxD: 12-51/64" x 20-55/64" (325 x 530 mm).

➤ **Refrigeration**

- Temperature and defrost regulated by digital controller.
- Evaporative pan.
- Evaporator coil coated with anti-corrosion material.
- **Refrigeration capacity:**
 IRR-AGN300CR– 1510 Btu/h(14°F)/ 443 W(-10°C).
 IRR-AGN600CR– 2117 Btu/h(14°F)/ 621 W(-10°C).

➤ **Electrical**

- Cord and NEMA 5-15P plug,
- Electrical connection is 115V / 1ph / 60 Hz.



➤ **ETL Listed to UL471 Standard and Sanitation classified to NSF7.**

OPTIONAL FEATURES

- ✓ Stainless Steel wire shelf.
- ✓ Set of OK 6" legs, height adjustable from 5" to 8".
- ✓ Set of 6" legs, height adjustable from 5" to 8".
- ✓ Electrical connection is 230 V / 1 ph / 50 Hz (Plug type and consumption varies).

MODEL: IRR-AGN300CR IRR-AGN600CR	Slimline Reach-in Refrigerators
---	--




MODELS	Dimensions (inches) (mm)			Doors	Shelves	Ref.	Ref. Weight (Lbs.) <small>(gr.)</small>	Temperature Range (°F) (°C)	Cond. Unit (H.P)	Capacity (Cu.Ft.) (L)	Case Amps 115V	Net weight (Lbs.) (Kg.)
	W	D	H									
IRR-AGN300CR	19 <small>(482)</small>	27-7/8 <small>(709)</small>	82-1/16 <small>(2085)</small>	1	4	R290	0,22 <small>(100)</small>	36 °F/43 °F <small>(+2°C/+6°C)</small>	1/3	11 <small>(325)</small>	3,60	300 <small>(136)</small>
IRR-AGN600CR	38-3/8 <small>(974)</small>	27-7/8 <small>(709)</small>	82-1/16 <small>(2085)</small>	2	8	R290	0,24 <small>(110)</small>	36 °F/43 °F <small>(+2°C/+6°C)</small>	3/8	26,30 <small>(745)</small>	4,85	414 <small>(188)</small>

PLAN VIEW

ELEVATION

RIGHT VIEW

PLANT VIEW

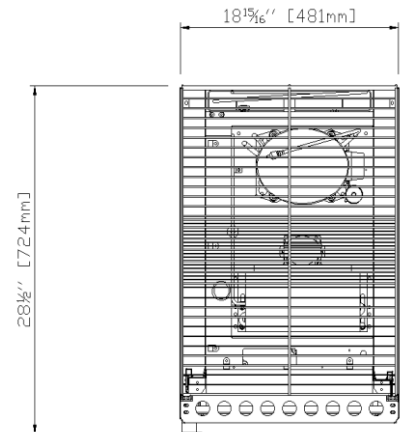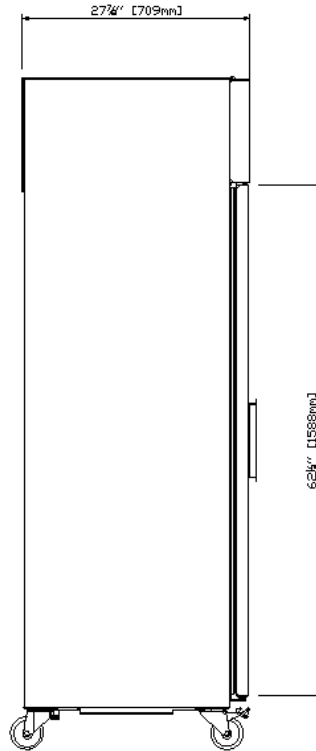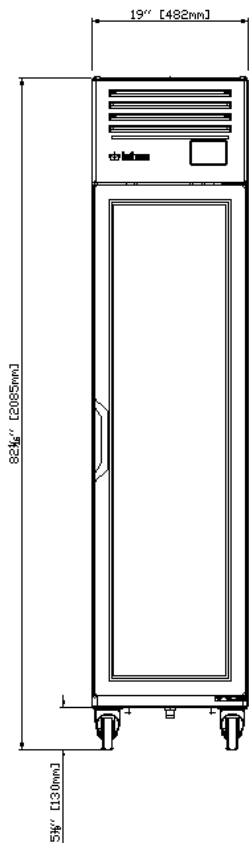

IRR-AGN300CR

Revision:01 Date: 02/05/2024 IRR-AGN300_600CR

ETL LISTED TO UL471 STANDARD AND SANITATION CLASSIFIED TO NSF7 – WE RESERVE THE RIGHT TO CHANGE SPECIFICATIONS WITHOUT PRIOR NOTICE



INFRICO-North America Corporate División
 1409NW 84th Avenue, Doral FL 33126
 (305) 777 9599 ext.700 / f (305) 777 9598
 Toll Free 855-340-4637

www.infrico.us
sales@infrico.com




MODEL: IRR-AGN300CR
IRR-AGN600CR

Slimline Reach-in Refrigerators

ELEVATION

RIGHT VIEW

PLANT VIEW

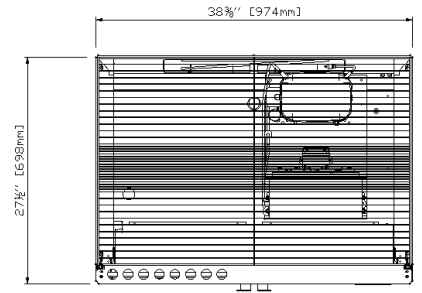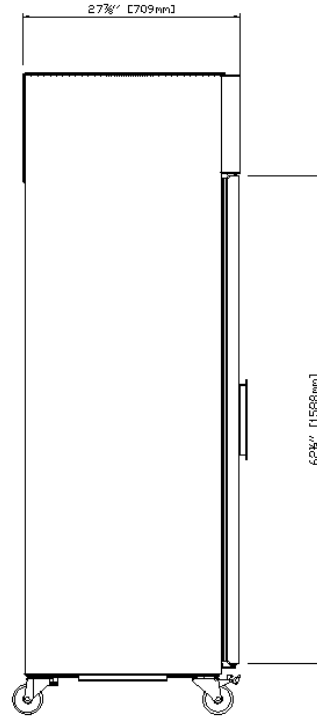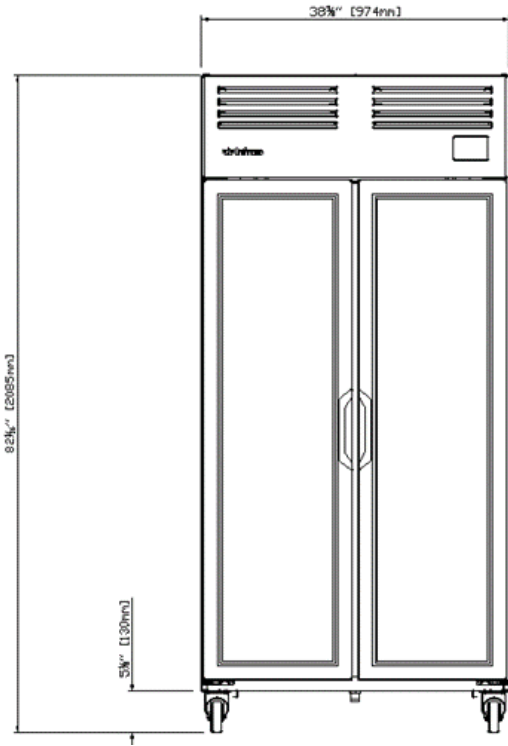

IRR-AGN600CR

Revision:01 Date: 02/05/2024 IRR-AGN300_600CR

ETL LISTED TO UL471 STANDARD AND SANITATION CLASSIFIED TO NSF7 – WE RESERVE THE RIGHT TO CHANGE SPECIFICATIONS WITHOUT PRIOR NOTICE



INFRICO-North America Corporate División
 1409NW 84th Avenue, Doral FL 33126
 (305) 777 9599 ext.700 / f (305) 777 9598
 Toll Free 855-340-4637

www.infrico.us
sales@infrico.com