

Project: _____

Location: _____

Item #: _____ Quantity: _____

Model #: _____

MODEL: IBC-ABT201S

Blast Chiller and Shock Freezer – 20 Tray (Wheels outside) Remote System



ABT201S

General Strengths

- ✓ **Function Blast Chillers.** Blast chillers and freezers, quickly reduce the core temperature of the products, whether they are cooked or fresh, conserving their fresh texture, hygiene and quality, whilst reducing the risk of bacteria generating.
- ✓ **Sanitation.** The interior cabinet is built with rounded corners (extensive radius for easy cleaning).
- ✓ **Doors.** Self-closing door system with permanent pressure. Stay open feature included when door remains open after 95 degrees. All doors include triple chamber door gaskets, easy to remove and snap in.
- ✓ **Control systems.** Greater ability for the adjustment of temperature ranges as per the end user's requirements.
- ✓ **Certified.** Audited and Certified by INTERTEK for compliance with UL 471 and NSF 7. AENOR audited and certified by internationally recognized firm. ISO 9001:2015 (Quality); ISO 14001:2015 (Environmental); OSHAS 18001:2007 (Prevention and Worker Safety).

Refrig. Capacity (BTU/h)
(rated at 14°F/-13°F evap. Temp.)
34370 / 18380

MODEL	Dimensions (inches) (mm)			Nº Doors	Car Entry	Ref.	Ref. Weight (Lbs.) (gr.)	Temp. Range (°F) (°C)	Capacity Chiling/Freezing (Lbs.) (Kg)	Cond. Unit. H.P.	Case Amps (220V)	Crated Weight (Lbs.) (Kg.)
	W	D	H									
IBC-ABT201S	47-1/4	43-1/8	89-3/4	1	12x20" GN1/1	R404A	7.7	-40°F	330 / 225	6.1 Remote System	5.0	1500
	1200	1095	2280									

ETL LISTED TO UL471 STANDARD AND SANITATION CLASSIFIED TO NSF7 – WE RESERVE THE RIGHT TO CHANGE SPECIFICATIONS WITHOUT PRIOR NOTICE



Infrico USA Corp.
 1049 N.W. 84th Avenue
 Doral, FL 33126
 1.305.777.9599 Office
 1.305.777.9598 Fax

www.infrico.us
sales@infrico.com

APPROVALS: _____ **AVAILABLE AT:** _____

MODEL: IBC-ABT201S
Blast Chiller and Shock Freezer – 20 Tray (Wheels outside) Remote System
STANDARD FEATURES
➤ Exterior

- AISI 304 Stainless Steel,
- Completely injected compact structure,
- Constructed following HACCP regulations.

➤ Interior

- AISI 304 Stainless Steel,
- Sealed interior floors and rounded cabinet corners,
- Includes a heated conical probe which is easy to use and remove.

➤ Insulation

- CFC-Free polyurethane insulation, entire cabinet structure is foamed-in place using a high-density polyurethane insulation,
- Low GWP & Zero ODP effect.

➤ Doors

- Polyurethane insulated and self-closing doors with stay open feature,
- Heavy-duty hinges with horizontal and vertical adjustment,
- Triple chamber snap in door gaskets for easy removal and cleaning,
- Heated door frame to avoid accumulation of ice.

➤ Refrigeration

- Control panel with an easy to read screen and menu,
- Manual defrost during cycles and automatic defrost during maintenance,
- And automatic defrost during refrigerated hold mode after each cycle,
- Evaporator coil coated with anti-corrosion material 100% Polyester,
- Forced air refrigeration system,
- **Blast chilling:** +194°F (+90°C) to +37°F (+3°C) in less than 90 minutes.
- **Blast freezing:** +194°F (+90°C) to 0°F (-18°C) in less than 4 hours.

➤ Control

- Interactive control screen & menu,
- Up to 99 different customized cycles,
- USB Connection.

➤ Electrical

- Cord only included,
- Electrical connection is 220V/3ph/60 Hz,


➤ ETL Listed to UL471 Standard and Sanitation classified to NSF7.

ETL LISTED TO UL471 STANDARD AND SANITATION CLASSIFIED TO NSF7 – WE RESERVE THE RIGHT TO CHANGE SPECIFICATIONS WITHOUT PRIOR NOTICE

MODEL: IBC-ABT201S

Blast Chillers and Shock Freezers – 20 Trays (Wheels outside)

PLAN VIEW

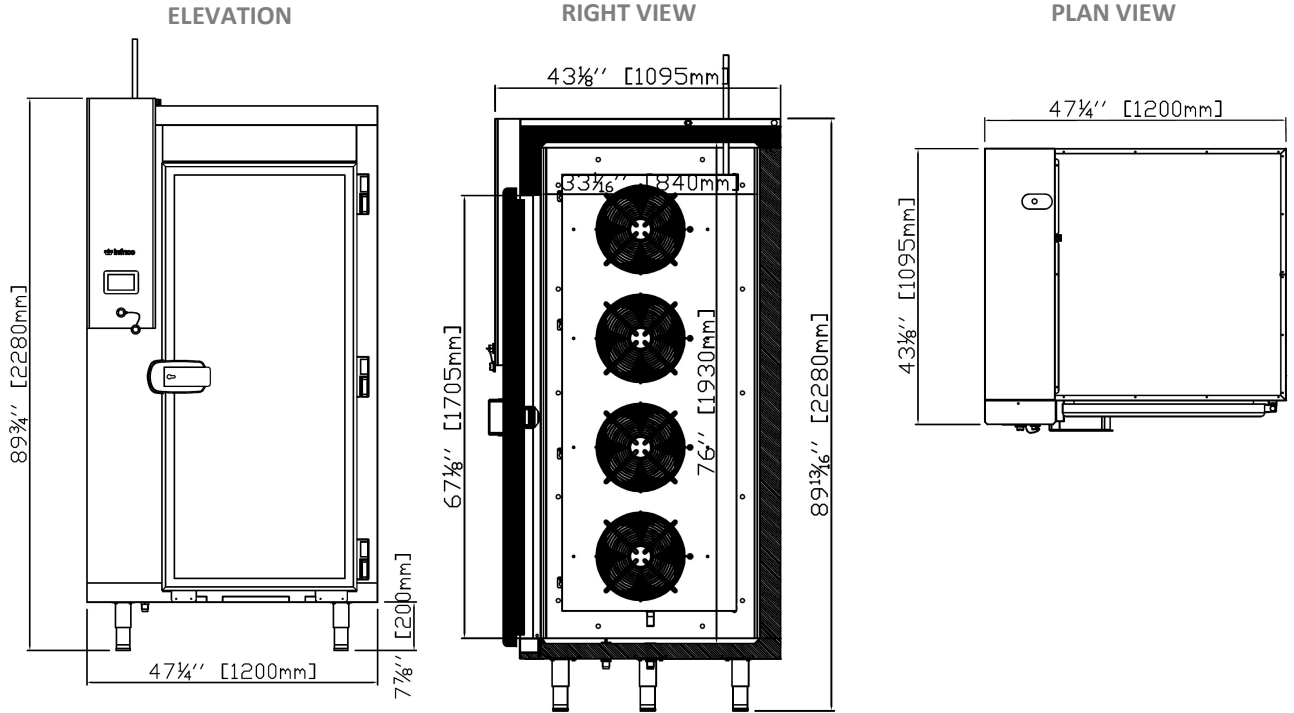

ETL LISTED TO UL471 STANDARD AND SANITATION CLASSIFIED TO NSF7 – WE RESERVE THE RIGHT TO CHANGE SPECIFICATIONS WITHOUT PRIOR NOTICE



Infrico USA Corp.
 1049 N.W. 84th Avenue
 Doral, FL 33126
 1.305.777.9599 Office
 1.305.777.9598 Fax

www.infrico.us
sales@infrico.com

APPROVALS: _____ AVAILABLE AT: _____