

Deep Undercounter/Worktops with Drawers

SUR/SWR Series

SUR-46-D2 SUR-67-D2 SUR-67-D4 SU(W)R-93-D2
 SWR-46-D2 SWR-67-D2 SWR-67-D4 SU(W)R-93-D4
 SU(W)R-93-D6



Item # _____

Standard Features

- Our deep undercounter units are designed with durability and strength that you will not find in any other products in its class.
- All stainless steel interior and exterior construction for a clean & safe food environment. Coved corner floor to meet NSF requirements.
- Drawers: Heavy duty drawer slides with gentle self closing mechanism, full length recessed drawer handles; accommodates (2) 12" x 20" x 8" deep pans per drawer (pans sold separately).
- Doors: Heavy duty stainless steel doors with full length recessed door handles; interior instep design for added insulation and protection of door gaskets.
- Factory balanced refrigeration system, environmentally friendly R-134A Refrigerators.
- Refrigerators maintain product temperatures from 33° to 38°F.
- Side breathing refrigeration system for built-in applications.



SUR-46-D2



SUR-67-D4



SWR-93-D2

Options & Accessories

- 6" adjustable legs (set of 4)
- 3" casters (set of 4, front 2 w/ clips)
- Additional epoxy coated shelves
- Universal tray slides
- 220 volts / 50 cycles / 1 phase



*Conforms to UL & NSF-7 standards

| Deep Undercounter with Drawers | Model | Door | Drawers | Capacity (cu. ft.) | Amps | HP | Voltage | Nema Plug | Cord Length | Cabinet Dimension | | | Shipping | |
|--------------------------------|-----------|------|---------|--------------------|------|-----|---------|-----------|-------------|--------------------|---------|-----|----------|-------|
| | | | | | | | | | | W | D* | H** | Wt. | Cubes |
| | SUR-46-D2 | 0 | 2 | 9.9 | 5.4 | 1/4 | 115 | 5-15P | 8' | 46" | 32-1/2" | 36" | 289 | 43 |
| | SUR-67-D2 | 1 | 2 | 18.6 | 6.5 | 1/3 | 115 | 5-15P | 8' | 67-1/4" | 32-1/2" | 36" | 363 | 62 |
| | SUR-67-D4 | 0 | 4 | 18.6 | 6.5 | 1/3 | 115 | 5-15P | 8' | 67-1/4" | 32-1/2" | 36" | 403 | 62 |
| | SUR-93-D2 | 2 | 2 | 26.5 | 6.5 | 1/3 | 115 | 5-15P | 8' | 93" | 32-1/2" | 36" | 440 | 91 |
| | SUR-93-D4 | 1 | 4 | 26.5 | 6.5 | 1/3 | 115 | 5-15P | 8' | 93" | 32-1/2" | 36" | 480 | 91 |
| | SUR-93-D6 | 0 | 6 | 26.5 | 6.5 | 1/3 | 115 | 5-15P | 8' | 93" | 32-1/2" | 36" | 520 | 91 |
| | Model | Door | Drawers | Capacity (cu. ft.) | Amps | HP | Voltage | Nema Plug | Cord Length | Cabinet Dimensions | | | Shipping | |
| | | | | | | | | | | W | D* | H** | Wt. | Cubes |
| | SWR-46-D2 | 0 | 2 | 9.9 | 5.4 | 1/4 | 115 | 5-15P | 8' | 46" | 32-1/2" | 40" | 289 | 43 |
| | SWR-67-D2 | 1 | 2 | 18.6 | 6.5 | 1/3 | 115 | 5-15P | 8' | 67-1/4" | 32-1/2" | 40" | 363 | 62 |
| | SWR-67-D4 | 0 | 4 | 18.6 | 6.5 | 1/3 | 115 | 5-15P | 8' | 67-1/4" | 32-1/2" | 40" | 403 | 62 |
| | SWR-93-D2 | 2 | 2 | 26.5 | 6.5 | 1/3 | 115 | 5-15P | 8' | 93" | 32-1/2" | 40" | 440 | 91 |
| | SWR-93-D4 | 1 | 4 | 26.5 | 6.5 | 1/3 | 115 | 5-15P | 8' | 93" | 32-1/2" | 40" | 480 | 91 |
| | SWR-93-D6 | 0 | 6 | 26.5 | 6.5 | 1/3 | 115 | 5-15P | 8' | 93" | 32-1/2" | 40" | 520 | 91 |

* Depth does not include 1" bumper.

** Height does not include 5" casters (6" overall) or 6" optional legs.

Deep Undercounter/Worktops with Drawers

SUR/SWR Series



Specifications

Construction

Heavy duty stainless steel exterior top, front and sides. Galvanized back panel. Interior completely constructed of heavy duty stainless steel with coved corner floor. Door is heavy duty stainless steel exterior and interior, in-step design with hinged solid doors and positive seal. Drawer is heavy duty stainless steel with heavy duty drawer slides, self closing with a gentle close. Accommodates (2) 12" x 20" x 8" deep pan capacity (pans sold separately). Doors and Drawers provided with magnetic door gaskets, removable without tools, self-closing. Doors with 120° stay open feature / Drawers are full extension. Recessed full length handles.

Door / Drawer openings have a plastic breaker strips to retard condensate formation. Unit comes complete with a 2" Ecomate CFC-Free polyurethane insulation, foamed in place.

Refrigeration system

Self-contained capillary tube system using environmentally friendly (CFC Free) R-134a refrigerant. Side mounted compressor on right side for built-in applications. Evaporator coil is mounted to interior top panel encased in stainless steel. Large fan motor and fan blades for better air flow.

Tables are designed to maintain temperatures between 33° F to 38° F in the interior cabinet.

Shelving


(2) Epoxy coated shelving per door with channel slides for supports. Adjustable in 2" increments per shelf. Drawers come standard with (2) pan dividers.

Others

Unit is supplied standard with a 8' cord and plug (Nema 5-15p). Standard with 5" diameter casters, front two with brakes.

Warranty

3 year parts and labor warranty plus 2 additional year compressor warranty. (Continental U.S.A. & Canada only).

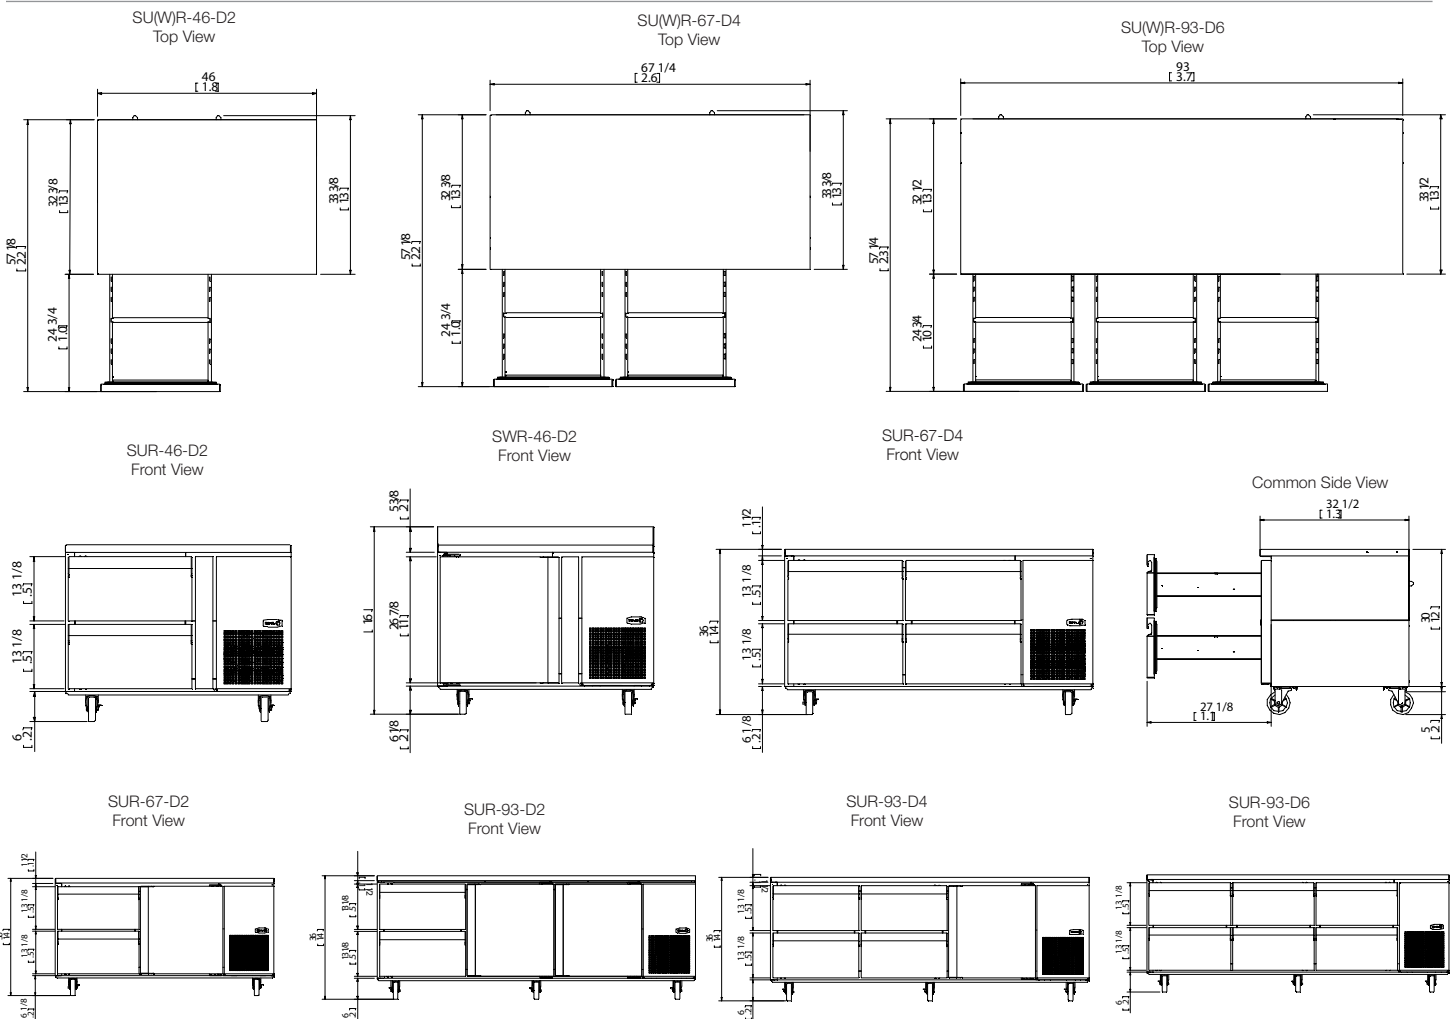

The manufacturer reserves the rights to modify materials and specifications without notice.