

# Refrigerated Chef Base

## FCBR Series



FCBR-52    FCBR-52-60    FCBR-72  
 FCBR-84    FCBR-96

Item # \_\_\_\_\_

### Standard Features

- Our chef bases are designed with durability and strength that you will not find in any other products in its class.
- All stainless steel interior and exterior construction for a clean & safe food environment. Coved corner floor to meet NSF requirements. Drip resistant "V" marine edge protects against spills.
- Drawers: Heavy duty drawer slides, full length recessed drawer handles; accommodate: FCBR-52 (2) 12" x 20" x 4" / (3) 1/6 th x 4" deep pans per drawer. FCBR-60/96 (3) 12" x 20" x 4" deep pans per drawer. FCBR-72 (2) 12" x 20" x 4" deep pans per drawer. FCBR-84 (3) 12" x 20" on right drawer / (2) 12" x 20" x 4" deep pans on the left drawer. (pans sold separately).
- **Forced air inside** to keep products fresher and maintain a constant temperature between **32°F to 41°F** in refrigeration equipment.
- Enhanced digital controller to keep food quality for longer period of time.
- Side breathing refrigeration system for built-in applications.
- **2" Ecomate** CFC-free polyurethane insulation foamed in place for extra strength and energy efficiency. Environmentally friendly with zero ozone depletion (ODP) and zero global warming potential (GWP).
- Equipment mounted on heavy duty **4" casters**.



FCBR-52



FCBR-52-60



FCBR-96



### Options & Accessories

- 6" Adjustable legs
- 220 volts / 50 cycles / 1 phase



\*Conforms to UL & NSF-7 standards

Chef Base	Model	Drawers	Pans	Cord Length	HP	Volt	Amps	NEMA Plug	Cabinet Dimensions L/*D/H			Shipping (Wt. Cubes)	
	FCBR-52	2	36	8'	1/6	115	2.7	5-15P	53"	32"	25-3/8"	380	38
FCBR-52-60	2	36	8'	1/6	115	2.7	5-15P	60"	32"	25-3/8"	410	43	
FCBR-72	4	48	8'	1/4	115	5	5-15P	72-1/2"	32"	25-3/8"	515	51	
FCBR-84	4	60	8'	1/4	115	5	5-15P	84"	32"	25-3/8"	560	59	
FCBR-96	4	72	8'	1/4	115	5	5-15P	96-5/8"	32"	25-3/8"	640	66	

\* Depth does not include 1" bumper / All specifications are subject to change without notice.

# Refrigerated Chef Base

## FCBR Series



### Specifications

#### Construction

Heavy duty stainless steel exterior top, front and sides. Galvanized back panel. Interior completely constructed of heavy duty stainless steel with coved corner floor. Drawer is heavy duty stainless steel with heavy duty drawer slides, self closing. Accommodates: FCBR-52 (2) 12" x 20" x 4" / (3) 1/6 th x 4" deep pans per drawer. FCBR-60/96 (3) 12" x 20" x 4" deep pans per drawer. FCBR-72 (2) 12" x 20" x 4" deep pans per drawer. FCBR-84 (3) 12" x 20" on right drawer / (2) 12" x 20" x 4" deep pans on the left drawer. (pans sold separately).

Drawers provided with magnetic door gaskets, removable without tools, self-closing. Drawers are full extension. Recessed full length handles.

Unit comes complete with a 2" Ecomate CFC-

Free polyurethane insulation, foamed in place.

#### Refrigeration System

Self-contained capillary tube system using environmentally friendly (CFC Free) R-290 refrigerant. Side mounted compressor on right side for built-in applications. Evaporator coil is mounted to interior top panel encased in stainless steel. Large fan motor and fan blades for better air flow.

Tables are designed to maintain temperatures between 33° F to 38° F in the interior cabinet.


Energy savings digital controllers and thermostats. Automatic defrost, time initiated.

#### Others

Unit is supplied standard with an 8' cord and plug (Nema 5-15p).

#### Warranty

3 year parts and labor warranty plus 2 additional year compressor warranty. (Continental U.S.A. & Canada only).

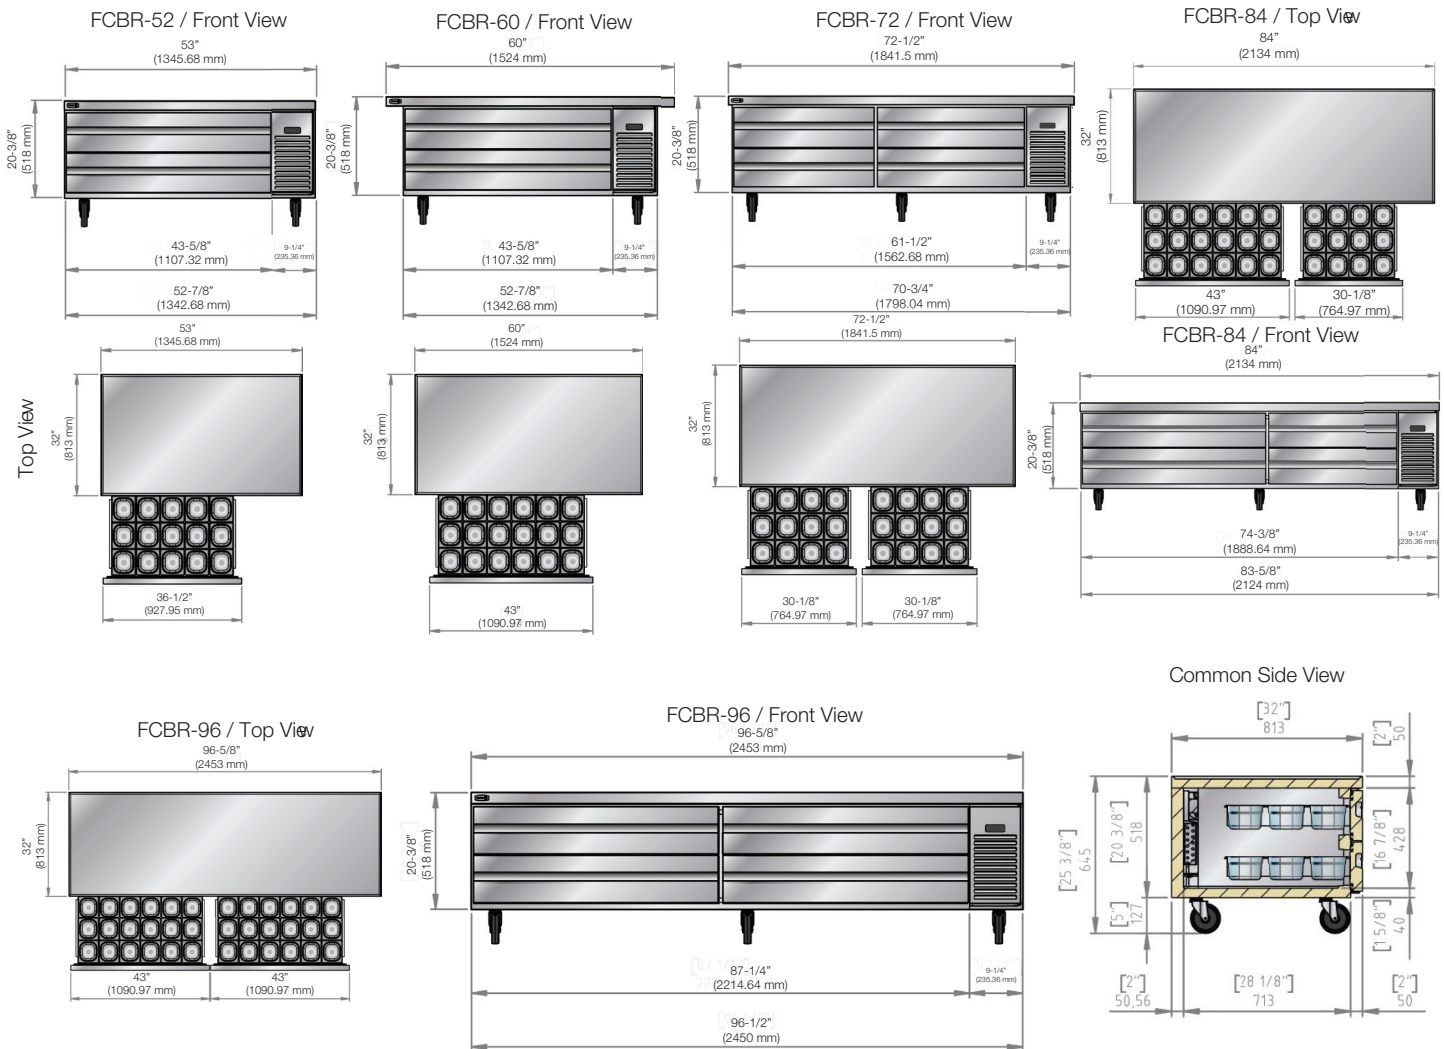

The manufacturer reserves the rights to modify materials and specifications without notice. 03012018