

Project: \_\_\_\_\_

Location: \_\_\_\_\_

Item #: \_\_\_\_\_ Quantity: \_\_\_\_\_

Model #: \_\_\_\_\_

**MODEL: IMD-ERC15**

**MERCHANDISERS: Glass Door Merchandiser ERC Series.**

### Benefits

- ✓ This model has been designed for convenient access, fast service and attractive display.
- ✓ Use of environmentally friendly **R290 hydrocarbon** refrigerant and electronic fan motors for an improved energy efficiency.
- ✓ **Lighting.** LED lighting reduces the energy consumption and provides more lighting in the cabinet.
- ✓ **100% Tested.** All condenser units are 100% tested, in helium chambers for refrigerant leak detections.
- ✓ **Certified.** Audited and Certified by **INTERTEK** for compliance with UL 471 and NSF 7. AENOR audited and certified by internationally recognized firm. ISO 9001:2015 (Quality); ISO 14001:2015 (Environmental); OSHAS 18001:2007 (Prevention and Worker Safety).



MODEL	Dimensions (inches) (mm)			Nº Doors	Nº Trays	Ref.	Ref. Weight (Lbs.) (gr.)	Temp. Range (°F) (°C)	Capacity (Cu. Ft.) (L)	Cond. Unit. H.P.	Case Amps 115V.	Crated Weight (Lbs.) (Kg.)
	W	D	H									
IMD-ERC15	23-5/8 600	24-3/8 620	32-9/16 827	1	2	R290	0.22 100	39°F /46°F +4°C / +8°C	5.3 150	1/4	3	154 70

ETL LISTED TO UL471 STANDARD AND SANITATION CLASSIFIED TO NSF7 - WE RESERVE THE RIGHT TO CHANGE SPECIFICATIONS WITHOUT PRIOR NOTICE



AUTODESK  
REVIT

**Infrico USA Corp.**  
1409 N.W. 84th Avenue  
Doral, FL 33126  
1.305.777.9599 Office  
1.305.777.9598 Fax

[www.infrico.us](http://www.infrico.us)  
sales@infrico.com

APPROVALS: \_\_\_\_\_  
AVAILABLE AT: \_\_\_\_\_

**MODEL: IMD-ERC15**

**MERCHANDISERS: Glass Door Merchandiser ERC Series.**

## STANDARD FEATURES

### ➤ Exterior

- Plastic coated steel exterior.
- Compact structure totally injected.

### ➤ Interior

- Plastic coated steel interior.
- LED lighting.
- Canopy lighting.

### ➤ Insulation

- Insulation by free CFC's polyurethane, foam high-pressure injected with density 40 Kg/m<sup>3</sup>.
- Zero ODP and Low GWP.

### ➤ Doors

- Doors with double pane glass (6-10-4).

### ➤ Shelves

- (2) inner shelves (ERC17).
- Inner shelves dimensions: 460x400 mm.
- Brackets and shelves easily removable for cleaning.

### ➤ Refrigeration

- Temperature and defrost regulated by a digital controller.
- Ventilated condensation system.
- Forced evaporation system.
- Stainless steel evaporative tray.
- Evaporators treated with anti-corrosion polyester Epoxy.
- Climatic class 4 (30°C, 55%RH).
- R290 and electronic fans.

### ➤ Electrical

- Electrical connection: 115 V / 1 ph / 60 Hz.



### OPTIONAL


- ✓ Additional shelves (ERC17),
- ✓ Electrical connection 220 V / 1 ph / 60 Hz.
- ✓ Electrical connection 220 V / 1 ph / 50 Hz.

## PLAN VIEW


ELEVATION



RIGHT VIEW

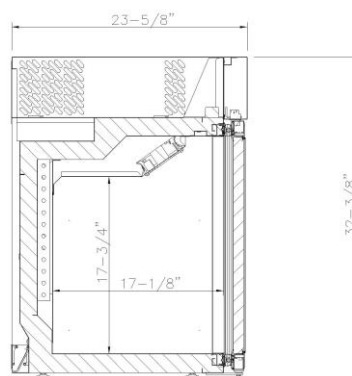

PLAN VIEW



FTL LISTED TO UL471 STANDARD AND SANITATION CLASSIFIED TO NSF7 - WE RESERVE THE RIGHT TO CHANGE SPECIFICATIONS WITHOUT PRIOR NOTICE