

Project: _____
 Location: _____
 Item #: _____ Quantity: _____
 Model #: _____

MODEL: **IMD-ERV15SD / IMD-ERV25SD**
IMD-ERV35SD

BOTTLES COOLER: BLACK FINISH SOLID DOOR



General Strengths

- ✓ **Sanitation.** Quick ability to take off shelves and slides for interior cleaning.
- ✓ **Doors.** All doors include door gaskets, easy to remove and snap in.
- ✓ **Control systems.** Higher precision in managing temperature settings. Greater ability for the adjustment of temperatures ranges as per the end user's requirement.
- ✓ **100% Tested.** All condenser units are tested 100%, in helium chambers for refrigerant leak detections.
- ✓ **Certified.** Audited and Certified by **INTERTEK** for compliance with UL 471 and NSF 7. EQA audited and certified by internationally recognized firm. ISO 9001:2015 (Quality); ISO 14001:2015 (Environmental); ISO 45001:2018 (Prevention and Worker Safety)
- ✓ **Lighting.** LED lighting in cabinet sides reduces the energy consumption by 80% and 90% compared to a traditional bulb. Provides a much better light quality.



Review:03 Date: 11/02/2023 IMD-ERV15_25_35_SD

ETL LISTED TO UL471 STANDARD AND SANITATION CLASSIFIED TO NSF7 – WE RESERVE THE RIGHT TO CHANGE SPECIFICATIONS WITHOUT PRIOR NOTICE

**MODEL: IMD-ERV15SD / IMD-ERV25SD
 IMD-ERV35SD**

BOTTLES COOLER: BLACK FINISH SOLID DOOR

STANDARD FEATURES

➤ **Exterior**

- Plastic-coated steel, black.
- Completely injected compact structure.
- Door lock.
- Leveling feet.

➤ **Interior**

- Interior grey plastic-coated steel.
- LED lighting.

➤ **Doors**

- Triple chamber snap in door seals for easy removal.
- Black plastic handle included on the door.

➤ **Insulation**

- Polyurethane with high density 40kg/m³, CFSs free, zero ODP and low GWP.

➤ **Shelving**

- IMD-ERV15SD - (2) interior shelves.
- IMD-ERV25SD - (4) interior shelves.
- IMD-ERV35SD - (6) interior shelves.
- Guides and shelves easy to take off for cleaning.

➤ **Refrigeration**

- Temperature and defrost regulated by a digital controller.
- Forced air evaporation system.
- Forced air condensation system.
- Evaporative pan.
- Evaporator coil coated with anti-corrosion material.
- Refrigeration capacity:

IMD-ERV15SD - 1235 Btu/h (14°F) / 443 W (-10°C).

IMD-ERV25SD - 1235 Btu/h (14°F) / 443 W (-10°C).

IMD-ERV35SD - 1467 Btu/h (14°F) / 443 W (-10°C).

OPTIONAL FEATURES

- ✓ Set of 2" Casters, front locking.
- ✓ Electrical connection is 220-230 V / 1ph / 50Hz (plug type varies).
- ✓ Electrical connection is 220-230V / 1ph / 60Hz (plug type varies).

➤ **Electrical**

- Cord and NEMA 5-15P plug.
- Electrical connection is 115 V / 1ph / 60 Hz.



| MODELS | Dimensions (inches) (mm) | | | Doors | Shelves | Ref. | Ref.Weight (Lbs.) (gr.) | Temperature Range (°F) (°C) | Cond. Unit | Capacity (Cu.Ft.) (L) | Case Amps 115V | Crated weight (Lbs.) (Kg.) |
|-------------|--------------------------|-----------------|-----------------|-------|---------|------|-------------------------|-----------------------------|------------|-----------------------|----------------|----------------------------|
| | W | D | H | | | | | | | | | |
| IMD-ERV15SD | 23-3/4 (600) | 20-1/8 (510) | 35-3/4 (907) | 1 | 2 | R290 | 0,17 (80) | 39 °F/54 °F (+4°C/+8°C) | 1/3 | 5 (140) | 3,63 | 160 73 |
| IMD-ERV25SD | 35-1/2 (900) | 20-1/8 (510) | 35-3/4 (907) | 2 | 4 | R290 | 0,22 (100) | 39 °F/54 °F (+4°C/+8°C) | 1/3 | 8 (220) | 3,99 | 187 85 |
| IMD-ERV35SD | 53-1/4 (1350) | 20-1/8 (510) | 35-3/4 (907) | 3 | 6 | R290 | 0,24 (110) | 39 °F/54 °F (+4°C/+8°C) | 1/4 | 11,6 (330) | 4,00 | 213 97 |

Review:03 Date: 11/02/2023 IMD-ERV15_25_35_SD

ETL LISTED TO UL471 STANDARD AND SANITATION CLASSIFIED TO NSF7 – WE RESERVE THE RIGHT TO CHANGE SPECIFICATIONS WITHOUT PRIOR NOTICE



Project: _____

Location: _____

Item #: _____ Quantity: _____

Model #: _____




MODEL: **IMD-ERV15SD / IMD-ERV25SD**
IMD-ERV35SD

BOTTLES COOLER: BLACK FINISH SOLID DOOR




ELEVATION RIGHT VIEW PLANT VIEW





IMD-ERV15SD

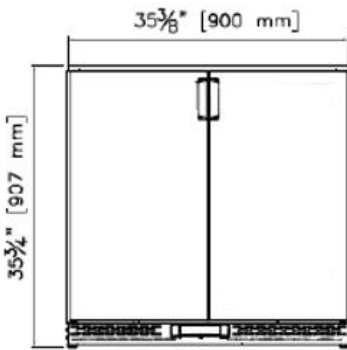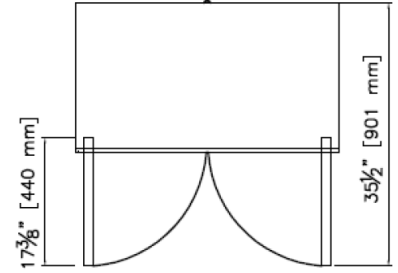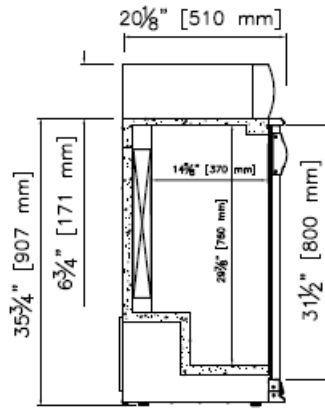

IMD-ERV25SD

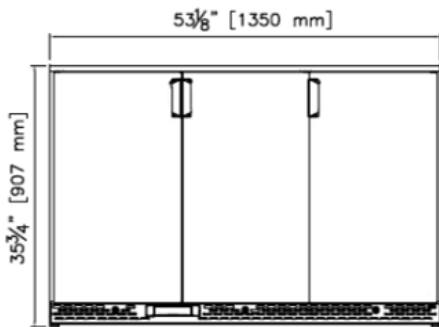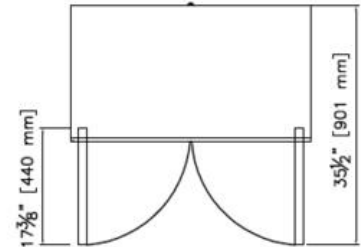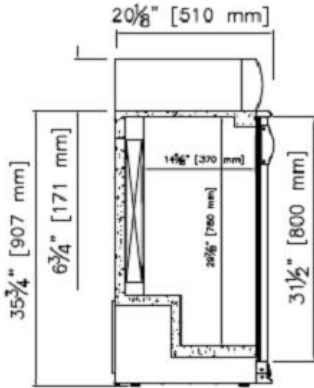

IMD-ERV35SD

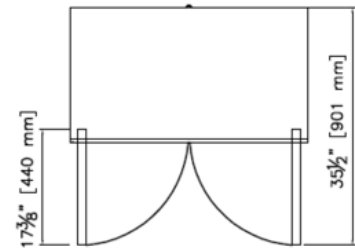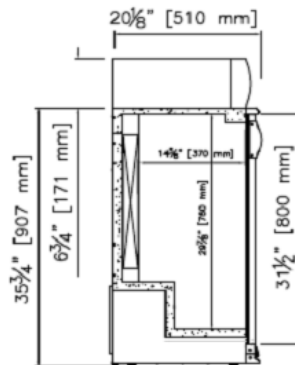

Review:03 Date: 11/02/2023 IMD-ERV15_25_35_SD

ETL LISTED TO UL471 STANDARD AND SANITATION CLASSIFIED TO NSF7 – WE RESERVE THE RIGHT TO CHANGE SPECIFICATIONS WITHOUT PRIOR NOTICE



INFRICO-North America Corporate División
1409NW 84th Avenue, Doral FL 33126
(305) 777 9599 ext.700 / f (305) 777 9598
Toll Free 855-340-4637

www.infrico.us
sales@infrico.com