




NUMBER	DTI-19612UL
MODEL	VBR_PHT
EDITION	0
DATE	14/06/2019
VERSION	.00

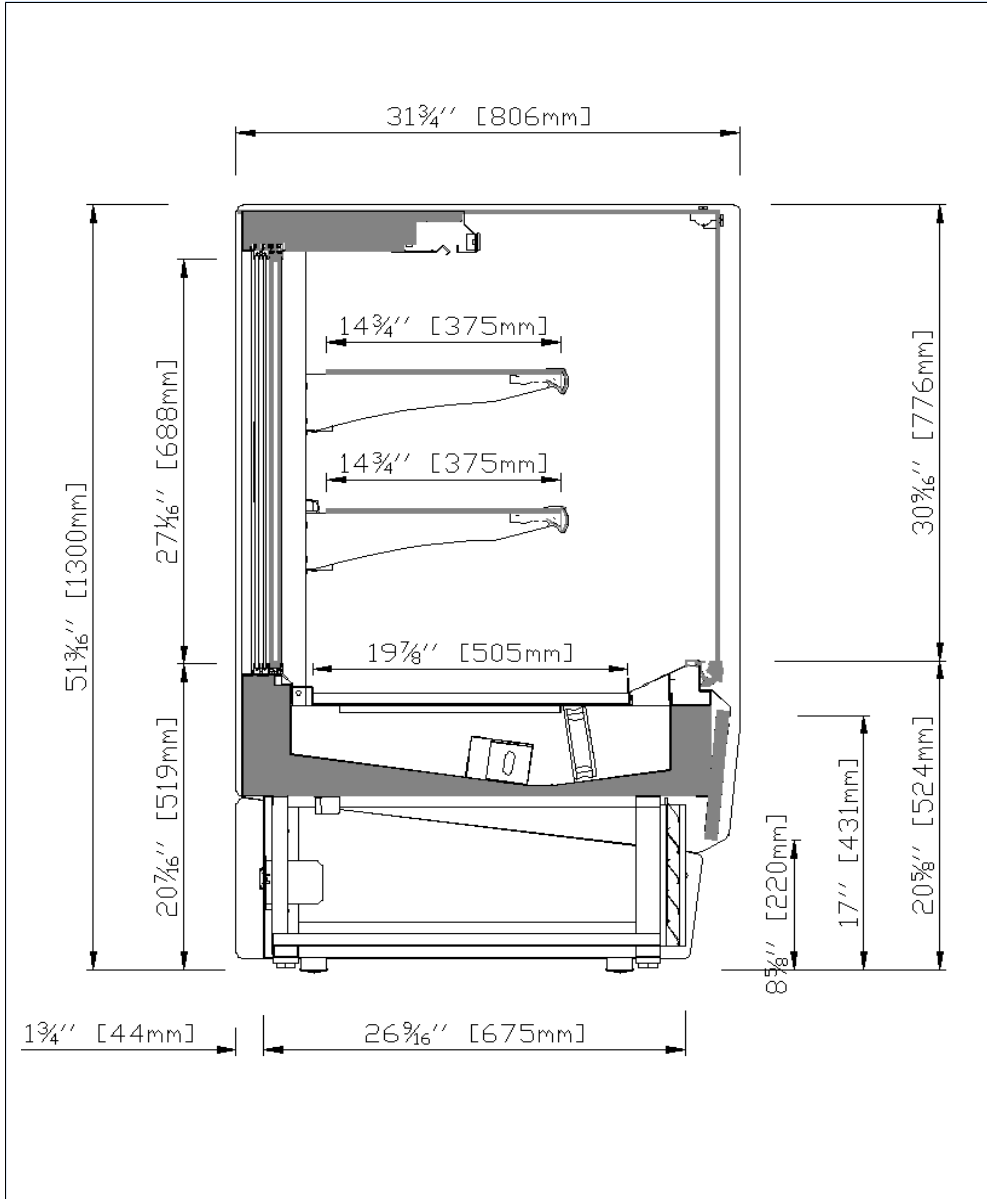


MODEL	
VBR_PHT	
MODULES	

Edition : 0 | Date: 14/06/2019

Code : DTI-19612UL

version: 00

In accordance with:
UL471 and NSF7

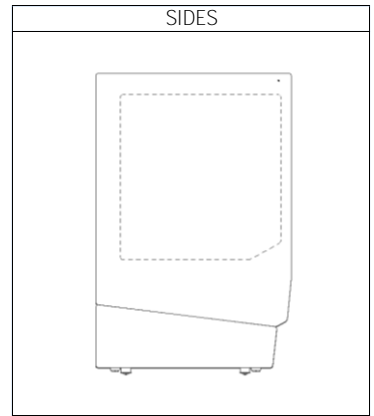

MERCHANDISING DATA

		MODELS		
		VBR9PHT	VBR12PHT	VBR18PHT
Length (with sides included)	in	38 1/2	50 4/5	75 2/5
	mm	978	1290	1915
Refrigerated area	Ft ²	10 3/4	15	22 3/5
	m ²	1,00	1,40	2,10
Useful volume	Ft ³	5 1/2	7 2/7	11
	Lts	155	206	309
TDA - Total Display Area	Ft ²	9	20 4/9	30 1/7
	m ²	0,84	1,90	2,80
N° of shelves		2		
Control		DIGITAL		
Weight	Lbs	430	481	545
	Kg	195	218	247
Packaging dimensions	in	42 4/9 x 60 3/7 x 36	54 5/7 x 60 3/7 x 36	79 1/3 x 60 3/7 x 36
	mm	1078 x 1535 x 915	1390 x 1535 x 915	2015 x 1535 x 915

Volts / Frequency
115v / 60Hz.

NOISE LEVEL
63dB

REFRIGERANT
-

MODEL
VBR PHT

REFRIGERATION DATA - REGULATION AND CONTROL

INTERIOR TEMPERATURE	SET	+ 60 °C	140 °F
	DIFFERENCIAL	5	
DEFROST TYPE	-		
Nº DEFROST / DAY	-		
MAXIMUM DEFROST TIME	-		
END DEFROST TEMPERATURE	- °C	- °F	
MINIMUM DEFROST TIME	-		

In accordance with:	UL471 and NSF7
---------------------	----------------

Room Temperature	Relative humidity	Climate class
+ 25 °C 77 °F	60 %	3

TEMPERATURE CLASSIFICATION


	Climate class	3
PRODUCT TEMPERATURE	+ 40 °C	104 °F
MEDIUM PRODUCT TEMPERATURE	+ 45 °C	113 °F
EVAPORATION	-	
CONDENSATION	-	
EVAPORATION TRAY	-	

INSTALLATION BASE FURNITURE DATA

		MODEL			
			VBR9PHT	VBR12PHT	VBR18PHT
COMPRESSOR	Nº	-	-	-	
	W	-	-	-	
	A	-	-	-	
REFRIGERANT		-			
	gr	-	-	-	
RESISTANCE FAN	Nº	1	1	2	
	W	4,4	4,4	4,4	
	A	0,082	0,082	0,082	
RESISTANCE	Nº	2	2	2	
	W	500	500	500	
	A	4,35	4,35	4,35	
EVAPORATION RESISTANCE	W	-	-	-	
	A	-	-	-	
CANOPY AND SHELVES LIGHTING	LED	W	13,395	17,28	26,64
		A	0,12	0,15	0,23
POWER	W	1018	1022	1035	
	A	8,9	8,9	9,1	
CONSUMPTION	kWh/24h	9,16	13,28	18,64	

LEGS, WHEELS, DRAINS, ELECTRIC BOX

MODEL
VBR_PHT

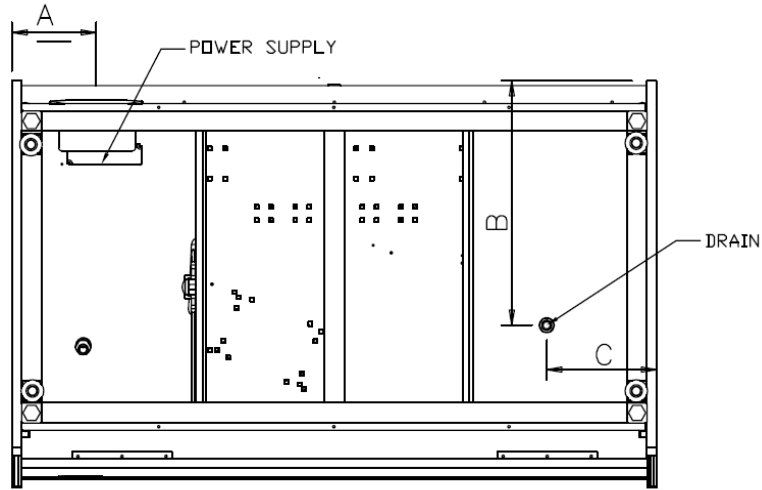

	A		B		C	
	in	mm	in	mm	in	mm
VBR9PR	5 5/7	145	19 1/7	486	4 4/9	113
VBR12PR	6 3/5	168	19 1/7	486	8 2/3	220
VBR18PR	6 3/5	168	19 1/7	486	8 2/3	220