

MODEL: IDC-VLY15
PASTRY DISPLAY CASES – Lyon Series

General Strengths

- ✓ **Modular Line.** Designed for pastry, Viennese and baker. Angles and counter to adapt the line to a determinate space.
- ✓ **Control systems.** Higher precision in managing temperature settings. The ability to adjust temperature ranges to meet end user's requirements.
- ✓ **100% Tested.** All condenser units are 100% tested in helium chambers in order to detect refrigeration leaks.
- ✓ **Certified.** AENOR audited and certified by internationally recognized firm. ISO 9001:2008 (Quality); ISO 14001:2004 (Environmental); OSHAS 18001:2007 (Prevention and Worker Safety)
- ✓ **Lighting.** Interior cabinet includes LED lighting, for brighter lighting and energy efficiency. LED saves 90% more energy compared to traditional fluorescent bulbs. Considerably increases product visibility.



Revision: 01 Date: 09/18/2017 IDC-VLY15_FT_62_1

MODEL	Dimensions (inches) (mm)			Sides	Shelving (11-3/16X15-3/4) / (23-5/8X15-3/4) (300X400) / (600X400)	Ref.	Refrig. Amount (Lbs.) (gr.)	Temp. Range (°F) (°C)	Capacity (Cu. Ft.) (L)	Cond. Unit. H.P.	Case Amps	Crated Weight (Lbs.) (Kg.)
	W	D	H									
IDC-VLY15	61-1/2	35-7/16	51-3/8	1-1/16+1-3/16	6 / 3	R134a	1.21	39°F / 46°F	4.24	1/2	7.0	694
	1562	900	1305	30+30								

ETL LISTED TO UL471 STANDARD AND SANITATION CLASSIFIED TO NSF7 – WE RESERVE THE RIGHT TO CHANGE SPECIFICATIONS WITHOUT PRIOR NOTICE



Infrico USA Corp.
 1409 N.W. 84th Avenue
 Doral, FL 33126
 1.305.777.9599 Office
 1.305.777.9598 Fax

www.infrico.us
service@infrico.com

APPROVALS: _____ AVAILABLE AT: _____

MODEL: IDC-VLY15
PASTRY DISPLAY CASES – Lyon Series
STANDARD FEATURES
➤ Exterior

- AISI 304 18/10 stainless steel lower part decoration,
- White compact quartz worktop,
- Flat tempered security glass system,
- Water resistant frontal and decoration DM lacqued,
- LED lighting frontal decoration,

➤ Interior

- AISI 304 18/10 exhibition area,
- Upper profile LED lighting,

➤ Insulation

- CFC-Free polyurethane insulation, entire cabinet structure is foamed-in place using a high-density polyurethane insulation,
- Low GWP & Zero ODP effect.

➤ Range of colours (lacqued decoration)

- Violet RAL 4007 | Maroon RAL 3003 | Red RAL 3020 | Orange RAL 2003 | Yellow RAL 1018 | Beige RAL 1001 | Blue RAL 5015 | Blue Ciel RAL DESING 2108025 | Green Dark RAL 6002 | Pink RAL DESING 3504035 | Pistachio RAL DESING 1107060 | White RAL 9016 | Black RAL 9017.

➤ Refrigeration

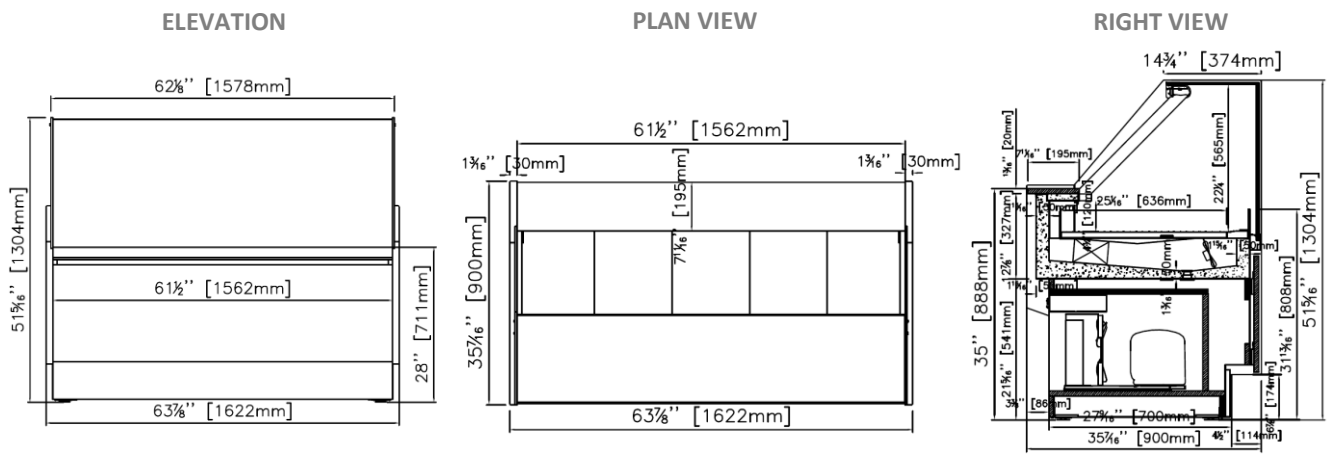
- Digital temperature controller with automatic defrost system,
- Forced air refrigeration systems,
- Control of the final defrost temperature,
- Automatic evaporative tray,
- Case engineered to operate at 75°F (24°C) and 55% relative humidity.

OPTIONAL FEATURES

- ✓ LED lighting shelf,
- ✓ Anodized aluminum profile shelves,
- ✓ Rear sliding doors,
- ✓ Electrical connection is 220-230 V / 1ph / 50 Hz (plug type varies).

➤ Electrical

- Cord and NEMA 5-15P plug,
- Electrical connection is 115V / 1ph / 60 Hz.
- 20 AMP breakers required,


➤ ETL Listed to UL471 Standard and Sanitation classified to NSF7.
PLAN VIEW


ETL LISTED TO UL471 STANDARD AND SANITATION CLASSIFIED TO NSF7 – WE RESERVE THE RIGHT TO CHANGE SPECIFICATIONS WITHOUT PRIOR NOTICE